



EXISTING TREE SCHEDULE											
SYMBOL USED ON PLAN		PLANT NAME		NATIVE SPECIES		CALIPER		HEIGHT	Q.TY	REMARK	
Symbol	Exist.	Scientific	Common	Yes	No	DBH	Canopy	Installed			
	1	X	Phoenix dactylifera	Date palm tree	X	6"	5'	10' -0"	1	Remain	
	2	X	Phoenix dactylifera	Date palm tree	X	6"	5'	10' -0"	1	Remain	
	3	X	Phoenix dactylifera	Date palm tree	X	6"	5'	10' -0"	1	Remain	
	4	X	Ravenala madagascariensis	Travelers palms	X	10"	10'	25' -0"	8	Relocated in Lot	
	5	X	Phoenix dactylifera	Date palm tree	X	6"	8'	10' -0"	1	Relocated in Lot	
	6	X	Phoenix dactylifera	Date palm tree	X	6"	8'	10' -0"	1	Relocated in Lot	
	7	X	Dypsis lutescens	Arecas palms	X	3.5"	5'	10' -0"	16	Relocated in Lot	
	8	X	Phoenix dactylifera	Date palm tree	X	4"	6'	8' -0"	4	Relocated in Lot	
	9	X	Dypsis lutescens	Arecas palms	X	3.5"	5'	15' -0"	15	Relocated in Lot	
	10	X	Sabal palmetto	Cabbage palmetto	X	10"	10'	12' -0"	1	Relocated in Lot	
TOTAL REMAIN TREE										49	

- NOTE:
- Existing landscape must be inspected for damaged trees and shrubs must be replaced. Refer to Tree Resource Evaluation Report attached.
 - Transplant Condition:
Great care and ANSI standards strictly followed to make a successful transplant of relocated tree and not cut a small root ball to cheat. Adequate watering prior to root pruning to minimize stress recommended as well. Professional only job to protect bark, cambium, etc.
 - Landscape Contractor to contact Carolina Rojas at 305 234 2121 to register of the Village of Pinecrest as a Landscape Contractor.

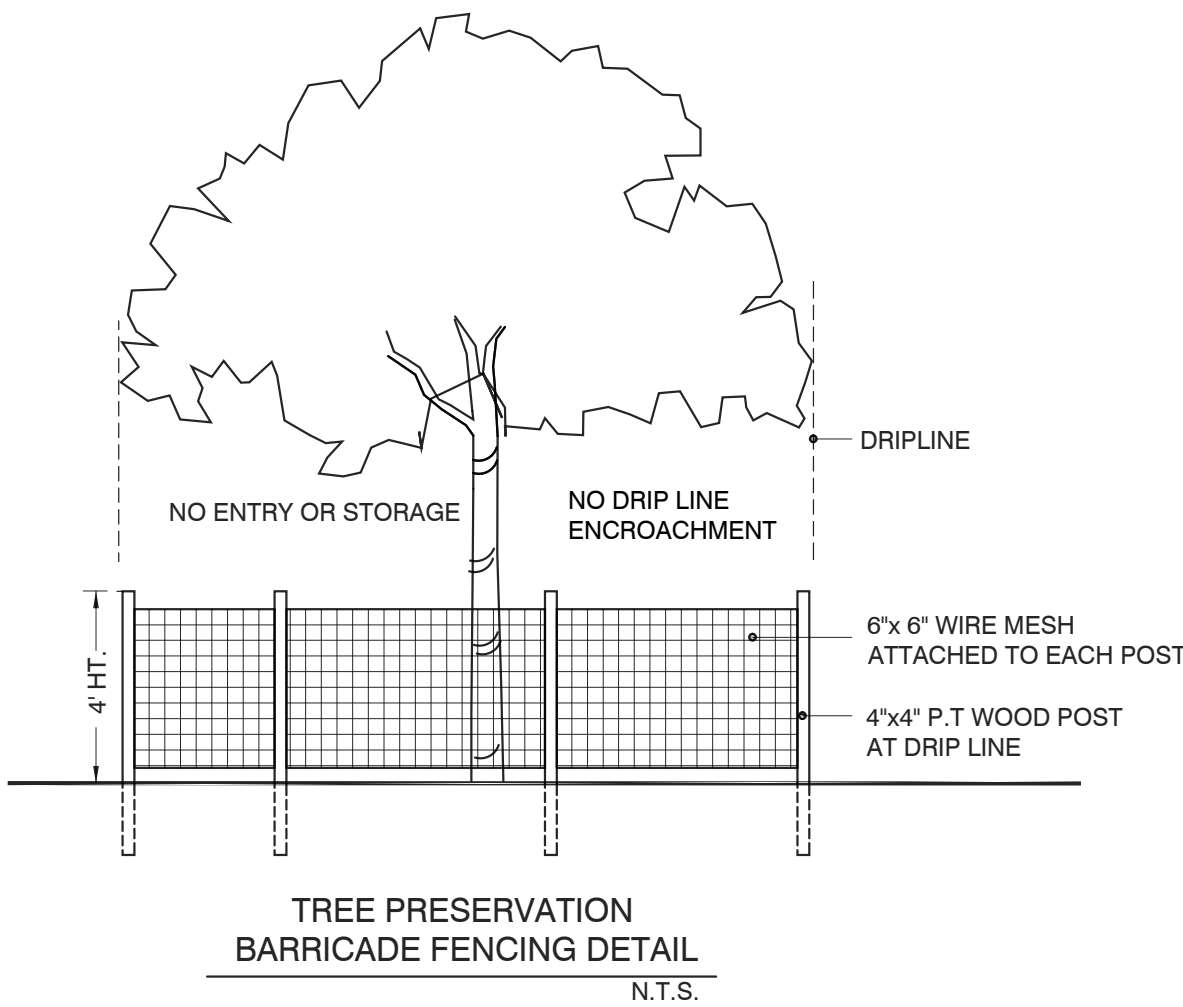

NOTES:

- THE CONTRACTOR IS RESPONSIBLE FOR DETERMINING ALL UTILITY LOCATIONS AND INSTALLING FACILITIES SO AS TO NOT CONFLICT. REFER TO THE 'UTILITY' SECTION OF THE NOTES ON THE ENGINEERING PLANS.
- THE CONTRACTOR SHALL COMPLY WITH ALL COUNTY AND MUNICIPAL CODES AND ORDINANCES. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL APPLICABLE PERMITS UNLESS OTHERWISE DIRECTED BY THE PROJECT ENGINEER.
- EXISTING TREES AND PALMS TO REMAIN SHALL BE PROTECTED DURING CONSTRUCTION. AN 4' HT CHAIN LINK FENCE SHALL BE INSTALLED AROUND THE TREES AND PALMS TO REMAIN (SEE TREE PRESERVATION BARRICADE FENCING DETAIL ON SHEET TRD-1)
- THE CONTRACTOR IS RESPONSIBLE FOR CLEAN-UP OF DEBRIS RESULTING FROM LANDSCAPE CONSTRUCTION ACTIVITIES. THIS SHALL INCLUDE, BUT NOT BE LIMITED TO, THE REMOVAL OF ALL DEBRIS INCLUDING TRASH, LARGE ROCKS, BOTTLES, CANS, STAKES, WIRE, ETC.
- THE SEQUENCE OF TREE PRESERVATION MEASURES, IF REQUIRED, SHALL BE AS FOLLOWS:
A. ROOT PRUNING TRENCHING; C. TREE PRUNING AND CHEMICAL TREATMENT;
B. TREE PROTECTION FENCING; D. AERATION SYSTEMS INSTALLED;
- TREE PROTECTION FENCING SHALL BE MAINTAINED AND REPAIRED BY THE CONTRACTOR FOR THE DURATION CONSTRUCTION AND APPROVED BY THE CITY INSPECTOR. NO ALTERATION SHALL OCCUR WITHOUT PRIOR APPROVAL BY A CITY REPRESENTATIVE.
- ACCESS TO FENCED PRESERVATION AREAS BY CONSTRUCTION EQUIPMENT, MATERIALS, OR INDIVIDUALS THAT MAY CAUSE HARM TO PROTECTED TREES WILL NOT BE ALLOWED. ONLY LIMITED ACCESS, IF NECESSARY, SHALL BE PERMITTED WITH THE PRIOR APPROVAL OF THE CITY INSPECTOR.
- ALL DESIGNATED AERATION ZONES SHALL BE PROTECTED WITH TEMPORARY FENCING UNTIL FINAL GRADING.
- REMOVAL OF TREES, SHRUBS, OR UNDERGROWTH FROM PROTECTED AREAS SHALL BE PERFORMED ONLY WHEN NECESSARY AND WITH HAND TOOLS ONLY.
- ATTACHMENT OF ANY CONSTRUCTION SIGNS, FENCING, ETC. TO ANY TREE TO BE SAVED IS STRICTLY PROHIBITED.
- UPON CONSTRUCTION COMPLETION, ALL TEMPORARY BARRIERS, FENCING, DEBRIS, ETC. SHALL BE REMOVED FROM THE SITE BY THE CONTRACTOR.
- ALL REQUIRED PROTECTIVE FENCING SHALL BE INSTALLED ALONG THE CLEARING DISTURBANCE LIMITS OF THE SITE.
- PROTECTIVE FENCING SHALL BE INSTALLED ALONG THE EDGE OF ALL CRITICAL ROOT ZONES OF SAVED AND IMPACTED TREES WITHIN THE DISTURBED AREAS.

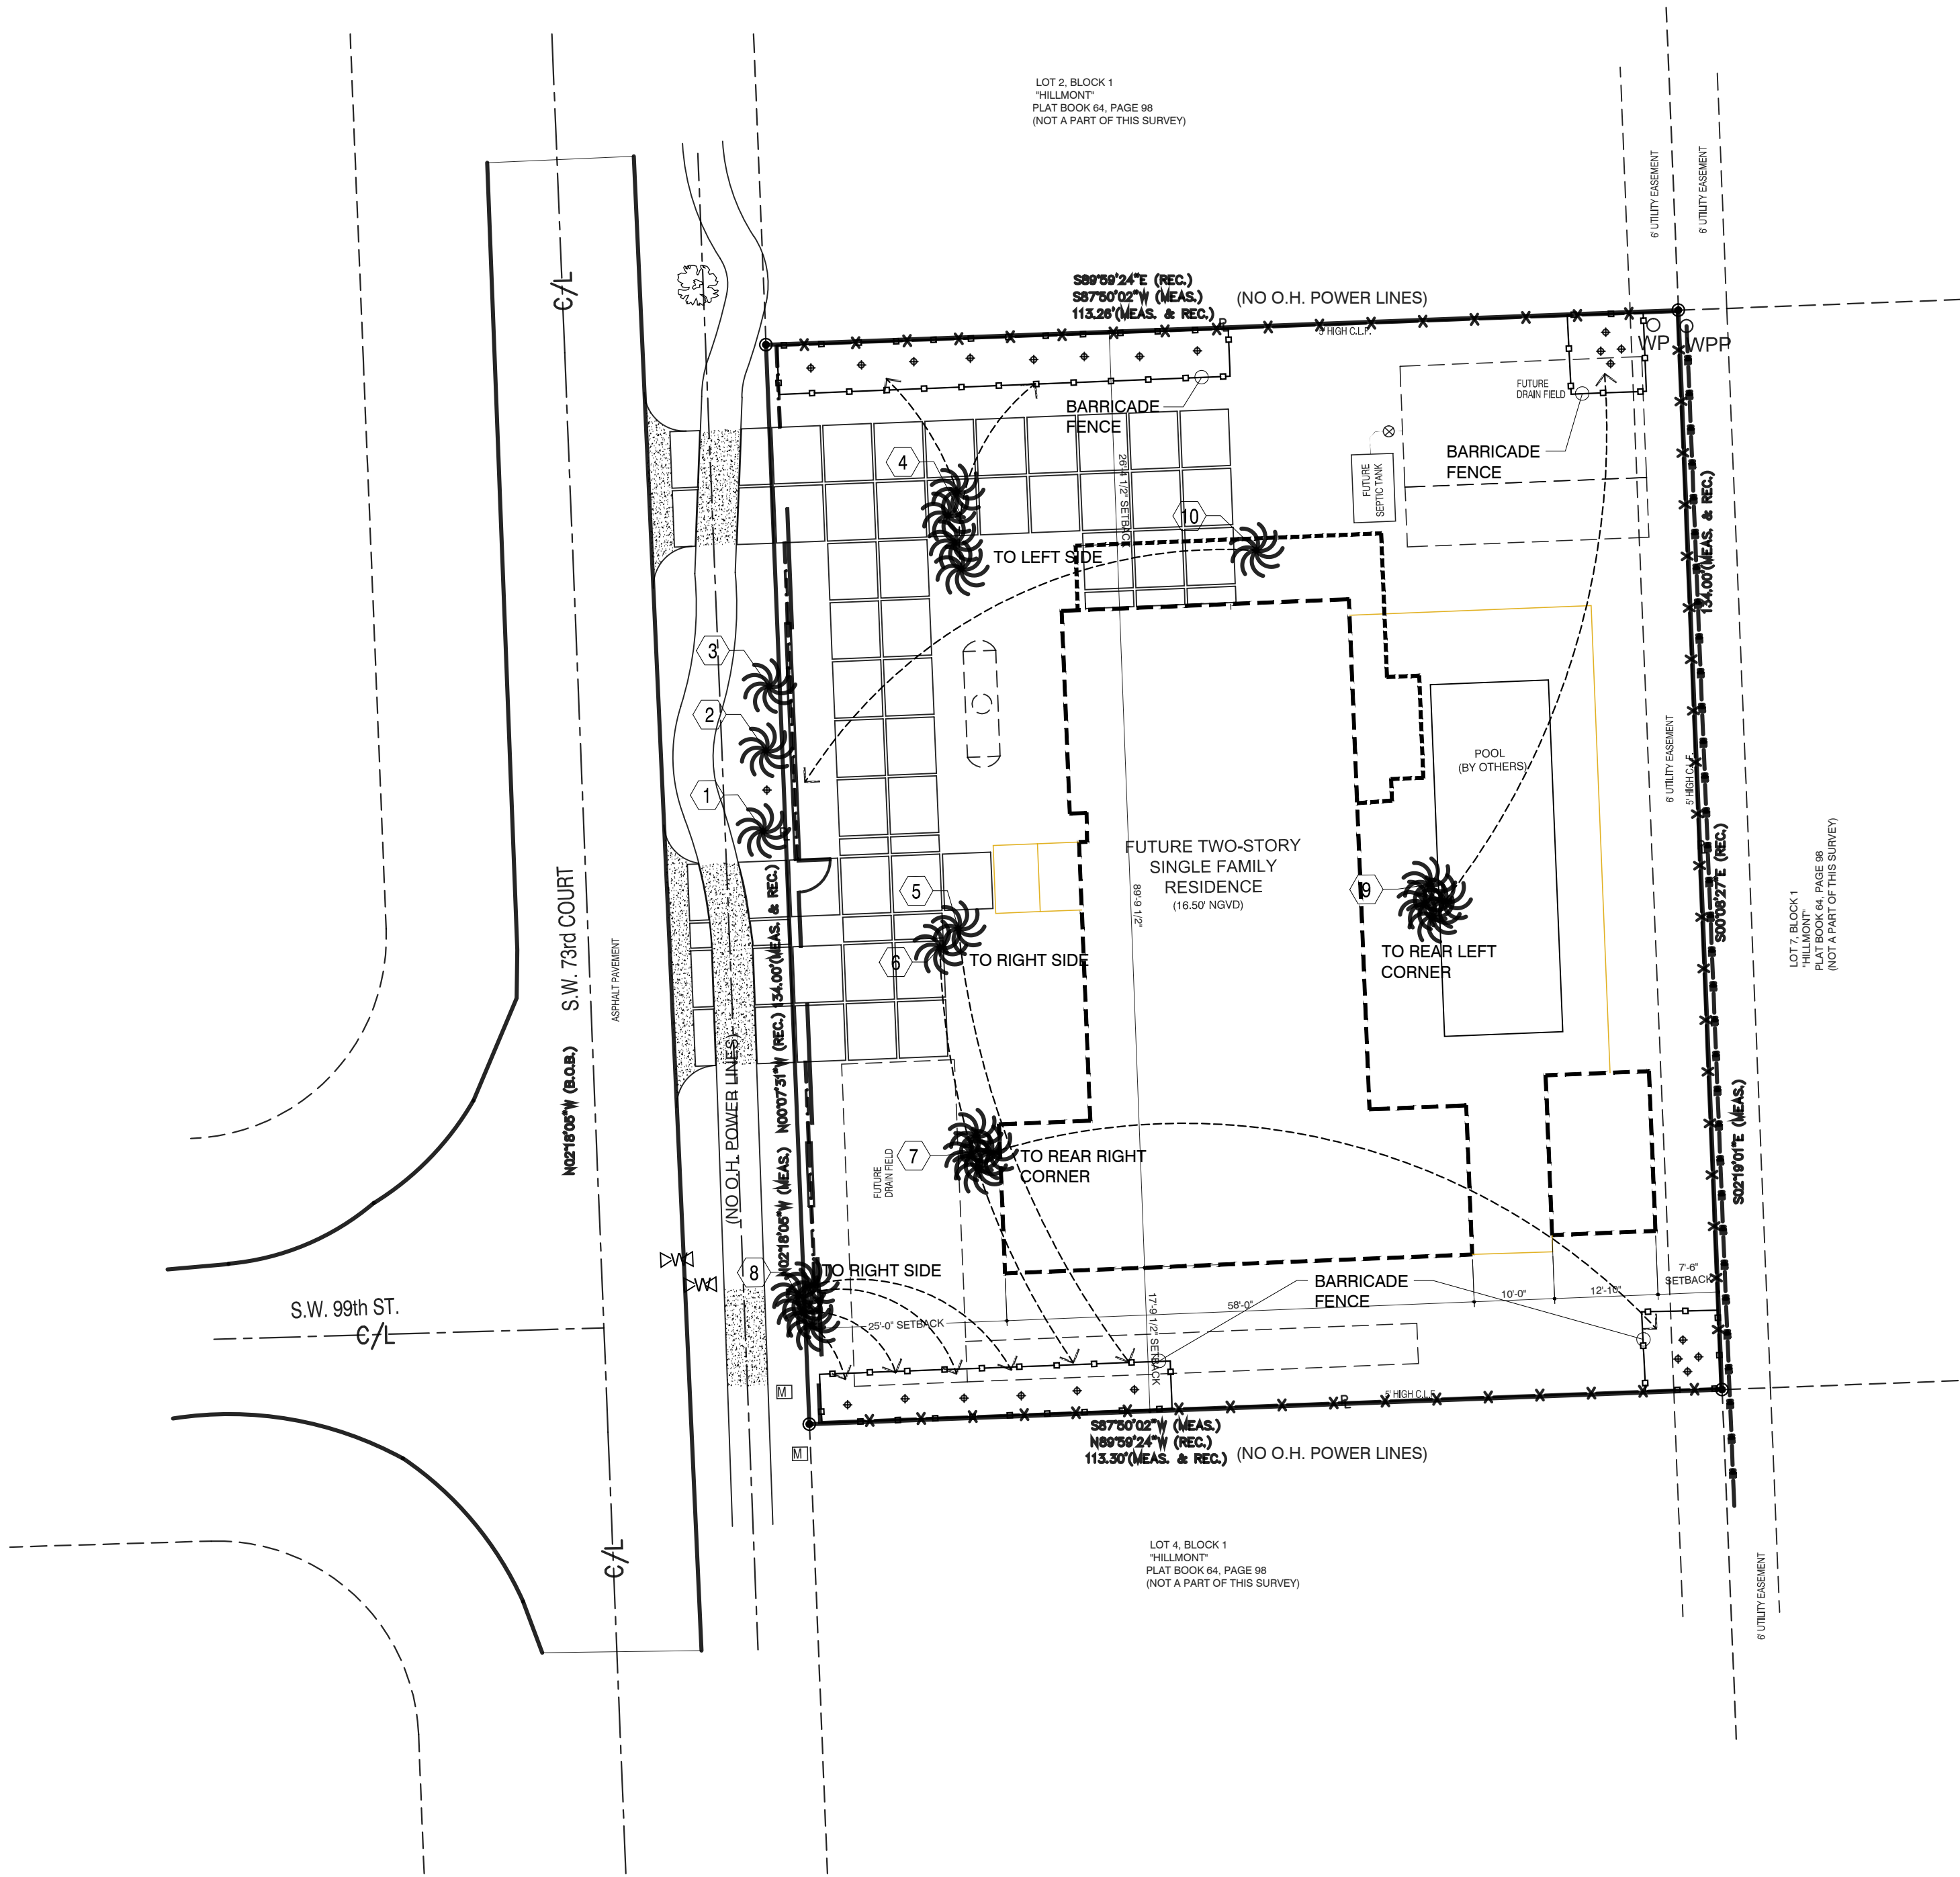

TREE DISPOSITION PLAN

SCALE: 1" = 10'-0"

RAMOSMARTINEZarchitects

MIAMI 655 W. FLAGLER ST. SUITE 205 MIAMI, FL 33130
NEW YORK 11 ERIE STREET 2nd FLOOR JERSEY CITY, NJ 07302
REGISTRATION: A.A. 26000528
WEBSITE: www.rmzg.com
TELEPHONE: 305-548-3006


NEW RESIDENCE
FOR
ELIGES INVESTORS CONSTRUCTION
AT
9841 SW 73rd COURT
PINECREST, FLORIDA 33156

STRUCTURAL ENGINEER:
EASTERN ENGINEERING
3401 NW 82nd AVE. SUITE 370
MIAMI, FLORIDA 33122 305-599-8133

MECHANICAL ENGINEER:
ORLANDO RANGEL, P.E. - 60225
9940 SW 37th STREET, MIAMI, FLORIDA 33156
TEL: 786-547-3517

CIVIL ENGINEER:
ANDRE D. MARTINEZ, P.E. - 85425
AM CIVIL ENGINEERS & PLANNERS
860 SW 21st STREET MIAMI, FLORIDA 33136
TEL: 786-289-9414 amcivildesign@gmail.com


LANDSCAPE ARCHITECT:
CASTO MIGUEL JUNCAL, RLA
LA 6667184
25445 SW 53RD AVE.
CUTLER BAY FL 33189
786-877-2034

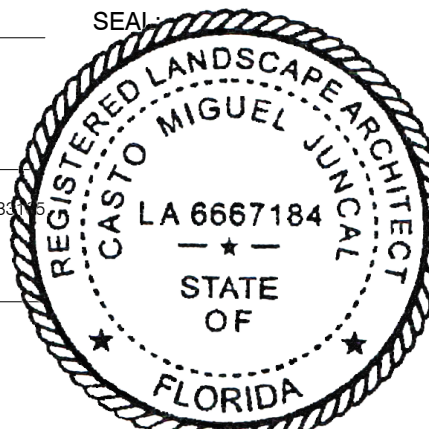

ARCHITECT:
HUMBERTO RAMOS
ART 0017833

COPYRIGHT - 2021 - RAMOSMARTINEZarchitects, inc.
THE DESIGNS, IDEAS AND DETAIL INDICATED OR REPRESENTED BY THIS DRAWING, CREATED AND DEVELOPED FOR USE ON THIS PROJECT, ARE OWNED BY AND THE LEGAL PROPERTY OF RAMOSMARTINEZ architects, inc. USE, REPRODUCTION, DISTRIBUTION OR ALTERATION IS PROHIBITED WITHOUT WRITTEN AUTHORIZATION BY THE ARCHITECT.

KEY PLAN:



COMM. NO.: 17-117 NO: REVISION: DATE:

DATE: JANUARY, 2022

DRAWN BY:

CONTENT: TREE DISPOSITION PLAN

SHEET NUMBER:

L-0