

04
03E
A-05.2
B
A-05.0MASTER
FOYEREL. 10'-0"
AFF8
A-06.4G
A-05.2AC
CLO 3POWDER
BATH 2EL. 11'-4"
AFF


STAIR

6
A-06.3BREAKFAST
NOOKEL. 11'-4"
AFFPOWDER
BATH

HB

LED
MIRROR7
A-06.4E
A-05.2B
A-05.004
03

NOTES

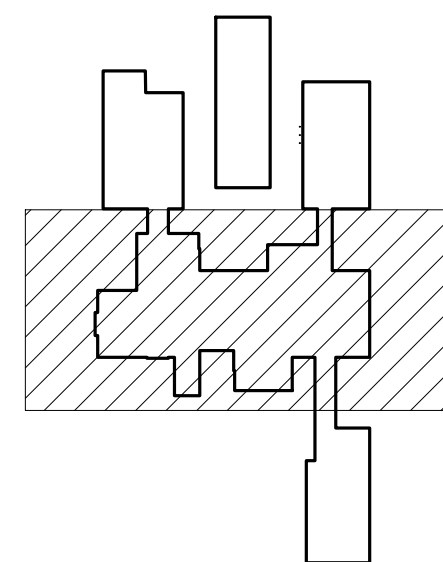

KEY PLAN

SCALE: 1/4" = 1'-0"

LOCUS
ARCHITECTURE
INCORPORATED
500 South Dixie Highway, Suite 307
Coral Gables, Florida 33146
Tel. (305) 740-0120
Email locus@locusarchitecture.net
License AR 13937

CONSULTANT(S)

NO.	REVISION/SUBMISSION	DATE
1	OWNER REVIEW	04-08-24
2	PERMIT SUBMITTAL	06-07-24

PROJECT

New 2-Story Residence:
6100 W Suburban Dr, Pinecrest, FL 33156

DRAWING

Partial First Reflected
Ceiling Plan: 03

SEAL

Nelson de Leon
AR 13937

SHEET NO.

SCALE

DRAWN

REVIEWED

NDL

PROJ. NO.

351

A-03.2

NOTES

1. MAINTAIN A MINIMUM DISTANCE OF 10" BETWEEN THE WALL AND THE EDGE OF ANY CEILING MOUNTED DIFFUSERS.
2. CENTER ALL LIGHTS AND DIFFUSERS AS SHOWN ON THIS PLAN. COORDINATE WITH ARCHITECT ANY CONFLICTS.
3. GC TO COORDINATE SECURITY, SOUND, DATA LOCATIONS WITH OWNER'S CONSULTANT.
4. SEE EXTERIOR AND INTERIOR ELEVATIONS FOR ALL WALL MOUNTED LIGHT AND SCONCE HEIGHT LOCATIONS.
5. COORD W/ OWNER LOCATION OF LIGHTS ON DIMMERS.
6. SPACE WALL OUTLETS 4" APART AND ALIGN TOPS AT ALL LOCATIONS WITH 2 OR MORE OUTLETS/SWITCHES.
7. CENTERLINE ALL AC EQUIPMENT WITH CEILING LIGHTS WHEREVER POSSIBLE.

LEGEND

● RECESSED DOWNLIGHT	⊗ SECURITY LIGHT	▣ RETURN AIR DIFFUSER
⊙ RECESSED WALL WASHER	--- UC LIGHT OR LED STRIP	⊗ SUPPLY AIR DIFFUSER
⊙ WALL MOUNTED LIGHT	▬ PICTURE LIGHT (WALL MTD)	
⊙ WALL MOUNTED SCONCE	TV TV OUTLET	
⊙ SMOKE DETECTOR	⊙ WALL FAN	⊙ CEILING FAN (RATED FOR 100 LBS MINIMUM CAPACITY) W/ LIGHT
⊙ EXHAUST FAN	⊙ SURFACE MOUNTED LIGHT	⊙ SPEAKER (SOUND)-COORD. LOCATIONS WITH OWNER REP.
⊙ JUNCTION BOX (RATED FOR 100 LBS MINIMUM CAPACITY)	⊙ PENDANT LIGHT OR CHANDELIER (BOX RATED FOR 100 LBS)	
		— LINEAR DIFFUSER.

03
02A
A-05.0G
A-05.2D
A-05.1C
A-05.16
A-06.3A
A-05.003
02H
A-05.2

PARTIAL FIRST RCP: 03

SCALE: 1/4" = 1'-0"

