

RESIDENTIAL ENERGY CONSERVATION CODE DOCUMENTATION CHECKLIST

Florida Department of Business and Professional Regulation Simulated Performance Alternative (Performance) Method

Applications for compliance with the 2023 Florida Building Code, Energy Conservation via the Residential Simulated Performance Alternative shall include:

- ☒ This checklist
- ☒ Form R405-2023 report
- ☐ Input summary checklist that can be used for field verification (usually four pages/may be greater)
- ☐ Energy Performance Level (EPL) Display Card (one page)
- ☐ HVAC system sizing and selection based on ACCA Manual S or per exceptions provided in Section R403.7
- ☒ Mandatory Requirements (five pages)

Required prior to CO:

- ☒ Air Barrier and Insulation Inspection Component Criteria checklist (Table R402.4.1.1 - one page)
- ☐ A completed 2023 Envelope Leakage Test Report (usually one page); exception in R402.4 allows dwelling units of R-2 Occupancies and multiple attached single family dwellings to comply with Section C402.5
- ☐ If Form R405 duct leakage type indicates anything other than "default leakage", then a completed 2023 Duct Leakage Test Report - Performance Method (usually one page)

INPUT SUMMARY CHECKLIST REPORT

PROJECT

Title:New residence @ 11041 SW 77th Ave

Address type:Street Address

Building Type:User

Bedrooms:9

Owner:

Conditioned Area:12617

Lot #:---

Builder Home ID:

Total Stories:2

Block/SubDivision:---

Builder Name:

Worst Case:No

Street:11041 SW 77th Ave

Permit Office:

Rotate Angle:0

County:Miami-Dade

Jurisdiction:231000

Cross Ventilation:No

City, State, Zip:Miami, FL, 33156

Family Type:Detached

Whole House Fan:No

New/Existing:New (From Plans)

Terrain:Suburban

Year Construct:

Shielding:Suburban

Comment:

CLIMATE

✓

Design Location

Tmy Site

Design Temp97.5%2.5%

Int Design TempWinterSummer

Heating Degree Days

Design Moisture

Daily temp Range

FL, Miami

FL_MIAMI_INTL_AP

5190

7075

149.5

56

Low

BLOCKS

✓

Number

Name

Area

Volume

1Block1230032200 cu ft

2Block2239633544 cu ft

3Block3248334762 cu ft

4Block45247336 cu ft

5Block5491456511 cu ft

SPACES

✓

Number

Name

Area

Volume

Kitchen

Occupants

Bedrooms

Finished

Cooled

Heated

1AC1230032200Yes91YesYesYes

2AC2239633544No90YesYesYes

3AC3248334762No62YesYesYes

4AC45247336No21YesYesYes

5AC5247128417No41YesYesYes

6AC6244328095No44YesYesYes

FLOORS

(Total Exposed Area = 7984 sq.ft.)

✓

#

Floor Type

Space

Exposed Perim(ft)

Area

R-Value Perim.

U-Factor Joist

Slab Insul. Vert/Horiz

Tile

Wood

Carpet

1Slab-On-Grade Edge InsAC12502300 sqft0---0.7102 (ft)/0 (ft)1.000.000.00

2Slab-On-Grade Edge InsAC23012396 sqft0---0.7102 (ft)/0 (ft)1.000.000.00

3Slab-On-Grade Edge InsAC32172483 sqft0---0.7102 (ft)/0 (ft)1.000.000.00

4Slab-On-Grade Edge InsAC497524 sqft0---0.7102 (ft)/0 (ft)1.000.000.00

5Floor over GarageAC5---281 sqft---110.079-----1.000.000.00

6Floor Over Other SpaceAC5---689 sqft---110.073-----1.000.000.00

7Floor Over Other SpaceAC5---1502 sqft---110.073-----1.000.000.00

8Floor Over Other SpaceAC6---366 sqft---110.073-----1.000.000.00

9Floor Over Other SpaceAC6---2077 sqft---110.073-----1.000.000.00

INPUT SUMMARY CHECKLIST REPORT

ROOF													
✓ #	Type	Materials	Roof Area	Gable Area	Roof Color	Rad Barr	Solar Absor.	SA Tested	Emitt	Emitt Tested	Deck Insul.	Pitch (deg)	
___ 1	Flat	Concrete	8004 ft²	332 ft²	Dark	N	0.96	No	0.9	No	30	4.76	

ATTIC						
✓ #	Type	Ventilation	Vent Ratio (1 in)	Area	RBS	IRCC
___ 1	No attic	Unvented	0	7976 ft²	N	N

CEILING (Total Exposed Area = 7975 sq.ft.)								
✓ #	Ceiling Type	Space	R-Value	Ins. Type	Area	U-Factor	Framing Frac.	Truss Type
___ 1	Single assembly, with airspace(Unvented)	AC1	0.0	Blown	1614.0ft²	0.030	0.11	Wood
___ 2	Single assembly, with airspace(Unvented)	AC2	0.0	Blown	520.0ft²	0.030	0.11	Wood
___ 3	Single assembly, with airspace(Unvented)	AC3	0.0	Blown	403.0ft²	0.030	0.11	Wood
___ 4	Single assembly, with airspace(Unvented)	AC4	0.0	Blown	524.0ft²	0.030	0.11	Wood
___ 5	Single assembly, with airspace(Unvented)	AC5	0.0	Blown	2471.0ft²	0.030	0.11	Wood
___ 6	Single assembly, with airspace(Unvented)	AC6	0.0	Blown	2443.0ft²	0.030	0.11	Wood

WALLS (Total Exposed Area = 12899 sq.ft.)															
✓ #	Ornt	Adjacent To	Wall Type	Space	Cavity R-Value	Width Ft	In	Height Ft	In	Area sq.ft.	U-Factor	Sheath R-Value	Frm. Frac.	Solar Absor.	Below Grade
___ 1	W	Exterior	Conc. Blk - Ext Ins	AC2	5.0	39.0	10	14.0	0	557.7	0.117	0	0	0.30	0 %
___ 2	N	Exterior	Conc. Blk - Ext Ins	AC2	5.0	13.0	8	14.0	0	191.3	0.117	0	0	0.30	0 %
___ 3	S	Exterior	Conc. Blk - Ext Ins	AC2	5.0	13.0	8	14.0	0	191.3	0.117	0	0	0.30	0 %
___ 4	N	Exterior	Conc. Blk - Ext Ins	AC2	5.0	14.0	3	14.0	0	199.5	0.117	0	0	0.30	0 %
___ 5	W	Garage	Conc. Blk - Ext Ins	AC2	5.0	22.0	0	14.0	0	308.0	0.117	0	0	0.01	0 %
___ 6	N	Garage	Conc. Blk - Ext Ins	AC2	5.0	9.0	7	14.0	0	134.2	0.117	0	0	0.01	0 %
___ 7	S	Garage	Conc. Blk - Ext Ins	AC2	5.0	5.0	0	14.0	0	70.0	0.117	0	0	0.01	0 %
___ 8	NW	Garage	Conc. Blk - Ext Ins	AC2	5.0	4.0	11	14.0	0	68.8	0.117	0	0	0.01	0 %
___ 9	S	Exterior	Conc. Blk - Ext Ins	AC2	5.0	7.0	10	14.0	0	109.7	0.117	0	0	0.30	0 %
___ 10	W	Exterior	Conc. Blk - Ext Ins	AC1	5.0	11.0	10	14.0	0	165.7	0.117	0	0	0.30	0 %
___ 11	S	Exterior	Conc. Blk - Ext Ins	AC1	5.0	41.0	6	14.0	0	581.0	0.117	0	0	0.30	0 %
___ 12	E	Exterior	Conc. Blk - Ext Ins	AC1	5.0	12.0	0	14.0	0	168.0	0.117	0	0	0.30	0 %
___ 13	S	Exterior	Conc. Blk - Ext Ins	AC1	5.0	45.0	2	14.0	0	632.3	0.117	0	0	0.30	0 %
___ 14	E	Exterior	Conc. Blk - Ext Ins	AC1	5.0	26.0	1	14.0	0	365.2	0.117	0	0	0.30	0 %
___ 15	N	Exterior	Conc. Blk - Ext Ins	AC1	5.0	26.0	3	14.0	0	367.5	0.117	0	0	0.30	0 %
___ 16	E	Exterior	Conc. Blk - Ext Ins	AC2	5.0	39.0	10	14.0	0	557.7	0.117	0	0	0.30	0 %
___ 17	E	Exterior	Conc. Blk - Ext Ins	AC3	5.0	6.0	7	14.0	0	92.2	0.117	0	0	0.30	0 %
___ 18	S	Exterior	Conc. Blk - Ext Ins	AC3	5.0	16.0	8	14.0	0	233.3	0.117	0	0	0.30	0 %
___ 19	E	Exterior	Conc. Blk - Ext Ins	AC3	5.0	30.0	9	14.0	0	430.5	0.117	0	0	0.30	0 %
___ 20	N	Exterior	Conc. Blk - Ext Ins	AC3	5.0	72.0	6	14.0	0	1015.0	0.117	0	0	0.30	0 %
___ 21	W	Exterior	Conc. Blk - Ext Ins	AC3	5.0	21.0	6	14.0	0	301.0	0.117	0	0	0.30	0 %
___ 22	SW	Exterior	Conc. Blk - Ext Ins	AC3	5.0	8.0	10	14.0	0	123.7	0.117	0	0	0.30	0 %
___ 23	W	Exterior	Conc. Blk - Ext Ins	AC3	5.0	12.0	6	14.0	0	175.0	0.117	0	0	0.30	0 %
___ 24	W	Exterior	Conc. Blk - Ext Ins	AC4	5.0	14.0	11	14.0	0	208.8	0.117	0	0	0.30	0 %
___ 25	S	Exterior	Conc. Blk - Ext Ins	AC4	5.0	29.0	0	14.0	0	406.0	0.117	0	0	0.30	0 %
___ 26	E	Exterior	Conc. Blk - Ext Ins	AC4	5.0	14.0	11	14.0	0	208.8	0.117	0	0	0.30	0 %
___ 27	N	Exterior	Conc. Blk - Ext Ins	AC4	5.0	7.0	8	14.0	0	107.3	0.117	0	0	0.30	0 %
___ 28	E	Exterior	Conc. Blk - Ext Ins	AC4	5.0	4.0	7	14.0	0	64.2	0.117	0	0	0.30	0 %
___ 29	N	Exterior	Conc. Blk - Ext Ins	AC4	5.0	13.0	8	14.0	0	191.3	0.117	0	0	0.30	0 %
___ 30	W	Exterior	Conc. Blk - Ext Ins	AC4	5.0	4.0	7	14.0	0	64.2	0.117	0	0	0.30	0 %
___ 31	N	Exterior	Conc. Blk - Ext Ins	AC4	5.0	7.0	8	14.0	0	107.3	0.117	0	0	0.30	0 %
___ 32	W	Exterior	Conc. Blk - Ext Ins	AC5	5.0	18.0	0	11.5	0	207.0	0.117	0	0	0.30	0 %
___ 33	N	Exterior	Conc. Blk - Ext Ins	AC5	5.0	13.0	11	11.5	0	160.0	0.117	0	0	0.30	0 %

INPUT SUMMARY CHECKLIST REPORT

WALLS(Continued)

___ 34 W	Exterior	Conc. Blk - Ext Ins	AC5	5.0	12.0	10	11.5	0	147.6	0.117	0	0	0.30	0 %
___ 35 S	Exterior	Conc. Blk - Ext Ins	AC5	5.0	13.0	11	11.5	0	160.0	0.117	0	0	0.30	0 %
___ 36 N	Exterior	Conc. Blk - Ext Ins	AC5	5.0	23.0	10	11.5	0	274.1	0.117	0	0	0.30	0 %
___ 37 NW	Exterior	Conc. Blk - Ext Ins	AC5	5.0	29.0	4	11.5	0	337.3	0.117	0	0	0.30	0 %
___ 38 S	Exterior	Conc. Blk - Ext Ins	AC5	5.0	50.0	0	11.5	0	575.0	0.117	0	0	0.30	0 %
___ 39 SE	Exterior	Conc. Blk - Ext Ins	AC5	5.0	62.0	10	11.5	0	722.6	0.117	0	0	0.30	0 %
___ 40 SE	Exterior	Conc. Blk - Ext Ins	AC6	5.0	16.0	11	11.5	0	194.5	0.117	0	0	0.30	0 %
___ 41 S	Exterior	Conc. Blk - Ext Ins	AC6	5.0	18.0	6	11.5	0	212.8	0.117	0	0	0.30	0 %
___ 42 E	Exterior	Conc. Blk - Ext Ins	AC6	5.0	29.0	0	11.5	0	333.5	0.117	0	0	0.30	0 %
___ 43 N	Exterior	Conc. Blk - Ext Ins	AC6	5.0	56.0	2	11.5	0	645.9	0.117	0	0	0.30	0 %
___ 44 NW	Exterior	Conc. Blk - Ext Ins	AC6	5.0	20.0	11	11.5	0	240.5	0.117	0	0	0.30	0 %
___ 45 W	Exterior	Conc. Blk - Ext Ins	AC6	5.0	25.0	4	11.5	0	291.3	0.117	0	0	0.30	0 %

DOORS

(Total Exposed Area = 611 sq.ft.)

✓ #	Ornt	Adjacent To	Door Type	Space	Storms	U-Value	Width Ft	In	Height Ft	In	Area
___ 1	W(Front)		Insulated	AC2	Metal	0.46	7.00	6	12.00	1	90.6ft ²
___ 2	W		Wood	AC2	Wood	0.46	3.00	0	8.00	0	24.0ft ²
___ 3	S		Insulated	AC2	Metal	0.46	3.00	0	8.00	0	24.0ft ²
___ 4	S		Wood	AC1	Wood	0.46	3.00	0	8.00	0	24.0ft ²
___ 5	W		Wood	AC1	Wood	0.46	3.00	0	8.00	0	24.0ft ²
___ 6	E		Wood	AC1	Wood	0.46	3.00	0	8.00	0	24.0ft ²
___ 7	S		Wood	AC1	Wood	0.46	3.00	0	8.00	0	24.0ft ²
___ 8	E		Insulated	AC1	Metal	0.46	6.00	1	8.00	4	50.7ft ²
___ 9	E		Insulated	AC2	Metal	0.46	6.00	1	8.00	4	50.7ft ²
___ 10	E		Insulated	AC2	Metal	0.46	6.00	1	8.00	4	50.7ft ²
___ 11	E		Wood	AC3	Wood	0.46	3.00	0	8.00	0	24.0ft ²
___ 12	E		Insulated	AC3	Metal	0.46	3.00	0	8.00	4	25.0ft ²
___ 13	SE		Insulated	AC5	Metal	0.46	3.00	0	8.00	4	25.0ft ²
___ 14	SE		Insulated	AC5	Metal	0.46	3.00	0	8.00	4	25.0ft ²
___ 15	SE		Insulated	AC6	Metal	0.46	3.00	0	8.00	4	25.0ft ²
___ 16	E		Insulated	AC6	Metal	0.46	3.00	0	8.00	4	25.0ft ²
___ 17	N		Insulated	AC6	Metal	0.46	3.00	0	8.00	4	25.0ft ²
___ 18	N		Insulated	AC6	Metal	0.46	3.00	0	8.00	4	25.0ft ²
___ 19	W		Insulated	AC6	Metal	0.46	3.00	0	8.00	4	25.0ft ²

WINDOWS

(Total Exposed Area = 3747 sq.ft.)

✓ #	Ornt	Wall ID	Frame	Panes	NFRC	U-Factor	SHGC	Imp	Storm	Total Area (ft ²)	Same Units	Width (ft)	Height (ft)	--Overhang-- Depth (ft)	Sep. (ft)	Interior Shade	Screen
___ 1	W	1	Metal	Low-E Single	Y	0.66	0.32	Y	N	94.3	1	7.75	12.17	12.0	11.0	None	None
___ 2	W	1	Metal	Low-E Single	Y	0.66	0.32	Y	N	139.9	1	11.50	12.17	12.0	11.0	None	None
___ 3	E	14	Metal	Low-E Single	Y	0.66	0.32	Y	N	45.5	1	3.50	13.00	45.4	0.3	None	None
___ 4	E	14	Metal	Low-E Single	Y	0.66	0.32	Y	N	136.5	3	3.50	13.00	45.4	0.3	None	None
___ 5	N	15	Metal	Low-E Single	Y	0.66	0.32	Y	N	131.1	1	10.08	13.00	0.1	0.3	None	None
___ 6	E	16	Metal	Low-E Single	Y	0.66	0.32	Y	N	44.4	1	3.75	11.83	6.6	0.3	None	None
___ 7	E	16	Metal	Low-E Single	Y	0.66	0.32	Y	N	88.8	2	3.75	11.83	6.6	0.3	None	None
___ 8	E	16	Metal	Low-E Single	Y	0.66	0.32	Y	N	177.5	4	3.75	11.83	6.6	0.3	None	None
___ 9	E	17	Metal	Low-E Single	Y	0.66	0.32	Y	N	74.9	2	3.17	11.83	6.6	0.3	None	None
___ 10	S	18	Metal	Low-E Single	Y	0.66	0.32	Y	N	113.4	1	9.58	11.83	4.2	0.3	None	None
___ 11	E	19	Metal	Low-E Single	Y	0.66	0.32	Y	N	78.9	2	3.33	11.83	4.5	0.3	None	None
___ 12	E	19	Metal	Low-E Single	Y	0.66	0.32	Y	N	116.4	1	9.83	11.83	4.5	0.3	None	None
___ 13	N	20	Metal	Low-E Single	Y	0.66	0.32	Y	N	173.6	1	14.67	11.83	2.8	0.3	None	None
___ 14	N	20	Metal	Low-E Single	Y	0.66	0.32	Y	N	236.7	2	10.00	11.83	2.8	0.3	None	None
___ 15	W	23	Metal	Low-E Single	Y	0.66	0.32	Y	N	53.4	1	4.33	12.33	7.8	0.1	None	None
___ 16	W	23	Metal	Low-E Single	Y	0.66	0.32	Y	N	49.7	1	4.08	12.17	7.8	0.1	None	None
___ 17	W	24	Metal	Low-E Single	Y	0.66	0.32	Y	N	121.9	1	11.08	11.00	3.7	1.0	None	None

INPUT SUMMARY CHECKLIST REPORT

WINDOWS(Continued)

___ 18S	25	Metal	Low-E Single	Y	0.66	0.32	Y	N	316.3	1	28.75	11.00	3.7	1.0	None	None
___ 19E	26	Metal	Low-E Single	Y	0.66	0.32	Y	N	121.9	1	11.08	11.00	3.7	1.0	None	None
___ 20N	27	Metal	Low-E Single	Y	0.66	0.32	Y	N	82.5	1	7.50	11.00	4.6	1.0	None	None
___ 21N	31	Metal	Low-E Single	Y	0.66	0.32	Y	N	82.5	1	7.50	11.00	4.6	1.0	None	None
___ 22W	32	Metal	Low-E Single	Y	0.66	0.32	Y	N	186.0	1	18.00	10.33	16.8	0.1	None	None
___ 23SE	39	Metal	Low-E Single	Y	0.66	0.32	Y	N	62.0	1	6.00	10.33	3.0	0.1	None	None
___ 24SE	39	Metal	Low-E Single	Y	0.66	0.32	Y	N	77.5	1	7.50	10.33	3.0	0.1	None	None
___ 25SE	39	Metal	Low-E Single	Y	0.66	0.32	Y	N	291.1	1	28.17	10.33	3.0	0.1	None	None
___ 26SE	40	Metal	Low-E Single	Y	0.66	0.32	Y	N	124.9	1	12.08	10.33	3.0	0.1	None	None
___ 27E	42	Metal	Low-E Single	Y	0.66	0.32	Y	N	67.2	1	6.50	10.33	3.3	0.1	None	None
___ 28N	43	Metal	Low-E Single	Y	0.66	0.32	Y	N	98.2	1	9.50	10.33	3.3	0.1	None	None
___ 29N	43	Metal	Low-E Single	Y	0.66	0.32	Y	N	74.1	1	7.17	10.33	3.3	0.1	None	None
___ 30W	45	Metal	Low-E Single	Y	0.66	0.32	Y	N	47.4	1	4.58	10.33	6.6	0.1	None	None
___ 31W	45	Metal	Low-E Single	Y	0.66	0.32	Y	N	131.8	1	12.75	10.33	8.9	0.1	None	None
___ 32S	11	Metal	Low-E Single	Y	0.66	0.32	Y	N	97.3	1	8.00	12.17	0.1	0.1	None	None
___ 33H	Skylt	Metal	Low-E Single	Y	0.66	0.32	Y	N	9.9	1	4.75	2.08	0.0	0.0	None	None

INFILTRATION

✓ #	Scope	Method	SLA	CFM50	ELA	EqLA	ACH	ACH50	Space(s)	Infiltration Test Volume
___ 1	Wholehouse	Proposed ACH(50)	0.00058	19175	1051.97	1974.96	0.2373	7.0	All	164353 cu ft

GARAGE

✓ #	Floor Area	Roof Area	Exposed Wall Perimeter	Avg. Wall Height	Exposed Wall Insulation
___ 1	816 ft²	816 ft²	109 ft	13 ft	1

MASS

✓ #	Mass Type	Area	Thickness	Furniture Fraction	Space
___ 1	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	AC1
___ 2	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	AC2
___ 3	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	AC3
___ 4	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	AC4
___ 5	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	AC5
___ 6	Default(8 lbs/sq.ft.)	0 ft²	0 ft	0.30	AC6

HEATING SYSTEM

✓ #	System Type	Subtype	AHRI #	Efficiency	Capacity kBtu/hr	---Geothermal HeatPump---				Ducts	Block
						Entry	Power	Volt	Current		
___ 1	Electric Strip Heat	None		COP: 1.00	34.1		0.00	0.00	0.00	sys#1	1
___ 2	Electric Strip Heat	None		COP: 1.00	34.1		0.00	0.00	0.00	sys#2	2
___ 3	Electric Strip Heat	None		COP: 1.00	34.1		0.00	0.00	0.00	sys#3	3
___ 4	Electric Strip Heat	None		COP: 1.00	27.3		0.00	0.00	0.00	sys#4	4
___ 5A	Electric Strip Heat	None		COP: 1.00	34.1		0.00	0.00	0.00	sys#5	5
___ 5B	Electric Strip Heat	None		COP: 1.00	34.1		0.00	0.00	0.00	sys#5	5
___ 5C	Electric Strip Heat	None		COP: 1.00	0.0		0.00	0.00	0.00	sys#5	5
___ 5D	Electric Strip Heat	None		COP: 1.00	0.0		0.00	0.00	0.00	sys#5	5
___ 5E	Electric Strip Heat	None		COP: 1.00	0.0		0.00	0.00	0.00	sys#5	5

INPUT SUMMARY CHECKLIST REPORT

COOLING SYSTEM

✓ #	System Type	Subtype/Speed	AHRI #	Efficiency	Capacity kBtu/hr	Air Flow cfm	SHR	Duct	Block
___ 1	Central Unit	None/Single		SEER2:20.0	57.0	2000	0.75	sys#1	1
___ 2	Central Unit	None/Single		SEER2:20.0	57.0	2000	0.75	sys#2	2
___ 3	Central Unit	None/Single		SEER2:20.0	57.0	2000	0.75	sys#3	3
___ 4	Central Unit	None/Single		SEER2:17.5	35.6	1200	0.75	sys#4	4
___ 5A	Central Unit	None/Single		SEER2:20.0	57.0	2000	0.75	sys#5	5
___ 5B	Central Unit	None/Single		SEER2:20.0	57.0	2000	0.75	sys#5	5

HOT WATER SYSTEM

✓ #	System Type	Subtype	Location	EF(UEF)	Cap	Use	SetPnt	Fixture Flow	Pipe Ins.	Pipe length
___ 1	Electric	None	Exterior	0.86 (0.89)	80.00 gal	50 gal	120 deg	Standard	None	50
	Recirculation System	Recirc Control Type	Loop length	Branch length	Pump power	DWHR	Facilities Connected	Equal Flow	DWHR Eff	Other Credits
___ 1	Yes	Demand control(presence sensor)	125.00	20.00	650.0	No	NA	NA	NA	None

DUCTS

✓ Duct #	Location	Supply----- R-Value Area	Return----- R-Value Area	Leakage Type	Air Handler	CFM 25 TOT	CFM 25 OUT	QN OUT	RLF	HVAC # Heat Cool
___ 1	Attic	6.0 600 ft² Attic	6.0 200 ft²	Default Leakage	AC1	(Default) (Default)				1 1
___ 2	Attic	6.0 100 ft² Attic	6.0 25 ft²	Default Leakage	AC2	(Default) (Default)				2 2
___ 3	Attic	6.0 150 ft² Attic	6.0 150 ft²	Default Leakage	AC3	(Default) (Default)				3 3
___ 4	Attic	6.0 100 ft² Attic	6.0 25 ft²	Default Leakage	AC4	(Default) (Default)				4 4
___ 5	Attic	6.0 650 ft² Attic	6.0 200 ft²	Default Leakage	AC5	(Default) (Default)				5 5

TEMPERATURES

Programable Thermostat: Y				Ceiling Fans: N									
Cooling	[X] Jan	[X] Feb	[X] Mar	[X] Apr	[X] May	[X] Jun	[X] Jul	[X] Aug	[X] Sep	[X] Oct	[X] Nov	[X] Dec	
Heating	[X] Jan	[X] Feb	[X] Mar	[X] Apr	[X] May	[X] Jun	[X] Jul	[X] Aug	[X] Sep	[X] Oct	[X] Nov	[X] Dec	
Venting	[X] Jan	[X] Feb	[X] Mar	[X] Apr	[X] May	[X] Jun	[X] Jul	[X] Aug	[X] Sep	[X] Oct	[X] Nov	[X] Dec	
✓ Thermostat Schedule: HERS 2006 Reference	Hours												
Schedule Type	1	2	3	4	5	6	7	8	9	10	11	12	
___ Cooling (WD)	AM PM	78 80	78 80	78 78	78 78	78 78	78 78	78 78	78 78	80 78	80 78	80 78	80 78
___ Cooling (WEH)	AM PM	78 78	78 78	78 78	78 78	78 78	78 78	78 78	78 78	78 78	78 78	78 78	78 78
___ Heating (WD)	AM PM	66 68	66 68	66 68	66 68	66 68	68 68	68 68	68 68	68 68	68 68	68 66	68 66
___ Heating (WEH)	AM PM	66 68	66 68	66 68	66 68	66 68	68 68	68 68	68 68	68 68	68 68	68 66	68 66

ENERGY PERFORMANCE LEVEL (EPL) DISPLAY CARD

ESTIMATED ENERGY PERFORMANCE INDEX* = 85

The lower the EnergyPerformance Index, the more efficient the home.

11041 SW 77th Ave,Miami,FL,33156

1. New construction or existing	New (From Plans)	10. Wall Types(12899.0 sqft.)	Insulation	Area
2. Single family or multiple family	Detached	a. Concrete Block - Ext Insul, Exterior	R=5.0	12318.00 ft ²
3. Number of units, if multiple family	1	b. Concrete Block - Ext Insul, Adjacent	R=5.0	581.00 ft ²
4. Number of Bedrooms	9	c. N/A		
5. Is this a worst case?	No	d. N/A		
6. Conditioned floor area above grade (ft ²)	12617	11. Ceiling Types(7975.0 sqft.)	Insulation	Area
Conditioned floor area below grade (ft ²)	0	a. Single assembly, with (Unvented)	R=0.0	7975.00 ft ²
7. Windows**	Description	b. N/A		
a. U-Factor:	Sgl, U=0.66	c. N/A		
SHGC:	SHGC=0.32	12. Roof(Concrete, Unvent)	Deck R=30.0	8004 ft ²
b. U-Factor:	N/A	13. Ducts, location & insulation level	R	ft ²
SHGC:		a. Sup: Attic, Ret: Attic, AH: AC1	6	600
c. U-Factor:	N/A	b. Sup: Attic, Ret: Attic, AH: AC2	6	100
SHGC:		c. 3 additional duct system(s)		(see details)
Area Weighted Average Overhang Depth:	7.172 ft	14. Cooling Systems	kBtu/hr	Efficiency
Area Weighted Average SHGC:	0.320	a. Central Unit	57.0	SEER2:20.00
8. Skylights	Description	b. Central Unit	57.0	SEER2:20.00
U-Factor:(AVG)	U=0.66	3 additional cooling systems		(see details)
SHGC(AVG):	SHGC=0.32	15. Heating Systems	kBtu/hr	Efficiency
9. Floor Types	Insulation	a. Electric Strip Heat	34.1	COP:1.00
a. Slab-On-Grade Edge Insulation	R= 0.0	b. Electric Strip Heat	34.1	COP:1.00
b. Floor Over Other Space	R= 11.0	3 additional heating systems		(see details)
c. other (see details)	R=	16. Hot Water Systems		
		a. Electric	Cap: 80 gallons	EF: 0.860
		b. Conservation features		
		Recirc(Demand control(pres. sens.)		
		17. Credits		Pstat

I certify that this home has complied with the Florida Energy Efficiency Code for Building Construction through the above energy saving features which will be installed (or exceeded) in this home before final inspection. Otherwise, a new EPL Display Card will be completed based on installed Code compliant features.

Builder Signature: _____ Date: _____

Address of New Home: 11041 SW 77th Ave

City/FL Zip: Miami,FL,33156



*Note: This is not a Building Energy Rating. If your Index is below 70, your home may qualify for energy efficient mortgage (EEM) incentives if you obtain a Florida Energy Rating. For information about the Florida Building Code, Energy Conservation, contact the Florida Building Commission's support staff.

**Label required by Section R303.1.3 of the Florida Building Code, Energy Conservation, if not DEFAULT.

Florida Building Code, Energy Conservation, 8th Edition (2023)

Mandatory Requirements for Residential Performance, Prescriptive and ERI Methods

ADDRESS: 11041 SW 77th Ave
Miami, FL 33156

Permit Number:

MANDATORY REQUIREMENTS - See individual code sections for full details.

SECTION R401 GENERAL

-  **R401.3 Energy Performance Level (EPL) display card - (Mandatory).** The building official shall require that an energy performance level (EPL) display card be completed and certified by the builder to be accurate and correct before final approval of the building for occupancy. Florida law (Section 553.9085, Florida Statutes) requires the EPL display card to be included as an addendum to each sales contract for both presold and nonpresold residential buildings. The EPL display card contains information indicating the energy performance level and efficiencies of components installed in a dwelling unit. The building official shall verify that the EPL display card completed and signed by the builder accurately reflects the plans and specifications submitted to demonstrate code compliance for the building. A copy of the EPL display card can be found in Appendix RD.

SECTION R402 BUILDING THERMAL ENVELOPE

- ☐ **R402.2.10.1 Slab-on-grade floor insulation installation (Mandatory).** Where installed, the insulation shall extend downward from the top of the slab on the outside or inside of the foundation wall. Insulation located below grade shall be extended the distance provided in Table R402.1.2, or the distance of the proposed design as applicable, by any combination of vertical insulation, insulation extending under the slab or insulation extending out from the building. Insulation extending away from the building shall be protected by pavement or by not less than 10 inches (254 mm) of soil. The top edge of the insulation installed between the exterior wall and the edge of the interior slab shall be permitted to be cut at a 45-degree (0.79 rad) angle away from the exterior wall.
- ☐ **R402.2.11.1 Crawl space walls insulation installation (Mandatory).** Where crawl space wall insulation is installed, it shall be permanently fastened to the wall and extend downward from the floor to the finished grade level and then vertically and/or horizontally for at least an additional 24 inches (610 mm). Exposed earth in unvented crawl space foundations shall be covered with a continuous Class I vapor retarder in accordance with the Florida Building Code, Building, or Florida Building Code, Residential, as applicable. All joints of the vapor retarder shall overlap by 6 inches (153 mm) and be sealed or taped. The edges of the vapor retarder shall extend not less than 6 inches (153 mm) up the stem wall and shall be attached to the stem wall.
-  **R402.4 Air leakage (Mandatory).** The building thermal envelope shall be constructed to limit air leakage in accordance with the requirements of Sections R402.4.1 through R402.4.5.
- Exception:** Dwelling units of R-2 Occupancies and multiple attached single family dwellings shall be permitted to comply with Section C402.5.
-  **R402.4.1 Building thermal envelope.** The building thermal envelope shall comply with Sections R402.4.1.1 and R402.4.1.2. The sealing methods between dissimilar materials shall allow for differential expansion and contraction.
-  **R402.4.1.1 Installation.** The components of the building thermal envelope as listed in Table R402.4.1.1 shall be installed in accordance with the manufacturer's instructions and the criteria listed in Table R402.4.1.1, as applicable to the method of construction. Where required by the code official, an approved third party shall inspect all components and verify compliance.
-  **R402.4.1.2 Testing.** The building or dwelling unit shall be tested and verified as having an air leakage rate not exceeding seven air changes per hour in Climate Zones 1 and 2, and three air changes per hour in Climate Zones 3 through 8. Dwelling units with an air leakage rate less than three air changes per hour shall be provided with whole-house mechanical ventilation in accordance with Section R403.6.1 of this code and Section M1507.3 of the Florida Building Code, Residential. Testing shall be conducted in accordance with ANSI/RESNET/ICC 380 and reported at a pressure of 0.2 inch w.g. (50 pascals). Testing shall be conducted by either individuals as defined in Section 553.993(5) or (7), Florida Statutes, or individuals licensed as set forth in Section 489.105(3)(f), (g) or (i) or an approved third party. A written report of the results of the test shall be signed by the party conducting the test and provided to the code official. Testing shall be performed at any time after creation of all penetrations of the building thermal envelope.
- Exception:** Testing is not required for additions, alterations, renovations, or repairs, of the building thermal envelope of existing buildings in which the new construction is less than 85 percent of the building thermal envelope.

During testing:

1. Exterior windows and doors, fireplace and stove doors shall be closed, but not sealed, beyond the intended weatherstripping or other infiltration control measures.
2. Dampers including exhaust, intake, makeup air, backdraft and flue dampers shall be closed, but not sealed beyond intended infiltration control measures.
3. Interior doors, if installed at the time of the test, shall be open.
4. Exterior doors for continuous ventilation systems and heat recovery ventilators shall be closed and sealed.
5. Heating and cooling systems, if installed at the time of the test, shall be turned off.
6. Supply and return registers, if installed at the time of the test, shall be fully open.
7. If an attic is both air sealed and insulated at the roof deck, interior access doors and hatches between the conditioned space volume and the attic shall be opened during the test and the volume of the attic shall be added to the conditioned space volume for purposes of reporting an infiltration volume and calculating the air leakage of the home.

Florida Building Code, Energy Conservation, Mandatory Requirements (2023 Continued)

- ☐ **R402.4.2 Fireplaces.** New wood-burning fireplaces shall have tight-fitting flue dampers or doors, and outdoor combustion air. Where using tight-fitting doors on factory-built fireplaces listed and labeled in accordance with UL 127, the doors shall be tested and listed for the fireplace. Where using tight-fitting doors on masonry fireplaces, the doors shall be listed and labeled in accordance with UL 907.
- ☒ **R402.4.3 Fenestration air leakage.** Windows, skylights and sliding glass doors shall have an air infiltration rate of no more than 0.3 cfm per square foot (1.5 L/s/m²), and swinging doors no more than 0.5 cfm per square foot (2.6 L/s/m²), when tested according to NFRC 400 or AAMA/WDMA/CSA 101/I.S.2/A440 by an accredited, independent laboratory and listed and labeled by the manufacturer.
- Exception:** Site-built windows, skylights and doors.
- ☐ **R402.4.4 Rooms containing fuel - burning appliances.** In Climate Zones 3 through 8, where open combustion air ducts provide combustion air to open combustion fuel burning appliances, the appliances and combustion air opening shall be located outside the building thermal envelope or enclosed in a room, isolated from inside the thermal envelope. Such rooms shall be sealed and insulated in accordance with the envelope requirements of Table R402.1.2, where the walls, floors and ceilings shall meet not less than the basement wall R-value requirement. The door into the room shall be fully gasketed and any water lines and ducts in the room insulated in accordance with Section R403. The combustion air duct shall be insulated where it passes through conditioned space to a minimum of R-8.
- Exceptions:**
1. Direct vent appliances with both intake and exhaust pipes installed continuous to the outside.
 2. Fireplaces and stoves complying with Section R402.4.2 and Section R1006 of the Florida Building Code, Residential.
- ☒ **R402.4.5 Recessed lighting.** Recessed luminaires installed in the building thermal envelope shall be sealed to limit air leakage between conditioned and unconditioned spaces. All recessed luminaires shall be IC-rated and labeled as having an air leakage rate not more than 2.0 cfm (0.944 L/s) when tested in accordance with ASTM E283 at a 1.57 psf (75 Pa) pressure differential. All recessed luminaires shall be sealed with a gasket or caulk between the housing and the interior wall or ceiling covering.
- ☐ **R402.4.6 Air-sealed electrical and communication boxes.** Air-sealed electrical and communication boxes that penetrate the air barrier of the building thermal envelope shall be caulked, taped, gasketed, or otherwise sealed to the air barrier element being penetrated. Air-sealed boxes shall be buried in or surrounded by insulation. Air-sealed boxes shall be marked in accordance with NEMA OS 4. Air-sealed boxes shall be installed in accordance with the manufacturer's instructions.

SECTION R403 SYSTEMS

- ☒ **R403.1 Controls**
- ☐ **R403.1.1 Thermostat provision (Mandatory).** At least one thermostat shall be provided for each separate heating and cooling system
- ☐ **R403.1.3 Heat pump supplementary heat (Mandatory).** Heat pumps with supplementary electric-resistance heaters shall have controls that limit supplemental heat operation to only those times when one of the following applies:
1. The vapor compression cycle cannot provide the necessary heating energy to satisfy the thermostat setting.
 2. The heat pump is operating in defrost mode.
 3. The vapor compression cycle malfunctions.
 4. The thermostat malfunctions
- ☒ **R403.3.2 Sealing (Mandatory).** All ducts, air handlers, filter boxes and building cavities that form the primary air containment passageways for air distribution systems shall be considered ducts or plenum chambers, shall be constructed and sealed in accordance with Section C403.2.9.2 of the Commercial Provisions of this code and shall be shown to meet duct tightness criteria below.
- Duct tightness shall be verified by testing in accordance with ANSI/RESNET/ICC 380 by either individuals as defined in Section 553.993(5) or (7), Florida Statutes, or individuals licensed as set forth in Section 489.105(3)(f), (g) or (i), Florida Statutes, to be "substantially leak free" in accordance with Section R403.3.3.
- ☒ **R403.3.2.1 Sealed air handler.** Air handlers shall have a manufacturer's designation for an air leakage of no more than 2 percent of the design airflow rate when tested in accordance with ASHRAE 193.
- ☒ **R403.3.3 Duct testing (Mandatory).** Ducts shall be pressure tested to determine air leakage by one of the following methods:
1. Rough-in test: Total leakage shall be measured with a pressure differential of 0.1 inch w.g. (25 Pa) across the system, including the manufacturer's air handler enclosure if installed at the time of the test. All registers shall be taped or otherwise sealed during the test.
 2. Postconstruction test: Total leakage shall be measured with a pressure differential of 0.1 inch w.g. (25 Pa) across the entire system, including the manufacturer's air handler enclosure. Registers shall be taped or otherwise sealed during the test.
- Exceptions;**
1. A duct air leakage test shall not be required where the ducts and air handlers are located entirely within the building thermal envelope.
 2. Duct testing is not mandatory for buildings complying by Section 405 of this code. Duct leakage testing is required for Section R405 compliance where credit is taken for leakage, and a duct air leakage Q_n to the outside of less than 0.080 (where Q_n = duct leakage to the outside in cfm per 100 square feet of conditioned floor area tested at 25 Pascals) is indicated in the compliance report for the proposed design.
- A written report of the results of the test shall be signed by the party conducting the test and provided to the code official

Florida Building Code, Energy Conservation, Mandatory Requirements (2023 Continued)

- ☒ **R403.3.5 Building cavities (Mandatory).** Building framing cavities shall not be used as ducts or plenums
- ☒ **R403.4 Mechanical system piping insulation (Mandatory).** Mechanical system piping capable of carrying fluids above 105°F (41°C) or below 55°F (13°C) shall be insulated to a minimum of R-3.
- ☒ **R403.4.1 Protection of piping insulation.** Piping insulation exposed to weather shall be protected from damage, including that caused by sunlight, moisture, equipment maintenance and wind, and shall provide shielding from solar radiation that can cause degradation of the material. Adhesive tape shall not be permitted.
- ☒ **R403.5.1 Heated water circulation and temperature maintenance systems (Mandatory).** If heated water circulation systems are installed, they shall be in accordance with Section R403.5.1.1. Heat trace temperature maintenance systems shall be in accordance with Section R403.5.1.2. Automatic controls, temperature sensors and pumps shall be accessible. Manual controls shall be readily accessible.
- ☒ **R403.5.1.1 Circulation systems.** Heated water circulation systems shall be provided with a circulation pump. The system return pipe shall be a dedicated return pipe or a cold water supply pipe. Gravity and thermosiphon circulation systems shall be prohibited. Controls for circulating hot water system pumps shall start the pump based on the identification of a demand for hot water within the occupancy. The controls shall automatically turn off the pump when the water in the circulation loop is at the desired temperature and when there is no demand for hot water.
- ☒ **R403.5.1.2 Heat trace systems.** Electric heat trace systems shall comply with IEEE 515.1 or UL 515. Controls for such systems shall automatically adjust the energy input to the heat tracing to maintain the desired water temperature in the piping in accordance with the times when heated water is used in the occupancy.
- ☐ **R403.5.2 Demand recirculation water systems (Mandatory).** Where installed, demand recirculation water systems shall have controls that comply with both of the following:
1. The control shall start the pump upon receiving a signal from the action of a user of a fixture or appliance, sensing the presence of a user of a fixture or sensing the flow of hot or tempered water to a fixture fitting or appliance.
 2. The control shall limit the temperature of the water entering the cold water piping to 104°F (40°C).
- ☒ **R403.5.5 Heat traps (Mandatory).** Storage water heaters not equipped with integral heat traps and having vertical pipe risers shall have heat traps installed on both the inlets and outlets. External heat traps shall consist of either a commercially available heat trap or a downward and upward bend of at least 3 ½ inches (89 mm) in the hot water distribution line and cold water line located as close as possible to the storage tank.
- ☒ **R403.5.6 Water heater efficiencies (Mandatory).**
- ☒ **R403.5.6.1.1 Automatic controls.** Service water-heating systems shall be equipped with automatic temperature controls capable of adjustment from the lowest to the highest acceptable temperature settings for the intended use. The minimum temperature setting range shall be from 100°F to 140°F (38°C to 60°C).
- ☒ **R403.5.6.1.2 Shut down.** A separate switch or a clearly marked circuit breaker shall be provided to permit the power supplied to electric service systems to be turned off. A separate valve shall be provided to permit the energy supplied to the main burner(s) of combustion types of service water-heating systems to be turned off.
- ☒ **R403.5.6.2 Water-heating equipment.** Water-heating equipment installed in residential units shall meet the minimum efficiencies of Table C404.2 in Chapter 4 of the Florida Building Code, Energy Conservation, Commercial Provisions, for the type of equipment installed. Equipment used to provide heating functions as part of a combination system shall satisfy all stated requirements for the appropriate water-heating category. Solar water heaters shall meet the criteria of Section R403.5.6.2.1.
- ☐ **R403.5.6.2.1 Solar water-heating systems.** Solar systems for domestic hot water production are rated by the annual solar energy factor of the system. The solar energy factor of a system shall be determined from the Florida Solar Energy Center Directory of Certified Solar Systems. Solar collectors shall be tested in accordance with ISO Standard 9806, Test Methods for Solar Collectors, and SRCC Standard TM-1, Solar Domestic Hot Water System and Component Test Protocol. Collectors in installed solar water-heating systems should meet the following criteria:
1. Be installed with a tilt angle between 10 degrees and 40 degrees of the horizontal; and
 2. Be installed at an orientation within 45 degrees of true south.
- ☒ **R403.6 Mechanical ventilation (Mandatory).** The building shall be provided with ventilation that meets the requirements of the Florida Building Code, Residential, or Florida Building Code, Mechanical, as applicable, or with other approved means of ventilation including: Natural, Infiltration or Mechanical means. Outdoor air intakes and exhausts shall have automatic or gravity dampers that close when the ventilation system is not operating.



R403.6.1 Whole-house mechanical ventilation system fan efficacy. When installed to function as a whole-house mechanical ventilation system, fans shall meet the efficacy requirements of Table R403.6.1.

Exception: Where an air handler that is integral to tested and listed HVAC equipment is used to provide whole-house mechanical ventilation, the air handler shall be powered by an electronically commutated motor.

**TABLE R403.6.1
WHOLE-HOUSE MECHANICAL VENTILATION SYSTEM FAN EFFICACY**

FAN LOCATION	AIRFLOW RATE MINIMUM (CFM)	MINIMUM EFFICACY ^a (CFM/WATT)	AIRFLOW RATE MAXIMUM (CFM)
HRV or ERV	Any	1.2 cfm/watt	Any
Range hoods	Any	2.8 cfm/watt	Any
In-line fan	Any	3.8 cfm/watt	Any
Bathroom, utility room	10	2.8 cfm/watt	<90
Bathroom, utility room	90	3.5 cfm/watt	Any

For SI: 1 cfm = 28.3 L/min.

a. When tested in accordance with HVI Standard 916



R403.6.2 Ventilation Air. Residential buildings designed to be operated at a positive indoor pressure or for mechanical ventilation shall meet the following criteria:

1. The design air change per hour minimums for residential buildings in ASHRAE 62.2, Ventilation for Acceptable Indoor Air Quality, shall be the maximum rates allowed for residential applications.
2. No ventilation or air-conditioning system make-up air shall be provided to conditioned space from attics, crawlspaces, attached enclosed garages or outdoor spaces adjacent to swimming pools or spas.
3. If ventilation air is drawn from enclosed space(s), then the walls of the space(s) from which air is drawn shall be insulated to a minimum of R-11 and the ceiling shall be insulated to a minimum of R-19, space permitting, or R-10 otherwise.

R403.7 Heating and cooling equipment.



R403.7.1 Equipment sizing (Mandatory). Heating and cooling equipment shall be sized in accordance with ACCA Manual S based on the equipment loads calculated in accordance with ACCA Manual J or other approved heating and cooling calculation methodologies, based on building loads for the directional orientation of the building. The manufacturer and model number of the outdoor and indoor units (if split system) shall be submitted along with the sensible and total cooling capacities at the design conditions described in Section R302.1. This Code does not allow designer safety factors, provisions for future expansion or other factors that affect equipment sizing. System sizing calculations shall not include loads created by local intermittent mechanical ventilation such as standard kitchen and bathroom exhaust systems. New or replacement heating and cooling equipment shall have an efficiency rating equal to or greater than the minimum required by federal law for the geographic location where the equipment is installed.

Florida Building Code, Energy Conservation, Mandatory Requirements (2023 Continued)

- ☒ **R403.7.1.1 Cooling equipment capacity.** Cooling only equipment shall be selected so that its total capacity is not less than the calculated total load but not more than 1.15 times greater than the total load calculated according to the procedure selected in Section R403.7, or the closest available size provided by the manufacturer's product lines. The corresponding latent capacity of the equipment shall not be less than the calculated latent load.
- The published value for AHRI total capacity is a nominal, rating-test value and shall not be used for equipment sizing. Manufacturer's expanded performance data shall be used to select cooling-only equipment. This selection shall be based on the outdoor design dry-bulb temperature for the load calculation (or entering water temperature for water-source equipment), the blower CFM provided by the expanded performance data, the design value for entering wet-bulb temperature and the design value for entering dry-bulb temperature.

Design values for entering wet-bulb and dry-bulb temperatures shall be for the indoor dry bulb and relative humidity used for the load calculation and shall be adjusted for return side gains if the return duct(s) is installed in an unconditioned space.

Exceptions:

1. Attached single- and multiple-family residential equipment sizing may be selected so that its cooling capacity is less than the calculated total sensible load but not less than 80 percent of that load.
2. When signed and sealed by a Florida-registered engineer, in attached single- and multiple-family units, the capacity of equipment may be sized in accordance with good design practice.

R403.7.1.2 Heating equipment capacity.

- ☐ **R403.7.1.2.1 Heat pumps.** Heat pump sizing shall be based on the cooling requirements as calculated according to Section R403.7.1.1, and the heat pump total cooling capacity shall not be more than 1.15 times greater than the design cooling load even if the design heating load is 1.15 times greater than the design cooling load.
- ☒ **R403.7.1.2.2 Electric resistance furnaces.** Electric resistance furnaces shall be sized within 4 kW of the design requirements calculated according to the procedure selected in Section R403.7.1.
- ☐ **R403.7.1.2.3 Fossil fuel heating equipment.** The capacity of fossil fuel heating equipment with natural draft atmospheric burners shall not be less than the design load calculated in accordance with Section R403.7.1.
- ☐ **R403.7.1.3 Extra capacity required for special occasions.** Residences requiring excess cooling or heating equipment capacity on an intermittent basis, such as anticipated additional loads caused by major entertainment events, shall have equipment sized or controlled to prevent continuous space cooling or heating within that space by one or more of the following options:
1. A separate cooling or heating system is utilized to provide cooling or heating to the major entertainment areas.
 2. A variable capacity system sized for optimum performance during base load periods is utilized.
- ☐ **R403.8 Systems serving multiple dwelling units (Mandatory).** Systems serving multiple dwelling units shall comply with Sections C403 and C404 of the Florida Building Code, Energy Conservation—Commercial Provisions in lieu of Section R403.
- ☐ **R403.9 Snow melt and ice system controls (Mandatory).** Snow- and ice-melting systems, supplied through energy service to the building, shall include automatic controls capable of shutting off the system when the pavement temperature is above 50°F (10°C), and no precipitation is falling and an automatic or manual control that will allow shutoff when the outdoor temperature is above 40°F (4.8°C).
- ☐ **403.10 Pools and permanent spa energy consumption (Mandatory).** The energy consumption of pools and permanent spas shall be in accordance with Sections R403.10.1 through R403.10.5.
- ☐ **R403.10.1 Heaters.** The electric power to heaters shall be controlled by a readily accessible on-off switch that is an integral part of the heater mounted on the exterior of the heater, or external to and within 3 feet (914 mm) of the heater. Operation of such switch shall not change the setting of the heater thermostat. Such switches shall be in addition to a circuit breaker for the power to the heater.
- Gas-fired heaters shall not be equipped with continuously burning ignition pilots.
- ☐ **R403.10.2 Time switches.** Time switches or other control methods that can automatically turn off and on according to a preset schedule shall be installed for heaters and pump motors. Heaters and pump motors that have built-in time switches shall be in compliance with this section.
- Exceptions:**
1. Where public health standards require 24-hour pump operation.
 2. Pumps that operate solar- and waste-heat-recovery pool heating systems
 3. Where pumps are powered exclusively from on-site renewable generation.

Florida Building Code, Energy Conservation, Mandatory Requirements (2023 Continued)

- ☐ **R403.10.3 Covers.** Outdoor heated swimming pools and outdoor permanent spas shall be equipped with a vapor-retardant cover on or at the water surface or a liquid cover or other means proven to reduce heat loss.
- Exception:** Where more than 70 percent of the energy for heating, computed over an operation season, is from site-recovered energy, such as from a heat pump or solar energy source, covers or other vapor-retardant means shall not be required.
- ☐ **R403.10.4 Gas- and oil-fired pool and spa heaters.** All gas- and oil-fired pool and spa heaters shall have a minimum thermal efficiency of 82 percent for heaters manufactured on or after April 16, 2013, when tested in accordance with ANSI Z 21.56. Pool heaters fired by natural or LP gas shall not have continuously burning pilot lights.
- ☐ **R403.10.5 Heat pump pool heaters.** Heat pump pool heaters shall have a minimum COP of 4.0 when tested in accordance with AHRI 1160, Table 2, Standard Rating Conditions-Low Air Temperature. A test report from an independent laboratory is required to verify procedure compliance. Geothermal swimming pool heat pumps are not required to meet this standard.
- ☐ **R403.11 Portable spas (Mandatory).** The energy consumption of electric-powered portable spas shall be controlled by the requirements of APSP-14.
- ☐ **R403.13 Dehumidifiers (Mandatory).** If installed, a dehumidifier shall conform to the following requirements:
1. The minimum rated efficiency of the dehumidifier shall be greater than 1.7 liters/ kWh if the total dehumidifier capacity for the house is less than 75 pints/day and greater than 2.38 liters/kWh if the total dehumidifier capacity for the house is greater than or equal to 75 pints/day.
 2. The dehumidifier shall be controlled by a sensor that is installed in a location where it is exposed to mixed house air.
 3. Any dehumidifier unit located in unconditioned space that treats air from conditioned space shall be insulated to a minimum of R-2.
 4. Condensate disposal shall be in accordance with Section M1411.3.1 of the Florida Building Code, Residential.
- ☐ **R403.13.1 Ducted dehumidifiers.** Ducted dehumidifiers shall, in addition to conforming to the requirements of Section R403.13, conform to the following requirements:
1. If a ducted dehumidifier is configured with return and supply ducts both connected into the supply side of the cooling system, a backdraft damper shall be installed in the supply air duct between the dehumidifier inlet and outlet duct.
 2. If a ducted dehumidifier is configured with only its supply duct connected into the supply side of the central heating and cooling system, a backdraft damper shall be installed in the dehumidifier supply duct between the dehumidifier and central supply duct.
 3. A ducted dehumidifier shall not be ducted to or from a central ducted cooling system on the return duct side upstream from the central cooling evaporator coil.
 4. Ductwork associated with a dehumidifier located in unconditioned space shall be insulated to a minimum of R-6.

SECTION R404 ELECTRICAL POWER AND LIGHTING SYSTEMS

- ☒ **R404.1 Lighting equipment (Mandatory).** All permanently installed luminaires, excluding those in kitchen appliances, shall have an efficacy of at least 45 lumens-per-watt or shall utilize lamps with an efficacy of not less than 65 lumens-per-watt.

R404.1.1 Lighting equipment (Mandatory). Fuel gas lighting systems shall not have continuously burning pilot lights.

SECTION R405 SIMULATED PERFORMANCE ALTERNATIVE (PERFORMANCE)

- ☐ **R405.2 Mandatory requirements.** Compliance with this section requires that the mandatory provisions identified in Section R401.2 be met. All supply and return ducts not completely inside the building thermal envelope shall be insulated to a minimum of R-6, except site-wrapped supply ducts not completely inside the building thermal envelope shall be insulated to a minimum of R-8.
- ☐ **R405.2.1 Ceiling insulation.** Ceilings shall have an insulation level of at least R-19, space permitting. For the purposes of this code, types of ceiling construction that are considered to have inadequate space to install R-19 include single assembly ceilings of the exposed deck and beam type and concrete deck roofs. Such ceiling assemblies shall be insulated to at least a level of R-10.
- ☐ **R405.2.2 Building air leakage testing.** Building or dwelling air leakage testing shall be in accordance with Sections R402.4 through R402.4.1.2. If an air leakage rate below seven air changes per hour at a pressure of 0.2 inch w.g. (50 pascals) is specified for the proposed design, testing shall verify the air leakage rate does not exceed the air leakage rate of the proposed design instead of seven air changes per hour.
- ☐ **R405.2.3 Duct air leakage testing.** In cases where duct air leakage lower than the default Q_n to outside of 0.080 (where Q_n = duct leakage to the outside in cfm per 100 square feet of conditioned floor area tested at 25 Pascals) is specified for the proposed design, testing in accordance with Section R403.3.2 shall verify a duct air leakage rate not exceeding the leakage rate of the proposed design. Otherwise, in accordance with Section R403.3.3, duct testing is not mandatory for buildings complying by Section R405.

SECTION R406 ENERGY RATING INDEX COMPLIANCE ALTERNATIVE

- ☐ **R406.2 Mandatory requirements.** Compliance with this section requires that the provisions identified in Sections R401 through R404 labeled as “mandatory” and Section R403.5.3 of the 2015 International Energy Conservation Code be met. For buildings that do not utilize on-site renewable power production for compliance with this section, the building thermal envelope shall be greater than or equal to levels of efficiency and Solar Heat Gain Coefficient in Table 402.1.1 or 402.1.3 of the 2009 International Energy Conservation Code. For buildings that utilize on-site renewable power production for compliance with this section, the building thermal envelope shall be greater than or equal to levels of efficiency and Solar Heat Gain Coefficient in Table R402.1.2 or Table R402.1.4 of the 2015 International Energy Conservation Code.

Exception: Supply and return ducts not completely inside the building thermal envelope shall be insulated to a minimum of R-6.
- ☐ **R406.2.1 Site-wrapped supply ducts.** Site-wrapped supply ducts not completely inside the building thermal envelope shall be insulated to a minimum of R-8.

2023 - AIR BARRIER AND INSULATION INSPECTION COMPONENT CRITERIA-TABLE 402.4.1.1^a

Project Name: New residence @ 11041 SW 77th Ave		Builder Name:	
Street: 11041 SW 77th Ave		Permit Office:	
City, State, Zip: Miami, FL, 33156		Permit Number:	
Owner:		Jurisdiction: 231000	
Design Location: FL, Miami		County: Miami-Dade(Florida Climate Zone 1)	
COMPONENT	AIR BARRIER CRITERIA	INSULATION INSTALLATION CRITERIA	OK
General requirements	A continuous air barrier shall be installed in the building envelope. The exterior thermal envelope contains a continuous air barrier. Breaks or joints in the air barrier shall be sealed.	Air-permeable insulation shall not be used as a sealing material.	N/A
Ceiling/attic	The air barrier in any dropped ceiling/soffit shall be aligned with the insulation and any gaps in the air barrier shall be sealed. Access openings, drop down stairs or knee wall doors to unconditioned attic spaces shall be sealed.	The insulation in any dropped ceiling/soffit shall be aligned with the air barrier.	N/A
Walls	The junction of the foundation and sill plate shall be sealed. The junction of the top plate and the top of exterior walls shall be sealed. Knee walls shall be sealed.	Cavities within corners and headers of frame walls shall be insulated by completely filling the cavity with a material having a thermal resistance of R-3 per inch minimum. Exterior thermal envelope insulation for framed walls shall be installed in substantial contact and continuous alignment with the air barrier.	N/A
Windows, skylights and doors	The space between window/door jambs and framing, and skylights and framing shall be sealed.		N/A
Rim joists	Rim joists shall include the air barrier.	Rim joists shall be insulated.	N/A
Floors (including above-garage and cantilevered floors)	The air barrier shall be installed at any exposed edge of insulation.	Floor framing cavity insulation shall be installed to maintain permanent contact with the underside of subfloor decking, or floor framing cavity insulation shall be permitted to be in contact with the top side of sheathing, or continuous insulation installed on the underside of floor framing and extends from the bottom to the top of all perimeter floor framing members.	N/A
Crawl space walls	Exposed earth in unvented crawl spaces shall be covered with a Class I vapor retarder with overlapping joints taped.	Where provided instead of floor insulation, insulation shall be permanently attached to the crawlspace walls.	N/A
Shafts, penetrations	Duct shafts, utility penetrations, and flue shafts opening to exterior or unconditioned space shall be sealed.		N/A
Narrow cavities		Batts in narrow cavities shall be cut to fit, or narrow cavities shall be filled by insulation that on installation readily conforms to the available cavity spaces.	N/A
Garage separation	Air sealing shall be provided between the garage and conditioned spaces.		N/A
Recessed lighting	Recessed light fixtures installed in the building thermal envelope shall be sealed to the finished surface.	Recessed light fixtures installed in the building thermal envelope shall be air tight and IC rated.	✓
Plumbing and wiring		Batt insulation shall be cut neatly to fit around wiring and plumbing in exterior walls, or insulation that on installation readily conforms to available space shall extend behind piping and wiring.	✓
Shower/tub on exterior wall	The air barrier installed at exterior walls adjacent to showers and tubs shall separate them from the showers and tubs.	Exterior walls adjacent to showers and tubs shall be insulated.	✓
Electrical, communication, and other equipment boxes, housings, and enclosures	Boxes, housings, and enclosures that penetrate the air barrier shall be caulked, taped, gasketed, or otherwise sealed to the air barrier element being penetrated. All concealed openings into the box, housing, or enclosure shall be sealed. The continuity of the air barrier shall be maintained around boxes, housings, and enclosures that penetrate the air barrier. Alternatively, air-sealed boxes shall be installed in accordance with R402.4.6	Boxes, housings, and enclosures shall be buried in or surrounded by tightly fitted insulation.	✓
HVAC register boots	HVAC supply and return register boots that penetrate building thermal envelope shall be sealed to the sub-floor, wall covering or ceiling penetrated by the boot.		✓
Concealed sprinklers	When required to be sealed, concealed fire sprinklers shall only be sealed in a manner that is recommended by the manufacturer. Caulking or other adhesive sealants shall not be used to fill voids between fire sprinkler cover plates and walls or ceilings.		N/A

a. In addition, inspection of log walls shall be in accordance with the provisions of ICC-400.

Envelope Leakage Test Report (Blower Door Test)
Residential Prescriptive, Performance or ERI Method Compliance
2023 Florida Building Code, Energy Conservation, 8th Edition

Jurisdiction: 231000	Permit #:
Job Information	
Builder: Community: Lot: NA	
Address: 11041 SW 77th Ave	
City: Miami State: FL Zip: 33156	
Air Leakage Test Results <i>Passing results must meet either the Performance, Prescriptive, or ERI Method</i>	
☐ PRESCRIPTIVE METHOD-The building or dwelling unit shall be tested and verified as having an air leakage rate of not exceeding 7 air changes per hour at a pressure of 0.2 inch w.g. (50 Pascals) in Climate Zones 1 and 2. ☒ PERFORMANCE or ERI METHOD-The building or dwelling unit shall be tested and verified as having an air leakage rate of not exceeding the selected ACH(50) value, as shown on Form R405-2023 (Performance) or R406-2023 (ERI), section labeled as infiltration, sub-section ACH50. ACH(50) specified on Form R405-2023-Energy Calc (Performance) or R406-2023 (ERI): 7.000	
$\frac{\text{CFM}(50)}{\text{Building Volume}} \times 60 \div \frac{164353}{\text{ACH}(50)} =$ PASS ☐ When ACH(50) is less than 3, Mechanical Ventilation installation must be verified by building department. Method for calculating building volume: ☐ Retrieved from architectural plans ☒ Code software calculated ☐ Field measured and calculated	
R402.4.1.2 Testing. The building or dwelling unit shall be tested and verified as having an air leakage rate not exceeding seven air changes per hour in Climate Zones 1 and 2, and three air changes per hour in Climate Zones 3 through 8. Dwelling units with an air leakage rate less than three air changes per hour shall be provided with whole-house mechanical ventilation in accordance with Section R403.6.1 of this code and Section M1507.3 if the <i>Florida Building Code, Residential</i>. Testing shall be conducted in accordance with ANSI/RESNET/ICC 380 and reported at a pressure of 0.2 inch w.g. (50 Pascals). Testing shall be conducted by either individuals as defined in Section 553.993(5) or (7), <i>Florida Statutes</i>, or individuals licensed as set forth in Section 489.105(3)(f), (g), or (i) or an approved third party. A written report of the results of the test shall be signed by the party conducting the test and provided to the <i>code official</i>. Testing shall be performed at any time after creation of all penetrations of the <i>building thermal envelope</i>. During testing: 1. Exterior windows and doors, fireplace and stove doors shall be closed, but not sealed, beyond the intended weatherstripping or other infiltration control measures. 2. Dampers including exhaust, intake, makeup air, back draft and flue dampers shall be closed, but not sealed beyond intended infiltration control measures. 3. Interior doors, if installed at the time of the test, shall be open. 4. Exterior doors for continuous ventilation systems and heat recovery ventilators shall be closed and sealed. 5. Heating and cooling systems, if installed at the time of the test, shall be turned off. 6. Supply and return registers, if installed at the time of the test, shall be fully open. 7. If an attic is both sealed and insulated at the roof deck, interior access doors and hatches between the conditioned space volume and the attic shall be opened during the test and the volume of the attic shall be added to the conditioned space volume for purposes of reporting the infiltration volume and calculating the air leakage of the home.	
Testing Company	
Company Name: _____ Phone: _____ I hereby verify that the above Air Leakage results are in accordance with the 2023 8th Edition Florida Building Code Energy Conservation requirements according to the compliance method selected above. Signature of Tester: _____ Date of Test: _____ Printed Name of Tester: _____ License/Certification #: _____ Issuing Authority: _____	

System Sizing Calculations - Summer

Residential Load - Room by Room Component Details

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

6/11/2024

Reference City: Miami, FL (Defaults)
Humidity difference: 56gr.

Temperature Difference: 17.0F(TMY3 99%)
Summer Setpoint: 75 °F (Required Manual J default)

Component Loads for Room #1: AC1

Window	Type*					Overhang		Window Area(sqft)			HTM		Load		
	Panes	SHGC	U	InSh	IS Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded			
3	1 NFRC	0.32, 0.66	No	No	E	45.4f	0.3ft	45.5	45.5	0.0	18	42	826	Btuh	
4	1 NFRC	0.32, 0.66	No	No	E	45.4f	0.3ft	136.5	136.5	0.0	18	42	2479	Btuh	
5	1 NFRC	0.32, 0.66	No	No	N	0.1ft	0.3ft	131.1	0.0	131.1	18	18	2380	Btuh	
32	1 NFRC	0.32, 0.66	No	No	S	0.1ft	0.1ft	97.3	0.0	97.3	18	19	1864	Btuh	
Window Total								410 (sqft)					7549 Btuh		
Walls	Type	U-Value					R-Value		Area(sqft)		HTM		Load		
						Cav/Sheath									
10	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		141.7		2.5		354	Btuh
11	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		459.7		2.5		1149	Btuh
12	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		144.0		2.5		360	Btuh
13	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		608.3		2.5		1521	Btuh
14	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		132.5		2.5		331	Btuh
15	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		236.4		2.5		591	Btuh
Wall Total								1723 (sqft)					4306 Btuh		
Doors	Type								Area (sqft)		HTM		Load		
4	Wood - Exterior									24.0		9.6		230	Btuh
5	Wood - Exterior									24.0		9.6		230	Btuh
6	Wood - Exterior									24.0		9.6		230	Btuh
7	Wood - Exterior									24.0		9.6		230	Btuh
8	Insulated - Exterior									50.7		10.6		535	Btuh
Door Total								147 (sqft)					1457 Btuh		
Ceilings	Type/Color/Surface	U-Value					R-Value		Area(sqft)		HTM		Load		
	SnglAsmb w airsp/DarkConcrete					0.034		0.0/30.0		1614.0		0.86		1385	Btuh
Ceiling Total								1614 (sqft)					1385 Btuh		
Floors	Type						R-Value		Size		HTM		Load		
	Slab On Grade					0.0		2300 (ft-perimeter)		0.0		0		Btuh	
Floor Total								2300.0 (sqft)					0 Btuh		
	Zone Envelope Subtotal:												14697 Btuh		
Infiltration	Type	Wholehouse ACH					Volume(cuft)		Wall Ratio		CFM=		Load		
	Natural	0.35					32200		0.20		193.1		3611		Btuh
Internal gain	Occupants					Btuh/occupant		Appliance		Load					
	9					X 230		+		8600		10670		Btuh	
	Sensible Envelope Load:												28978 Btuh		
Duct load	Average sealed, Supply(R6.0-Attic), Return(R6.0-Attic)										(DGM of 0.256)		7427		Btuh
	Sensible Zone Load												36405 Btuh		

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

Climate:FL_MIAAMI_INTL_AP

6/11/2024

Component Loads for Room #2: AC2

Window	Type*						Overhang		Window Area(sqft)			HTM		Load			
	Panes	SHGC	U	InSh	IS	Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded				
1	1 NFRC	0.32, 0.66	No	No	W		12.0f	11.0f	94.3	0.0	94.3	18	42	4000	Btuh		
2	1 NFRC	0.32, 0.66	No	No	W		12.0f	11.0f	139.9	0.0	139.9	18	42	5936	Btuh		
6	1 NFRC	0.32, 0.66	No	No	E		6.6ft	0.3ft	44.4	19.2	25.1	18	42	1416	Btuh		
7	1 NFRC	0.32, 0.66	No	No	E		6.6ft	0.3ft	88.8	38.5	50.3	18	42	2831	Btuh		
8	1 NFRC	0.32, 0.66	No	No	E		6.6ft	0.3ft	177.5	77.0	100.5	18	42	5663	Btuh		
	Window Total								545 (sqft)					19845 Btuh			
Walls	Type						U-Value	R-Value	Area(sqft)			HTM		Load			
								Cav/Sheath									
1	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	232.8			2.5		582 Btuh			
2	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	191.3			2.5		478 Btuh			
3	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	191.3			2.5		478 Btuh			
4	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	199.5			2.5		499 Btuh			
5	Concrete Blk,Hollow - Adj						0.12	5.0/0.0	284.0			2.0		567 Btuh			
6	Concrete Blk,Hollow - Adj						0.12	5.0/0.0	134.2			2.0		268 Btuh			
7	Concrete Blk,Hollow - Adj						0.12	5.0/0.0	70.0			2.0		140 Btuh			
8	Concrete Blk,Hollow - Adj						0.12	5.0/0.0	68.8			2.0		137 Btuh			
9	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	85.7			2.5		214 Btuh			
16	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	145.7			2.5		364 Btuh			
	Wall Total								1603 (sqft)					3727 Btuh			
Doors	Type									Area (sqft)	HTM		Load				
1	Insulated - Exterior									90.6	10.6		957 Btuh				
2	Wood - Garage									24.0	9.6		230 Btuh				
3	Insulated - Exterior									24.0	10.6		253 Btuh				
9	Insulated - Exterior									50.7	10.6		535 Btuh				
10	Insulated - Exterior									50.7	10.6		535 Btuh				
	Door Total									240 (sqft)			2512 Btuh				
Ceilings	Type/Color/Surface						U-Value	R-Value	Area(sqft)			HTM		Load			
2	SnglAsmb w airsp/DarkConcrete						0.034	0.0/30.0	520.0			0.86		446 Btuh			
	Ceiling Total									520 (sqft)			446 Btuh				
Floors	Type									R-Value	Size		HTM		Load		
2	Slab On Grade									0.0	2396 (ft-perimeter)		0.0		0 Btuh		
	Floor Total									2396.0 (sqft)			0 Btuh				
	Zone Envelope Subtotal:													26530 Btuh			
Infiltration	Type						Wholehouse ACH		Volume(cuft)		Wall Ratio		CFM=		Load		
	Natural						0.35		33544		0.19		179.8		3361 Btuh		
Internal gain							Occupants		Btuh/occupant		Appliance		Load				
							9		X 230		+		3900		5970 Btuh		
	Sensible Envelope Load:													35861 Btuh			
Duct load	Average sealed, Supply(R6.0-Attic), Return(R6.0-Attic)													(DGM of 0.034)		1221 Btuh	
	Sensible Zone Load													37082 Btuh			

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

Climate:FL_MIAMI_INTL_AP

6/11/2024

Component Loads for Room #3: AC3

Window	Type*						Overhang		Window Area(sqft)			HTM		Load	
	Panes	SHGC	U	InSh	IS	Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded		
9	1 NFRC	0.32, 0.66	No	No	E		6.6ft	0.3ft	74.9	32.5	42.4	18	42	2391	Btuh
10	1 NFRC	0.32, 0.66	No	No	S		4.2ft	0.3ft	113.4	113.4	0.0	18	19	2059	Btuh
11	1 NFRC	0.32, 0.66	No	No	E		4.5ft	0.3ft	78.9	22.7	56.2	18	42	2796	Btuh
12	1 NFRC	0.32, 0.66	No	No	E		4.5ft	0.3ft	116.4	33.4	82.9	18	42	4125	Btuh
13	1 NFRC	0.32, 0.66	No	No	N		2.8ft	0.3ft	173.6	0.0	173.6	18	18	3152	Btuh
14	1 NFRC	0.32, 0.66	No	No	N		2.8ft	0.3ft	236.7	0.0	236.7	18	18	4298	Btuh
15	1 NFRC	0.32, 0.66	No	No	W		7.8ft	0.1ft	53.4	27.5	25.9	18	42	1600	Btuh
16	1 NFRC	0.32, 0.66	No	No	W		7.8ft	0.1ft	49.7	25.9	23.8	18	42	1479	Btuh
	Window Total								897 (sqft)					21899 Btuh	
Walls	Type					U-Value	R-Value	Area(sqft)			HTM		Load		
							Cav/Sheath								
17	Concrete Blk,Hollow - Ext					0.12	5.0/0.0		17.2			2.5		43	Btuh
18	Concrete Blk,Hollow - Ext					0.12	5.0/0.0		119.9			2.5		300	Btuh
19	Concrete Blk,Hollow - Ext					0.12	5.0/0.0		186.3			2.5		466	Btuh
20	Concrete Blk,Hollow - Ext					0.12	5.0/0.0		604.8			2.5		1512	Btuh
21	Concrete Blk,Hollow - Ext					0.12	5.0/0.0		301.0			2.5		752	Btuh
22	Concrete Blk,Hollow - Ext					0.12	5.0/0.0		123.7			2.5		309	Btuh
23	Concrete Blk,Hollow - Ext					0.12	5.0/0.0		71.9			2.5		180	Btuh
	Wall Total								1425 (sqft)					3561 Btuh	
Doors	Type							Area (sqft)			HTM		Load		
	Wood - Exterior							24.0			9.6		230	Btuh	
12	Insulated - Exterior							25.0			10.6		264	Btuh	
	Door Total								49 (sqft)					494 Btuh	
Ceilings	Type/Color/Surface					U-Value	R-Value	Area(sqft)			HTM		Load		
	SnglAsmb w airsp/DarkConcrete					0.034	0.0/30.0		403.0			0.86		346	Btuh
3	Ceiling Total								403 (sqft)					346 Btuh	
Floors	Type						R-Value	Size			HTM		Load		
	Slab On Grade						0.0	2483 (ft-perimeter)			0.0		0	Btuh	
	Floor Total								2483.0 (sqft)					0 Btuh	
	Zone Envelope Subtotal:													26300 Btuh	
Infiltration	Type					Wholehouse ACH		Volume(cuft)		Wall Ratio		CFM=		Load	
	Natural					0.35		34762		0.17		159.7		2986	Btuh
Internal gain						Occupants		Btuh/occupant			Appliance		Load		
						6		X	230	+	5400		6780	Btuh	
	Sensible Envelope Load:													36067 Btuh	
Duct load	Average sealed, Supply(R6.0-Attic), Return(R6.0-Attic) (DGM of 0.091)													3272 Btuh	
	Sensible Zone Load													39339 Btuh	

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

Climate:FL_MIAMI_INTL_AP

6/11/2024

Component Loads for Room #4: AC4

Window	Type*						Overhang		Window Area(sqft)			HTM		Load	
	Panes	SHGC	U	InSh	IS	Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded		
17	1 NFRC	0.32, 0.66	No	No	No	W	3.7ft	1.0ft	121.9	22.6	99.3	18	42	4623	Btuh
18	1 NFRC	0.32, 0.66	No	No	No	S	3.7ft	1.0ft	316.3	316.3	0.0	18	19	5743	Btuh
19	1 NFRC	0.32, 0.66	No	No	No	E	3.7ft	1.0ft	121.9	22.6	99.3	18	42	4623	Btuh
20	1 NFRC	0.32, 0.66	No	No	No	N	4.6ft	1.0ft	82.5	0.0	82.5	18	18	1498	Btuh
21	1 NFRC	0.32, 0.66	No	No	No	N	4.6ft	1.0ft	82.5	0.0	82.5	18	18	1498	Btuh
	Window Total								725 (sqft)					17984 Btuh	
Walls	Type						U-Value	R-Value	Area(sqft)		HTM		Load		
							Cav/Sheath								
24	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	86.9		2.5		217 Btuh		
25	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	89.8		2.5		224 Btuh		
26	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	86.9		2.5		217 Btuh		
27	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	24.8		2.5		62 Btuh		
28	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	64.2		2.5		160 Btuh		
29	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	191.3		2.5		478 Btuh		
30	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	64.2		2.5		160 Btuh		
31	Concrete Blk,Hollow - Ext						0.12	5.0/0.0	24.8		2.5		62 Btuh		
	Wall Total								633 (sqft)				1582 Btuh		
Ceilings	Type/Color/Surface						U-Value	R-Value	Area(sqft)		HTM		Load		
4	SnglAsmb w airsp/DarkConcrete						0.034	0.0/30.0	524.0		0.86		450 Btuh		
	Ceiling Total								524 (sqft)				450 Btuh		
Floors	Type						R-Value	Size		HTM		Load			
4	Slab On Grade						0.0	524 (ft-perimeter)		0.0		0 Btuh			
	Floor Total								524.0 (sqft)				0 Btuh		
	Zone Envelope Subtotal:												20016 Btuh		
Infiltration	Type	Wholehouse ACH					Volume(cuft)		Wall Ratio		CFM=		Load		
	Natural	0.35					7336		0.07		71.0		1327 Btuh		
Internal gain	Occupants						Btuh/occupant		Appliance		Load				
	2						X 230		+		3400		3860 Btuh		
	Sensible Envelope Load:												25202 Btuh		
Duct load	Average sealed, Supply(R6.0-Attic), Return(R6.0-Attic) (DGM of 0.047)												1173 Btuh		
	Sensible Zone Load												26375 Btuh		

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

Climate:FL_MIAAMI_INTL_AP

6/11/2024

Component Loads for Room #5: AC5

Window	Type*					Overhang		Window Area(sqft)			HTM		Load		
	Panes	SHGC	U	InSh	IS Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded			
22	1 NFRC	0.32, 0.66	No	No	W	16.8f	0.1ft	186.0	186.0	0.0	18	42	3378	Btuh	
23	1 NFRC	0.32, 0.66	No	No	SE	3.0ft	0.1ft	62.0	32.8	29.2	18	33	1573	Btuh	
24	1 NFRC	0.32, 0.66	No	No	SE	3.0ft	0.1ft	77.5	40.9	36.6	18	33	1966	Btuh	
25	1 NFRC	0.32, 0.66	No	No	SE	3.0ft	0.1ft	291.1	153.8	137.3	18	33	7384	Btuh	
33	1 NFRC	0.32, 0.95	Skylight		H	(0deg.)		9.9	0.0	9.9	18	102	1006	Btuh	
	Window Total							626 (sqft)					15306 Btuh		
Walls	Type	U-Value					R-Value		Area(sqft)		HTM		Load		
							Cav/Sheath								
	32	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		21.0		2.5	52	Btuh
	33	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		160.0		2.5	400	Btuh
	34	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		147.6		2.5	369	Btuh
	35	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		160.0		2.5	400	Btuh
	36	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		274.1		2.5	685	Btuh
	37	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		337.3		2.5	843	Btuh
	38	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		575.0		2.5	1437	Btuh
	39	Concrete Blk,Hollow - Ext					0.12		5.0/0.0		242.0		2.5	605	Btuh
	Wall Total							1917 (sqft)				4792 Btuh			
Doors	Type								Area (sqft)		HTM		Load		
13	Insulated - Exterior							25.0		10.6		264		Btuh	
14	Insulated - Exterior							25.0		10.6		264		Btuh	
	Door Total							50 (sqft)				528 Btuh			
Ceilings	Type/Color/Surface	U-Value					R-Value		Area(sqft)		HTM		Load		
5	SnglAsmb w airsp/DarkConcrete					0.034		0.0/30.0		2471.0		0.86		2121	Btuh
	Ceiling Total							2471 (sqft)				2121 Btuh			
Floors	Type						R-Value		Size		HTM		Load		
5	Raised Wood - Adj					11.0		281 (sqft)		1.2		338		Btuh	
6	Interior					11.0		689 (sqft)		0.0		0		Btuh	
7	Interior					11.0		1502 (sqft)		0.0		0		Btuh	
	Floor Total							2472.0 (sqft)				338 Btuh			
	Zone Envelope Subtotal:											23085 Btuh			
Infiltration	Type	Wholehouse ACH					Volume(cuft)		Wall Ratio		CFM=		Load		
	Natural	0.35					28417		0.22		214.9		4019 Btuh		
Internal gain						Occupants		Btuh/occupant		Appliance		Load			
						4		X 230		+		9000		9920 Btuh	
	Sensible Envelope Load:											37024 Btuh			
Duct load	Average sealed, Supply(R6.0-Attic), Return(R6.0-Attic)											(DGM of 0.118)		4356 Btuh	
	Sensible Zone Load											41380 Btuh			

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

Climate:FL_MIAAMI_INTL_AP

6/11/2024

Component Loads for Room #6: AC6

Window	Type*						Overhang		Window Area(sqft)			HTM		Load			
	Panes	SHGC	U	InSh	IS	Ornt	Len	Hgt	Gross	Shaded	Unshaded	Shaded	Unshaded				
26	1 NFRC	0.32, 0.66	No	No	SE		3.0ft	0.1ft	124.9	66.0	58.9	18	33	3167	Btuh		
27	1 NFRC	0.32, 0.66	No	No	E		3.3ft	0.1ft	67.2	17.4	49.7	18	42	2426	Btuh		
28	1 NFRC	0.32, 0.66	No	No	N		3.3ft	0.1ft	98.2	0.0	98.2	18	18	1783	Btuh		
29	1 NFRC	0.32, 0.66	No	No	N		3.3ft	0.1ft	74.1	0.0	74.1	18	18	1345	Btuh		
30	1 NFRC	0.32, 0.66	No	No	W		6.6ft	0.1ft	47.4	24.7	22.7	18	42	1411	Btuh		
31	1 NFRC	0.32, 0.66	No	No	W		8.9ft	0.1ft	131.8	93.3	38.5	18	42	3325	Btuh		
	Window Total								543 (sqft)					13457 Btuh			
Walls	Type					U-Value	R-Value		Area(sqft)			HTM		Load			
							Cav/Sheath										
40	Concrete Blk,Hollow - Ext						0.12	5.0/0.0		44.7			2.5		112	Btuh	
41	Concrete Blk,Hollow - Ext						0.12	5.0/0.0		212.8			2.5		532	Btuh	
42	Concrete Blk,Hollow - Ext						0.12	5.0/0.0		241.3			2.5		603	Btuh	
43	Concrete Blk,Hollow - Ext						0.12	5.0/0.0		423.7			2.5		1059	Btuh	
44	Concrete Blk,Hollow - Ext						0.12	5.0/0.0		240.5			2.5		601	Btuh	
45	Concrete Blk,Hollow - Ext						0.12	5.0/0.0		87.2			2.5		218	Btuh	
	Wall Total								1250 (sqft)					3125 Btuh			
Doors	Type					U-Value	R-Value		Area (sqft)			HTM		Load			
15	Insulated - Exterior								25.0			10.6		264	Btuh		
16	Insulated - Exterior								25.0			10.6		264	Btuh		
17	Insulated - Exterior								25.0			10.6		264	Btuh		
18	Insulated - Exterior								25.0			10.6		264	Btuh		
19	Insulated - Exterior								25.0			10.6		264	Btuh		
	Door Total								125 (sqft)					1320 Btuh			
Ceilings	Type/Color/Surface					U-Value	R-Value		Area(sqft)			HTM		Load			
6	SnglAsmb w airsp/DarkConcrete						0.034	0.0/30.0		2443.0			0.86		2097	Btuh	
	Ceiling Total								2443 (sqft)					2097 Btuh			
Floors	Type					U-Value	R-Value		Size			HTM		Load			
8	Interior								11.0			366 (sqft)		0.0	0	Btuh	
9	Interior								11.0			2077 (sqft)			0.0	0	Btuh
	Floor Total								2443.0 (sqft)					0 Btuh			
	Zone Envelope Subtotal:													19999 Btuh			
Infiltration	Type					Wholehouse ACH		Volume(cuft)			Wall Ratio		CFM=		Load		
	Natural						0.35		28095			0.15		140.2		2621	Btuh
Internal gain					Occupants		Btuh/occupant			Appliance			Load				
					4		X 230			+			9000		9920	Btuh	
	Sensible Envelope Load:													32540 Btuh			
Duct load	Average sealed, Supply(R6.0-Attic), Return(R6.0-Attic)													(DGM of 0.118)		3829 Btuh	
	Sensible Zone Load													36368 Btuh			

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

Climate:FL_MIAMI_INTL_AP

6/11/2024

The following window Excursion will be assigned to the system loads.

Windows	July excursion for System 1	0 Btuh
	July excursion for System 2	1693 Btuh
	July excursion for System 3	0 Btuh
	July excursion for System 4	0 Btuh
	July excursion for System 5	0 Btuh
	Excursion Subtotal:	1693 Btuh
Duct load		58 Btuh
	Sensible Excursion Load	1751 Btuh

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

Climate:FL_MIAMI_INTL_AP

6/11/2024

SYSTEM GROUPS (BLOCK LOADS)

Cooling Loads For System(s): 1 Block #1:Block1 Serving Zones: 1	Sensible Envelope Load	28978 Btuh
	Window Excursion	0 Btuh
	Sensible Duct Load (duct gain multiplier of 0.256)	7427 Btuh
	Sensible ventilation (Ex:0 cfm; Sup:0 cfm)	0 Btuh
	Zone Sensible gain	36405 Btuh
	Latent infiltration/ventilation gain	7353 Btuh
	Latent duct gain	2035 Btuh
	Latent occupant gain	1800 Btuh
	Latent other gain	2000 Btuh
	Total block load	49593 Btuh

Cooling Loads For System(s): 2 Block #2:Block2 Serving Zones: 2	Sensible Envelope Load	35861 Btuh
	Window Excursion	1693 Btuh
	Sensible Duct Load (duct gain multiplier of 0.034) (Includes 58 Btuh due to window excursion)	1279 Btuh
	Sensible ventilation (Ex:0 cfm; Sup:0 cfm)	0 Btuh
	Zone Sensible gain	38833 Btuh
	Latent infiltration/ventilation gain	6844 Btuh
	Latent duct gain	409 Btuh
	Latent occupant gain	1800 Btuh
	Latent other gain	1750 Btuh
	Total block load	49636 Btuh

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

Climate:FL_MIAMI_INTL_AP

6/11/2024

SYSTEM GROUPS (BLOCK LOADS)

Cooling Loads For System(s): 3 Block #3:Block3 Serving Zones: 3	Sensible Envelope Load	36067 Btuh
	Window Excursion	0 Btuh
	Sensible Duct Load (duct gain multiplier of 0.091)	3272 Btuh
	Sensible ventilation (Ex:0 cfm; Sup:0 cfm)	0 Btuh
	Zone Sensible gain	39339 Btuh
	Latent infiltration/ventilation gain	6082 Btuh
	Latent duct gain	1455 Btuh
	Latent occupant gain	1200 Btuh
	Latent other gain	1750 Btuh
	Total block load	49826 Btuh

Cooling Loads For System(s): 4 Block #4:Block4 Serving Zones: 4	Sensible Envelope Load	25203 Btuh
	Window Excursion	0 Btuh
	Sensible Duct Load (duct gain multiplier of 0.047)	1173 Btuh
	Sensible ventilation (Ex:0 cfm; Sup:0 cfm)	0 Btuh
	Zone Sensible gain	26375 Btuh
	Latent infiltration/ventilation gain	2702 Btuh
	Latent duct gain	299 Btuh
	Latent occupant gain	400 Btuh
	Latent other gain	1750 Btuh
	Total block load	31526 Btuh

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave

Climate:FL_MIAMI_INTL_AP

6/11/2024

SYSTEM GROUPS (BLOCK LOADS)

Cooling Loads For System(s): 5 Block #5:Block5 Serving Zones: 5, 6	Sensible Envelope Load	69564 Btuh
	Window Excursion	0 Btuh
	Sensible Duct Load (duct gain multiplier of 0.118)	8185 Btuh
	Sensible ventilation (Ex:0 cfm; Sup:0 cfm)	0 Btuh
	Zone Sensible gain	77749 Btuh
	Latent infiltration/ventilation gain	13520 Btuh
	Latent duct gain	2273 Btuh
	Latent occupant gain	1600 Btuh
	Latent other gain	4000 Btuh
	Total block load	99142 Btuh

WHOLE HOUSE TOTALS

Whole House Totals for Cooling	Sensible Envelope Load All Zones	197365 Btuh
	Sensible Duct Load	21336 Btuh
	Total Sensible Zone Loads	218701 Btuh
	Sensible ventilation (Ex:0 cfm; Sup:0 cfm)	0 Btuh
	Blower	0 Btuh
	Total sensible gain	218701 Btuh
	Latent infiltration gain (for 56 gr. humidity difference)	36500 Btuh
	Latent ventilation gain	0 Btuh
	Latent duct gain	6471 Btuh
	Latent occupant gain (34.0 people @ 200 Btuh per person)	6800 Btuh
	Latent other gain	11250 Btuh
	Latent total gain	61021 Btuh
	TOTAL GAIN	279722 Btuh

Manual J Summer Calculations

Residential Load - Component Details (continued)

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave


Climate:FL_MIAMI_INTL_AP

6/11/2024

EQUIPMENT

1. Central Unit	#	57000 Btuh
2. Central Unit	#	57000 Btuh
3. Central Unit	#	57000 Btuh
4. Central Unit	#	35600 Btuh
5. Central Unit	Multiple #Multiple	114000 Btuh

*Key: Window types (Panels - Number and type of panes of glass)
(SHGC - Shading coefficient of glass as SHGC numerical value)
(U - Window U-Factor)
(InSh - Interior shading device: none(No), Blinds(B), Draperies(D) or Roller Shades(R))
- For Blinds: Assume medium color, half closed
For Draperies: Assume medium weave, half closed
For Roller shades: Assume translucent, half closed
(IS - Insect screen: none(N), Full(F) or Half(½))
(Ornt - compass orientation)



Version 8

Residential System Sizing Calculation

Summary

11041 SW 77th Ave
Miami, FL 33156

Project Title:
New residence @ 11041 SW 77th Ave


6/11/2024

Location for weather data: Miami, FL - Defaults: Latitude(25.82) Altitude(7 ft.) Temp Range(L)					
Humidity data: Interior RH (50%) Outdoor wet bulb (77F) Humidity difference(56gr.)					
Winter design temperature(TMY3 99%)	49	F	Summer design temperature(TMY3 99%)	92	F
Winter setpoint	70	F	Summer setpoint	75	F
Winter temperature difference	21	F	Summer temperature difference	17	F
Total heating load calculation	144548	Btuh	Total cooling load calculation	279722	Btuh
Submitted heating capacity	% of calc	Btuh	Submitted cooling capacity	% of calc	Btuh
Total (Electric Strip Heat)	136.9	197900	Sensible (SHR = 0.75)	109.9	240450
			Latent	131.3	80150
			Total	114.6	320600

WINTER CALCULATIONS

Winter Heating Load (for 12617 sqft)


Load component	Load
Window total	3747 sqft 51996 Btuh
Wall total	8551 sqft 21074 Btuh
Door total	611 sqft 5899 Btuh
Ceiling total	7975 sqft 5694 Btuh
Floor total	See detail report 21879 Btuh
Infiltration	849 cfm 19611 Btuh
Duct loss	18394 Btuh
Subtotal	144548 Btuh
Ventilation	Ex:0 cfm; Sup:0 cfm 0 Btuh
TOTAL HEAT LOSS	144548 Btuh

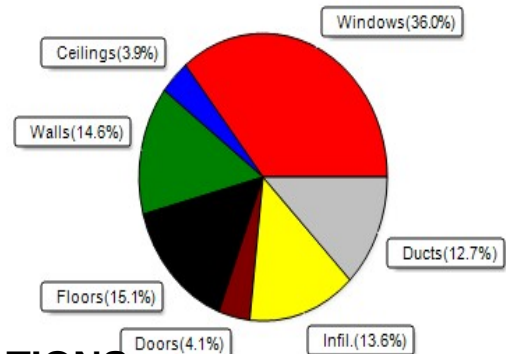

SUMMER CALCULATIONS

Summer Cooling Load (for 12617 sqft)

Load component	Load
Window total	3747 sqft 97733 Btuh
Wall total	8551 sqft 21094 Btuh
Door total	611 sqft 6311 Btuh
Ceiling total	7975 sqft 6844 Btuh
Floor total	338 Btuh
Infiltration	959 cfm 17924 Btuh
Internal gain	47120 Btuh
Duct gain	21336 Btuh
Sens.Ventilation	Ex:0 cfm; Sup:0 cfm 0 Btuh
Blower Load	0 Btuh
Total sensible gain	218701 Btuh
Latent gain(ducts)	6471 Btuh
Latent gain(infiltration)	36500 Btuh
Latent gain(ventilation)	0 Btuh
Latent gain(internal/occupants/other)	18050 Btuh
Total latent gain	61021 Btuh
TOTAL HEAT GAIN	279722 Btuh

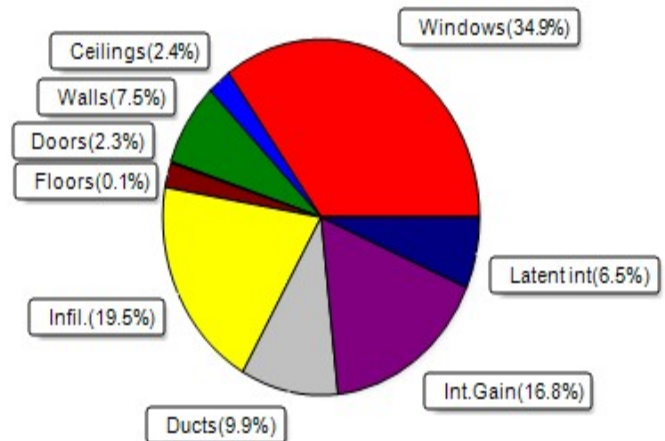

8th Edition

EnergyGauge® System Sizing

PREPARED BY: ☐ D ☐ A ☐ R ☐ D ☐ A ☐ R ☐ R

DATE: 06-11-2024 Eduardo A Barreto

Digitally signed by

Eduardo A Barreto

Date: 2024.06.11

22:50:51 -04'00'