

ASPHALTIC CONCRETE VEHICULAR:
FIRST LIFT - 1" FDOT - SP 9.5 (FINE MIX). SECOND (FINAL) LIFT - 1" FDOT - SP 9.5 (FINE MIX). ASPHALT SURFACE COURSE SHALL CONFORM TO THE REQUIREMENTS OF FDOT STANDARDS SPECIFICATIONS SECTIONS 330 AND 334. SECOND LIFT OF ASPHALT SHALL NOT BE PLACED UNTIL FINAL LANDSCAPE/HARDSCAPE HAS BEEN INSTALLED.

PRIME AND TACK COAT:
LIMEROCK BASE COURSE SHALL CONFORM TO THE REQUIREMENTS OF FDOT STANDARDS SPECIFICATIONS SECTION 300.
APPLICATION RATES:
PRIME COAT - 0.10 GALLONS PER SQ. YD.
TACK COAT - 0.08 GALLONS PER SQ. YD.

BASE:
8"/ 6" LIMEROCK BASE COMPACTED TO 98% OF MAXIMUM DENSITY (AASHTO T-180), LIMEROCK BASE TO CONFORM WITH THE REQUIREMENTS OF FDOT SPECIFICATIONS SECTIONS 200 AND 911.

SUBGRADE:
12" STABILIZED SUBGRADE COMPACTED TO 98% OF MAXIMUM DENSITY (AASHTO T-180); MINIMUM LBR = 40.

1 ASPHALT PAVEMENT DETAIL
NOT TO SCALE



NOTE:
ALL TYPE "D" CURB SHALL BE IN ACCORDANCE WITH THE STANDARD REQUIREMENTS OF FDOT INDEX 520-001.

2 TYPE "D" CURB DETAIL PER FDOT INDEX No. 520-001
NOT TO SCALE

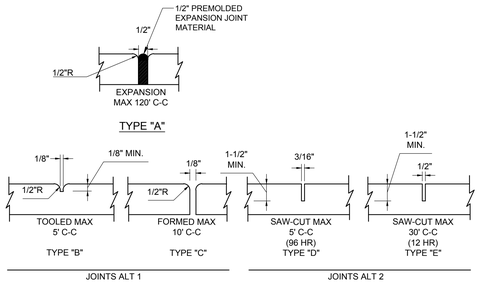

CONCRETE PAVEMENT & SIDEWALK JOINTS



SIDEWALK PLAN

NOTES:
1. Sidewalk construction is to comply with the latest FDOT standards for sidewalks and ADA curb ramps, per FDOT index 522-001 and 522-002.
2. Provide either joint alternate 1 or 2. If using joint alternate 2: construct type "E" joints at not more than 30' intervals - within 12 hours after finishing, construct 1/2" expansion, provide joint type "A", with non-rising performed joint filler at not more than 120' intervals, construct remaining joints within 96 hours after finishing.
3. Provide 1/2" expansion joint type "A", with non-rising performed joint filler where concrete pavement abuts concrete curbs, driveways and other fixed objects.
4. Sidewalk thickness shall be 4" thick unless otherwise noted. Thickness shall be 6" through driveways and on all commercial sidewalk applications.
5. The use of steel reinforcement is not permitted.
6. Concrete to be 3,000 psi in 28 days.
7. Cure all concrete with approved method.
8. Sidewalk foundation shall be compacted to a firm, even surface, true to grade and cross section, and shall be moist at the time concrete is placed.
9. All construction shall conform to local construction codes and standards.
10. Sidewalk slopes shall meet the requirements of the Americans with Disabilities Act. Minimum transverse slope 0.01 ft./ft. And maximum transverse slope 0.02 ft./ft. toward swale or gutter. Longitudinal slope shall conform to ADA requirements.
11. The vertical deviation for a new sidewalk shall not be more than ½".
12. The vertical deviation for a new maintenance access structure cover shall not be more than ¼".
13. Where truncated domes are used, stamped concrete is not permitted. Truncated domes to be cast with the concrete.
14. Sidewalk shall have a transverse hair broom finish.

3 SIDEWALK DETAIL
NOT TO SCALE

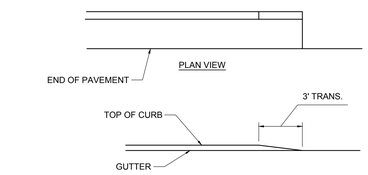

NOTE:
ALL CURB & GUTTER FLARED AND STRAIGHT ENDS SHALL BE IN ACCORDANCE WITH THE STANDARD REQUIREMENTS OF FDOT INDEX 520-001.

4 CURB & GUTTER FLARED AND STRAIGHT ENDS
NOT TO SCALE

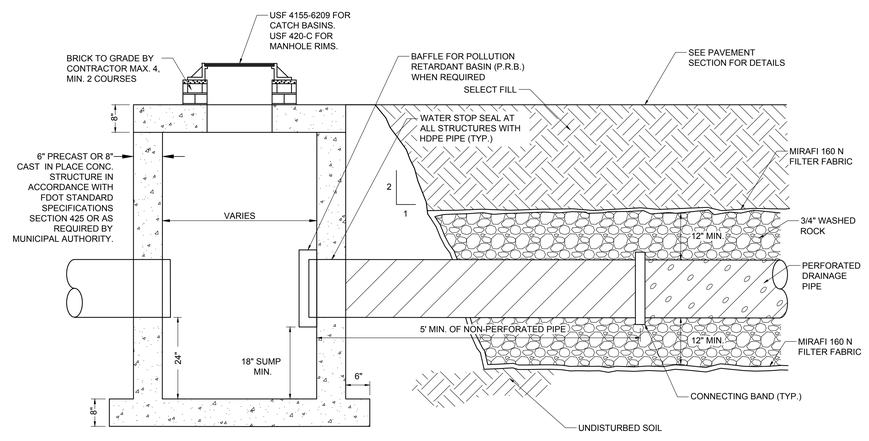

5 CATCH BASIN W/ PRB AND EXFILTRATION TRENCH
NOT TO SCALE



PLAN VIEW
TOP SLAB
FOR CATCH BASINS



PLAN VIEW
TOP SLAB
FOR MANHOLES

6 CATCH BASIN / MANHOLE FRAME DETAIL
NOT TO SCALE

PROJECT LEAD & CIVIL ENGINEERING:
KEITH
301 EAST ATLANTIC BLVD.
POMPANO BEACH, FL 33060
PH: (954) 788-3400
Florida Engineering Business License: CA7928
Florida Surveyor and Mapper Business License: LB6860
Florida Landscape Architecture Business License: LC26000457

LANDSCAPE ARCHITECT:
MKSK
801 INTERNATIONAL PARKWAY
LAKE MARY, FL 32746
407.871.9607
MKSKSTUDIOS.COM

ARCHITECT:
WANNEMACHER JENSEN ARCHITECTS
815 NORTHWEST 57 AVE. SUITE 219
MIAMI, FLORIDA 33126
727-822-5566
WJARC.COM AA0002277

MECHANICAL, PLUMBING, & ELECTRICAL ENGINEERING:
SGM ENGINEERING
5301 WATERFORD DISTRICT DR.
SUITE 750
954-421-1944
SGMENGINEERING.COM CA-00006208

REVISIONS

NO.	DESCRIPTION	DATE
	ISSUED FOR BUILDING PERMIT	11/21/2024

ISSUE DATE: 11/21/2024
DESIGNED BY: DS
DRAWN BY: HA
CHECKED BY: TD

This item has been digitally signed and sealed by Thomas F. Donahue, P.E. on the date below, using a Digital Signature.
Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.
THOMAS F. DONAHUE LICENSE No. 60529 11/21/2024 STATE OF FLORIDA PROFESSIONAL ENGINEER

THOMAS F. DONAHUE, P.E.
FLORIDA REG. NO. 60529
(FOR THE FIRM)

CLIENT
VILLAGE OF PINECREST
PINECREST PARKS & RECREATION

PROJECT
GARY MATZNER PARK

SHEET TITLE
PAVING, GRADING, AND DRAINAGE DETAILS

SHEET NUMBER CP-501

KEITH PROJECT NUMBER 13861.00

Plotted by: cdelarroy On 11/20/2024 4:08 PM
Drawing name: K:\13861.00 - Gary Matzner Park Design - Village of Pinecrest\Engineering\Cad\13861.00-CP-SXX.dwg
STATUS: CONSTRUCTION DOCUMENTS