
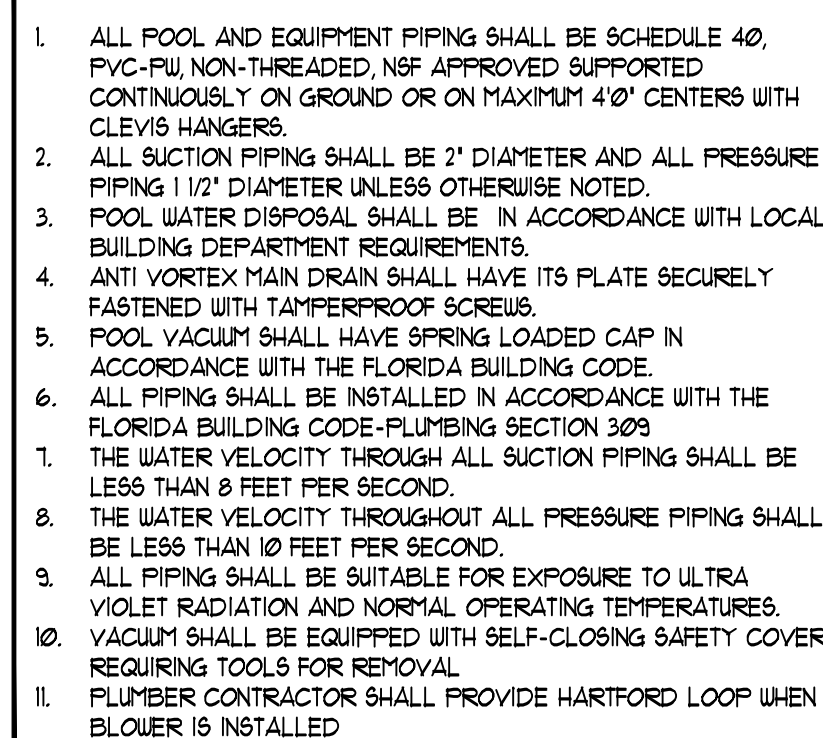

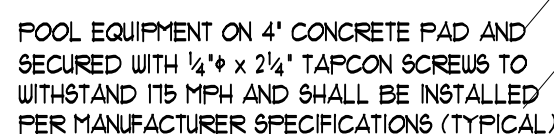
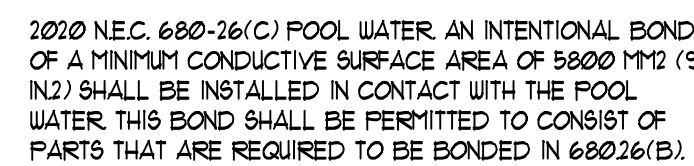
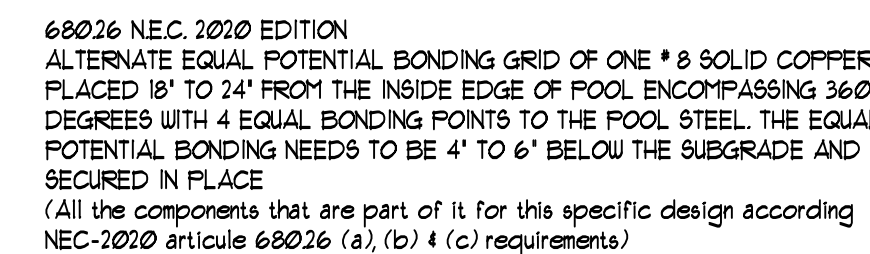


SIZE & DEPTH	15' x 30'	3' TO 5'
CAPACITY	9669 GALLONS	
PERIMETER/AREA	90 L.F. / 450 SQ.FT.	
PUMP *	125 HP. (VARIABLE SPEED)	
FILTER *	CARTRIDGE (200 SQ.FT.)	
TILE	6" CHOICE	
TYPE OF PATIO	SLIP RESISTANT	
EXIT RAILINGS	-	
COPING	STONE	
TURN/OVER	15 HOUR	

* 9669 GALLONS RE-CIRCULATED IN 1.9 HOUR
200 SQFT. FILTER AREA @ 1 GPM / SQFT FILTER RATED
AND 1.85 HP RE-CIRCULATION POOL PUMP 1 PHASE,
230V, 84 GPM @ 50' TDH

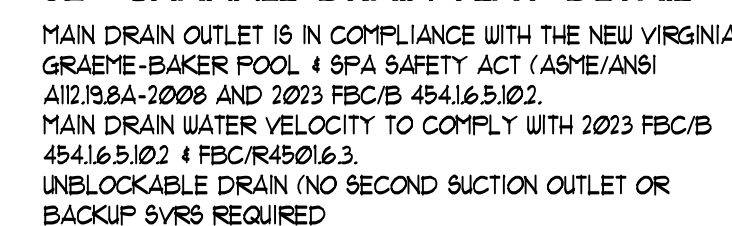

EXISTING ELECTRICAL SERVICE HAS ENOUGH
CAPACITY TO HANDLE ALL ELECTRICAL
LOADS ADDED

ELECTRICAL DATA NEW 100A PANEL "P"		FEEDER: THRU 2P/60A IN 200A PANEL WITH 3 * 6" 1" 10 THIN CU IN 3/4"			120 / 240V 16 3W NEMA 3R
CKTS	SERVICES	C.B.	P	KW	WIRE - COND
CKT - 1, 3	POOL PUMP (GFCI)	20	2	123	* 12 - 1/2" C
CKT - 2, 4	BLOWER (GFCI)	20	2	232	* 12 - 1/2" C
CKT - 5	POOL LIGHTS (GFCI)	20	1	03	* 12 - 1/2" C

386 KW @ 100% / 240V = 16 AMP'S
(GFCI) GRIND MILL CIRCUIT INTERRUPTER

SHEET
2
OF 2 SHEETS

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY OLGA V. CORDERO P.E. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED IN ANY ELECTRONIC COPIES.