


SECTION "A"-"A"  
FOR EROSION PLAN DETAIL ONLY

NOTES:

1. THE CONSTRUCTION ENTRANCE SHALL BE MAINTAINED IN A CONDITION SO IT PREVENTS SEDIMENT FROM TRACKING OFF THE CONSTRUCTION SITE ONTO THE PUBLIC RIGHT-OF-WAY. THIS MAY REQUIRE THE CLEANING OR REPLACEMENT OF THE COURSE AGGREGATE
2. IT MAY BE NECESSARY TO WASH THE TRUCK TIRES THAT WILL BE LEAVING THE SITE
3. IF WASHING IS REQUIRED THEN IT WILL BE DONE SO THAT THE WASH RUN-OFF GOES TO A DEPRESSED AREA ADJACENT TO THE CONSTRUCTION ENTRANCE AND NOT FLOW TO THE PUBLIC RIGHT-OF-WAY

CONSTRUCTION ENTRANCE DETAIL

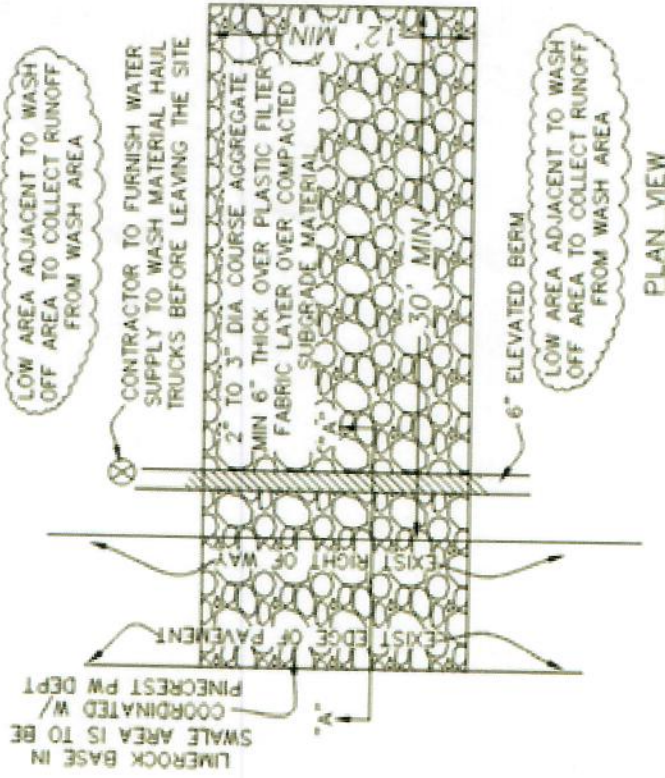

- UNLESS OTHERWISE SPECIFICALLY DIRECTED: NO SIDEWALK IS TO BE REMOVED FOR THE PURPOSE OF INSTALLING THE BALLAST ROCK ENTRANCE
- BALLAST ROCK IS DEFINED AS 2"-3" DIAMETER LIMEROCK AGGREGATE – NO 57# STONE – NO PEA ROCK – NOTHING BUT BALLAST ROCK