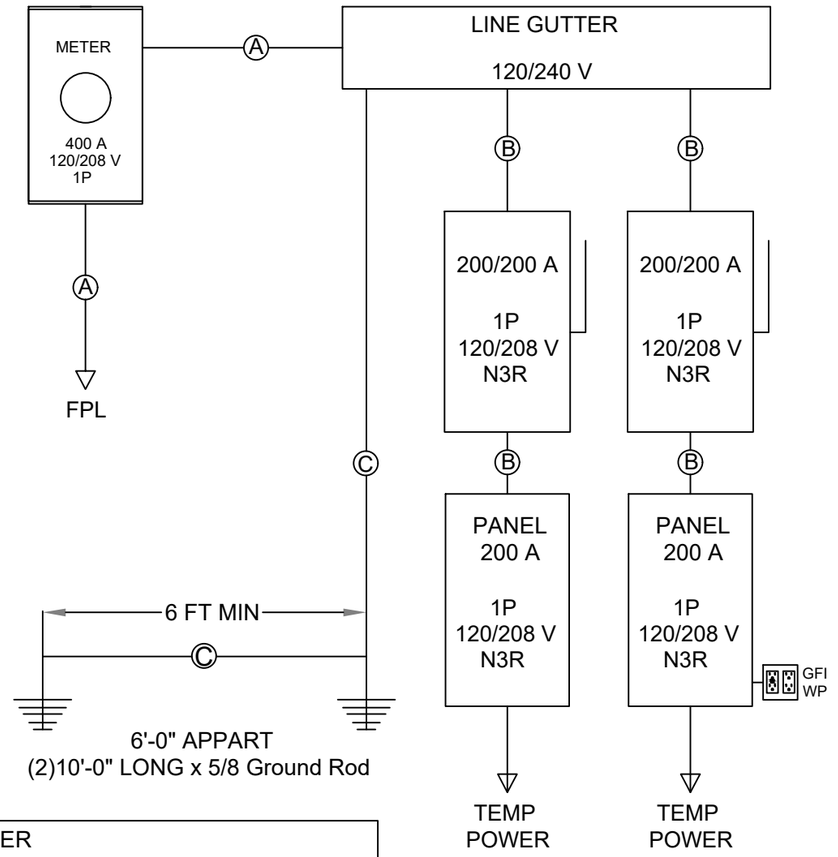

FEEDER	
A	2 SETS 3#250 MCM AL & 1#1 GRD AL IN 2-1/2 INCH PVC
B	3#250 MCM AL & 1#4 GRD AL
C	1#3/0 GRD CU

Electrical Riser Notes:

1. All service entrance and brach conductors should be installed in PVC riseways in full compliance with NEC 230.43(11)
2. Electrical service shall be installed above flood elevation.
3. Gutter shall be bonded according to NEC 250.92(A)
4. Pull boxes and gutters shall be NEMA 3R suitable for outdoor installations in compliance with NEC 300.6

Statewide Electrical Contractors Inc
EC - 0003051
George Fernandez
14100 SW 182 Ave. Miami, FL 33196

STATEWIDE ELECTRICAL CONTRACTORS, INC.

PROJECT

MILO RESIDENCE
11901 SW 63rd AVE
Pinecrest, FL
33156

REVISIONS

REV #.

REV ___

DATE

08/12/26

DESCRIPTION

Temporary Power For Construction

DATA

ISSUE DATE:
08/12/26
DRAWN BY:
Noel Alonso
PM.
—

SHEET TITLES

TP

SHEET NUMBER

TP-01