TEMPORARY FENCE CONSTRUCTION

1. FENCES MAY BE CONSTRUCTED WITHOUT A TOP AND BOTTOM RAIL.

2. GATES MUST REMAIN IN GOOD WORKING ORDER AND MUST BE CLOSED AND SECURED DURING NON-WORKING HOURS.

3. GATES SHALL BE CONSTRUCTED SO THAT THEY SWING IN TOWARDS THE CONSTRUCTION SITE.

4. GATES MUST BE CONSTRUCTED WITH THE SAME DESIGN CHARACTERISTICS AS THE TEMPORARY CONSTRUCTION FENCE.

5. DARK GREEN FABRIC SCREEN SHALL BE ANCHORED IN EACH GROMMET WITH ZIP TIES.

6. FABRIC WEIGHT SHALL MEET OR EXCEED FIVE AND THREE-TENTHS (5.3) OUNCES PER SQUARE YARD. FABRIC SHALL HAVE A THREE-PLY REINFORCED HEM ON TOP AND BOTTOM WITH BRASS GROMMETS EVERY 12".

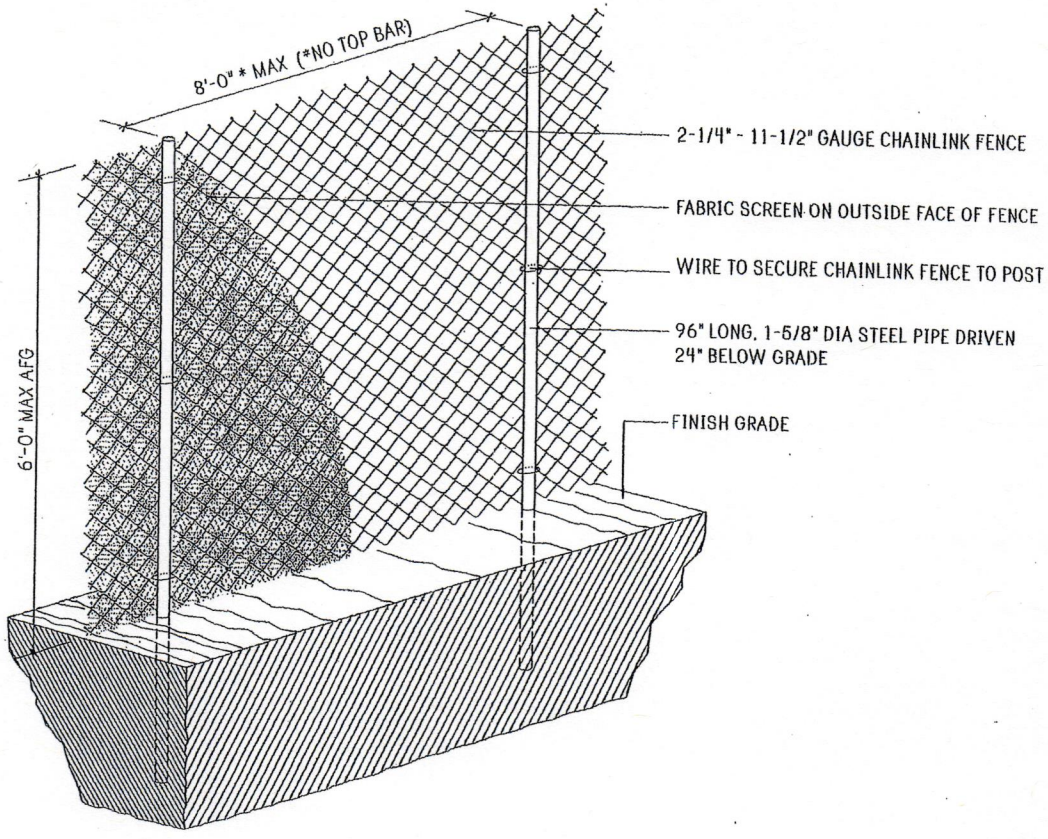

VILLAGE OF PINECREST

04 DEC 2015

TEMPORARY CONSTRUCTION FENCE