

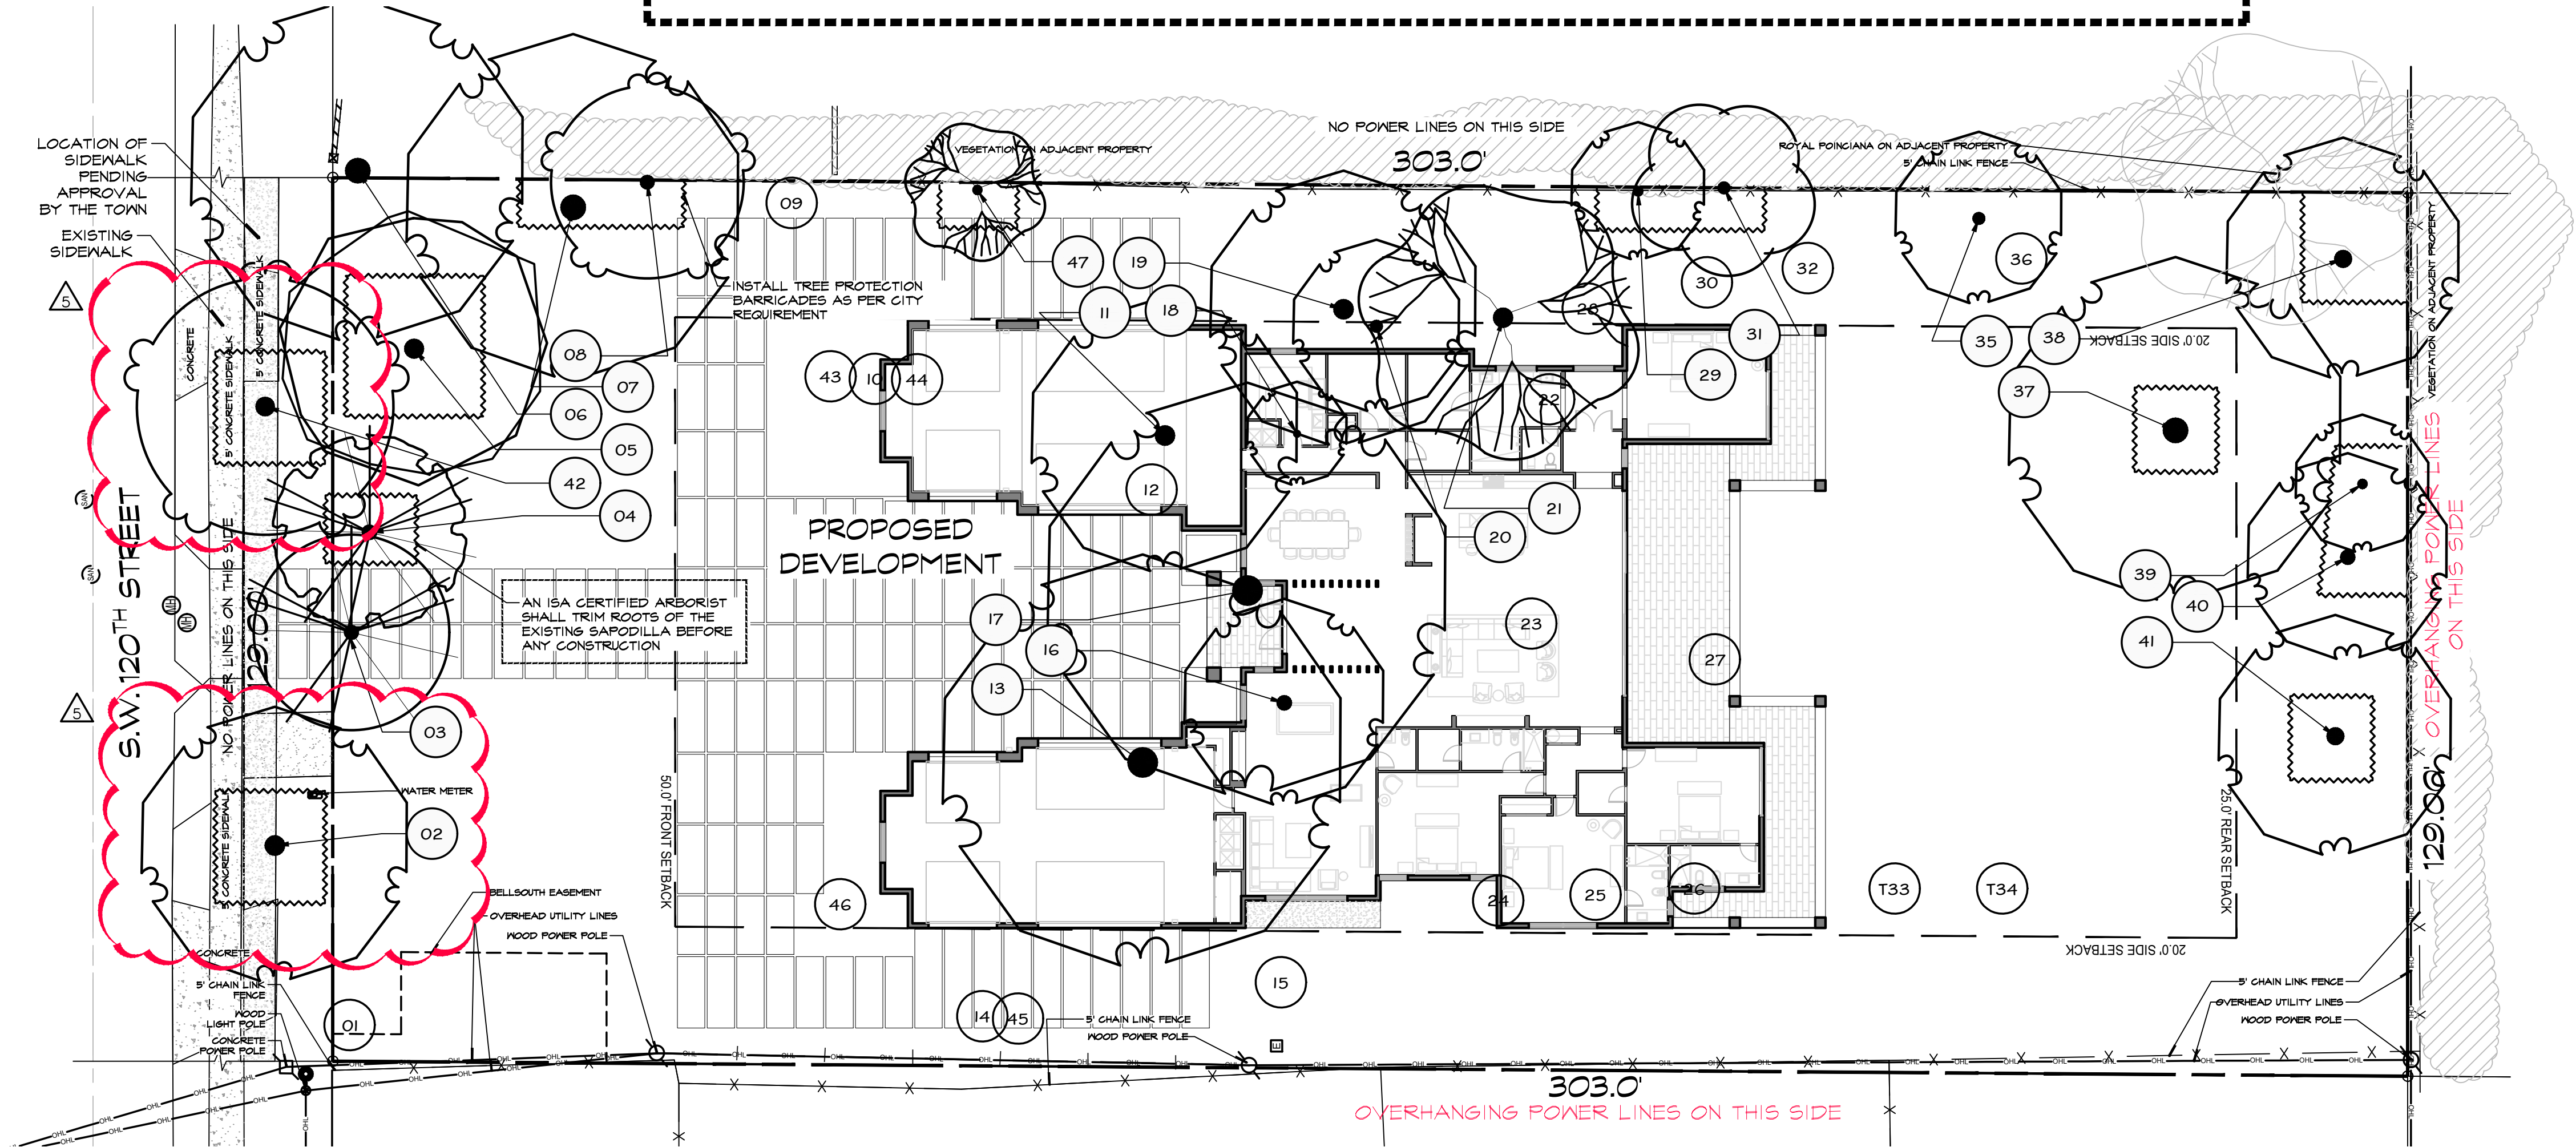


NUMBERS IN CIRCLES SHOW TREES REMOVED WITHOUT PERMIT
ALL INFORMATION REGARDING TREES (EXISTING AND REMOVED) PROVIDED BY
BIG RON'S TREE SERVICE IN ARBORIST'S REPORT FROM MAY 15TH, 2024
SEE DT-2

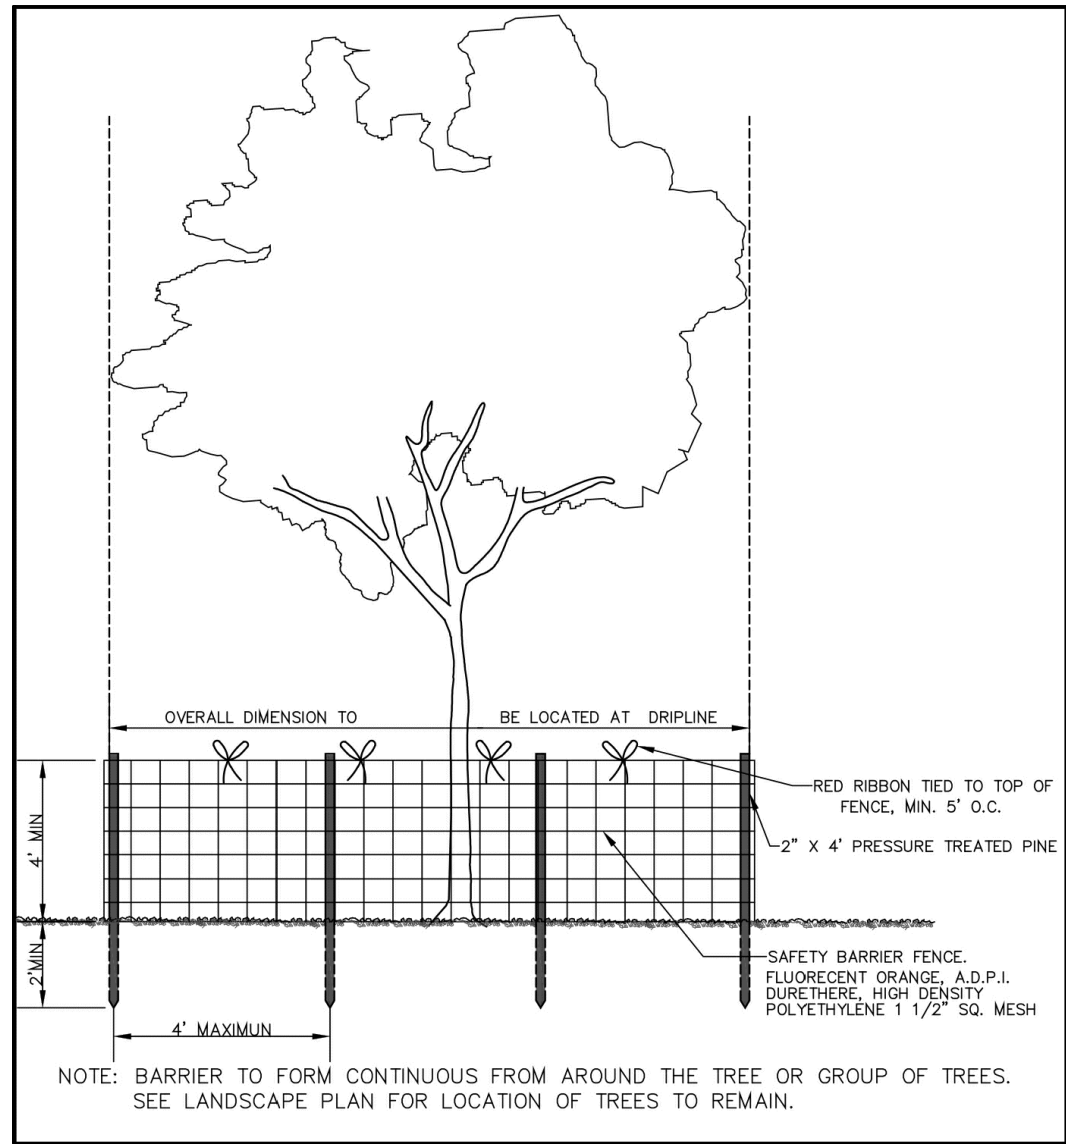

A GENERAL LAYOUT
scale 1/16" = 1'-0"

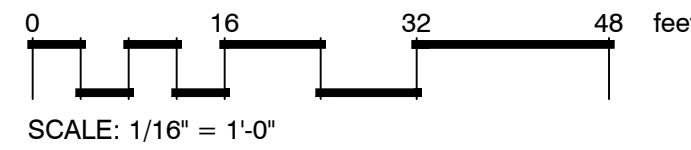

B TREE PROTECTION DETAIL
not to scale

 IF YOU DIG FLORIDA...
CALL US FIRST!
1-800-432-4770
SUNSHINE STATE ONECALLING
OF FLORIDA, INC.
IT'S THE LAW

NOTE:
INDICATED UTILITIES ARE APPROXIMATE.
CONTRACTOR IS RESPONSIBLE FOR VERIFICATION
OF ALL UTILITIES ON SITE PRIOR TO
COMMENCEMENT OF ANY WORK.
LANDSCAPE ARCHITECT ASSUMES NO LIABILITY
FOR UTILITY DAMAGE.

PLANT SCHEDULE

CODE	BOTANICAL NAME	COMMON NAME	DBH	HEIGHT/CT	CANOPY	CONDITION	NOTES	ACTION
TREES								
01*	Cocos nucifera	Coconut palm	12"	8' OA	20'	Fair		REMOVED
02	Quercus virginiana	Live Oak	16.5"	35' OA	40'	Fair		TO REMAIN
03	Persea americana	Avocado	15"+16"	30' OA	30'	Poor		REMOVE
04	Manilkara zapota	Sapodilla	14"+14"+11"	35' OA	30'	Fair		TO REMAIN
05	Bucida buceras	Black Olive	31"	40' OA	40'	Fair		TO REMAIN
06	Quercus virginiana	Live Oak	28"	40' OA	50'	Fair	MIGHT BE ON PROP. LINE	TO REMAIN
07	Quercus virginiana	Live Oak	20"	35' OA	50'	Fair		TO REMAIN
08	Swietenia mahagoni	West Indian Mahogany	10"	30' OA	30'	Fair	ON PROP. LINE	TO REMAIN
09*	Dyopsis lutescens	Areca Palm	N/A	25' OA	25'	Fair		REMOVED
10*	Quercus virginiana	Live Oak	19"+21"	35' OA	40'	Fair	unbalanced	REMOVE
12*	Adonidia merrillii	Christmas Palm	7"	30' OA	10'	Fair		REMOVED
13	Quercus virginiana	Live Oak	33"	45' OA	60'	Fair		REMOVE
14*	Wodyetia bifurcata	Foxtail palm	5"	15' OA	10'	Fair		REMOVED
15*	Dimocarpus longan	Longan	14"	25' OA	25'	Fair		REMOVED
16	Quercus virginiana	Live Oak	17"	40' OA	30'	Fair		REMOVE
17	Quercus virginiana	Live Oak	19"+15"	45' OA	60'	Fair	unbalanced	REMOVE
18	Quercus virginiana	Live Oak	25"	45' OA	15'	Fair	unbalanced	REMOVE
19	Quercus virginiana	Live Oak	20"	45' OA	40'	Fair	unbalanced	REMOVE
20	Quercus virginiana	Live Oak	12"	30' OA	25'	Fair	unbalanced, leaning	REMOVE
21	Delonix regia	Royal Poinciana	28"	40' OA	40'	Fair		REMOVE
22*	Mangifera indica	Mango	10"	20' OA	20'	Fair		REMOVED
23*	Persea americana	Avocado	6"	20' OA	20'	Fair		REMOVED
24*	Mangifera indica	Mango	18"	25' OA	30'	Fair		REMOVED
25*	Mangifera indica	Mango	16"	30' OA	25'	Fair		REMOVED
26*	Mangifera indica	Mango	12"+10"+8"	25' OA	30'	Fair		REMOVED
27*	Mangifera indica	Mango	7"+7"	15' OA	20'	Fair		REMOVED
28*	Mangifera indica	Mango	18"+10"	25' OA	25'	Fair		REMOVED
29	Quercus virginiana	Live Oak	10"	25' OA	20'	Fair	on property line	TO REMAIN
30*	Persea americana	Avocado	4"+6"	20' OA	25'	Fair		REMOVED

PLANT SCHEDULE

CODE	BOTANICAL NAME	COMMON NAME	DBH	HEIGHT/CT	CANOPY	CONDITION	NOTES	ACTION
31	Koeleruteria paniculata	Golden rain	7"	30' OA	25'	Fair	ON PROP. LINE	TO REMAIN
32*	Persea americana	Avocado	5"	25' OA	20'	Fair		REMOVED
33*	Mangifera indica	Mango	10"+12"	20' OA	30'	Fair		REMOVED
34*	Mangifera indica	Mango	14"+10"	20' OA	30'	Fair		REMOVED
35	Quercus virginiana	Live Oak	6"	25' OA	25'	Fair	unbalanced, leaning	REMOVE
36	Mangifera indica	Mango	8"+8"	25' OA	25'	Fair		REMOVED
37	Quercus virginiana	Live Oak	21"	35' OA	50'	Fair		TO REMAIN
38	Quercus virginiana	Live Oak	19"	40' OA	35'	Fair		TO REMAIN
39	Quercus virginiana	Live Oak	13"	25' OA	20'	Fair		TO REMAIN
40	Quercus virginiana	Live Oak	19"	35' OA	30'	Fair		TO REMAIN
41	Quercus virginiana	Live Oak	21"	35' OA	35'	Fair		TO REMAIN
42	Swietenia mahagoni	West Indian Mahogany	23"	40' OA	40'	Fair		TO REMAIN
43*	Adonidia merrillii	Christmas Palm	8"	25' OA	10'	Fair		REMOVED
44*	Cornus florida	Dogwood	4"	20' OA	25'	Fair		REMOVED
45*	Wodyetia bifurcata	Foxtail palm	6"	15' OA	10'	Fair		REMOVED
46*	Adonidia merrillii	Christmas Palm	6"	20' OA	10'	Fair		REMOVED
47	Delonix regia	Royal Poinciana double trunk	4"+4"	30' OA	20'	VOLUNTEER/poor		TO REMAIN


(*) TREES REMOVED WITHOUT PERMIT



The Mirror of Paradise

Gabriela Fojt
LA 6667277
ISA FL-10207A

2300 E Oakland Park Blvd
Suite 208
Fort Lauderdale
FL 33306
c (954) 478 3064
www.florida-landscape.com
gabriela@themirrorofparadise.com

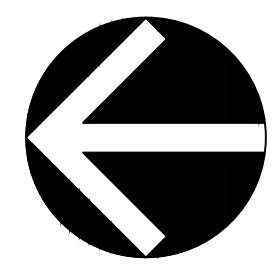

SCALE	1/16"=1'-0"
DESIGNED BY	GF
DRAWN BY	KM,GF
CHECKED BY	GF
CAD DWG.	
DATE	01.21.2025
REVISIONS	
per City comments	05.19.2025
per City comments	06.26.2025
per City comments	07.15.2025
per City comments	07.29.2025
per City comments	08.23.2025

8100 S.W. 120th STREET
PINECREST
FL 33156

REMOVAL PLAN, EXISTING TREES LIST, TREE PROT. DETAIL



Address: 8100 SW 120th St Pinecrest Fl 33156

Date: May 15th, 2024

Project Location map

No.	Botanical Name	Common Name	D.B.H. /In.	Height /ft.	Spread /ft.	Condition	Remarks
1	<i>Cocos nucifera</i>	Coconut	12	8	20	<i>fair</i>	
2	<i>Quercus virginiana</i>	Live Oak	16.5	35	40	<i>fair</i>	
3	<i>Persea americana</i>	Avocado	15,16	30	30	<i>poor</i>	Many decay pockets, 1 dead limb
4	<i>Manilkara zapota</i>	Sapodilla	14,14, 11	35	30	<i>fair</i>	
5	<i>Bucida buceras</i>	Black Olive	31	40	40	<i>fair</i>	
6	<i>Quercus virginiana</i>	Live Oak	28	40	50	<i>fair</i>	On the property line
7	<i>Quercus virginiana</i>	Live Oak	20	35	50	<i>fair</i>	
8	<i>Swietenia mahagonia</i>	Mahogany	10	30	30	<i>fair</i>	On the property line
9	<i>Dyopsis lutescens</i>	Areca Palm	Cl	25	25	<i>fair</i>	
10	<i>Dyopsis lutescens</i>	Areca Palm	Cl	25	15	<i>fair</i>	Ganoderma
11	<i>Quercus virginiana</i>	Live Oak	19,21	35	40	<i>fair</i>	
12	<i>Adonidia merrillii</i>	Christmas Palm	7	30	10	<i>fair</i>	
13	<i>Quercus virginiana</i>	Live Oak	32	45	60	<i>fair</i>	
14	<i>Wodyetia bifurcata</i>	Foxtail Palm	5	15	10	<i>fair</i>	pencilng
15	<i>Dimocarpus longan</i>	Longan	14	25	25	<i>fair</i>	
16	<i>Quercus virginiana</i>	Live Oak	17	40	30	<i>fair</i>	
17	<i>Quercus virginiana</i>	Live Oak	19,15	45	60	<i>fair</i>	
18	<i>Quercus virginiana</i>	Live Oak	25	45	15	<i>fair</i>	
19	<i>Quercus virginiana</i>	Live Oak	20	45	40	<i>fair</i>	
20	<i>Quercus virginiana</i>	Live Oak	12	30	25	<i>fair</i>	
21	<i>Delonix regia</i>	Royal Poincianna	28	40	40	<i>fair</i>	
22	<i>Mangifera indica</i>	Mango	10	20	20	<i>fair</i>	
23	<i>Persea americana</i>	Avocado	6	20	20	<i>fair</i>	
24	<i>Mangifera indica</i>	Mango	18	25	30	<i>fair</i>	
25	<i>Mangifera indica</i>	Mango	16	30	25	<i>fair</i>	
26	<i>Mangifera indica</i>	Mango	12,10, 8	25	30	<i>fair</i>	
27	<i>Mangifera indica</i>	Mango	7,7	15	20	<i>fair</i>	
28	<i>Mangifera indica</i>	Mango	18,10	25	25	<i>fair</i>	
29	<i>Quercus virginiana</i>	Live Oak	10	25	20	<i>fair</i>	
30	<i>Persea americana</i>	Avocado	4,6	20	25	<i>fair</i>	

5

Big Ron's Tree Service is providing this report as a summary of findings of our field survey of trees at 8100 SW 120th St Pinetrest Pl 33156 out on May 15th, 2024. The purpose of this Survey is to identify, measure and document all the trees and palms on this property and their individual condition that can be seen as it relates to its health and safety. Anything peculiar or that which may be considered to be dangerous or have the potential to become dangerous or is abnormal in any way was also examined and stated in this document. Anything noteworthy is documented herein. The intention is to carry out construction activities on this property and some trees may be in the way.

This document was prepared in a format that can be submitted to the county or the individual municipality.

Good: No major physical or health defects were observed that are expected to impact the long-term health or viability of the tree.

Fair: Physical and/or health defects were observed which may compromise the long-term health or viability of the tree but are correctable or can be managed to minimize impact.

Poor: Physical and/or health defects were observed which are expected to directly lead to the death or physical failure of the tree and are not correctable thru typical arboricultural practices.

Dead: Tree is either completely dead or effectively destroyed with no reasonable expectation of recovery.

An examination of the trees was carried out according to the principles and methods laid out in the ISA publication *Best Management Practices: Tree Risk Assessment*. Each tree was examined visually for flaws. Photographs are not included in this report however a map showing the location of each tree is included. The individual DBH was measured using a diameter tape where possible while the height and spread was estimated.

Trees with a DBH of 2 or more inches and a height of 10 feet or more are documented here.

A table was prepared with a list of the trees on this property which includes the standard data used for tree disposition decisions for property owners and government agencies. This is a residential neighborhood. The landscaping consists of trees, palms and lawn grass, most of which are in fair condition. There are Sixteen (16) specimen trees on this property and none of the trees are considered to be invasive as per Village of Pinecrest 's and Miami-Dade county's list of prohibited plant species updated October 2014.

Tree No. 2 and 42 are located on the right of way, 6, 8 and 31 are located on the eastern property line and all other trees are located within this property. See location diagram below.

Tree No 6 is a *Persea americana* commonly called Avocado. This tree is denoted as in poor condition since there are many decaying pockets on the bark, some of which are from pruning cuts.

Palm No. 10 is a *Dypsis lutescens* commonly called Areca palm. This palm has several trunks thinning and a few dead ones. It is likely that it has Ganoderma, however no conchs were visible.

Palms 14 and 45 are *Wodyetia bifurcata* commonly called Foxtail palm. Though they are both considered to be in fair condition they are both penciling. Both trunks are about 8 inches DBH and at the neck it is about 4 inches in diameter. Penciling is usually caused by trimming off the fronds or lack of nutrition. In this case it is likely that the palms are lacking nutrients. This can be treated by adding essential palm nutrients into the soil. Consultation with an arborist is recommended before doing so.

No.	Botanical Name	Common Name	Specimen	Invasive	Condition
1	<i>Cocos nucifera</i>	Coconut	No	No	<i>fair</i>
2	<i>Quercus virginiana</i>	Live Oak	No	No	<i>fair</i>
3	<i>Persea americana</i>	Avocado	No	No	<i>poor</i>
4	<i>Manilkara zapota</i>	Sapodilla	No	No	<i>fair</i>
5	<i>Bucida buceras</i>	Black Olive	Yes	No	<i>fair</i>
6	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
7	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
8	<i>Swietenia mahagonia</i>	Mahogany	No	No	<i>fair</i>
9	<i>Dyopsis lutescens</i>	Areca Palm	No	No	<i>fair</i>
10	<i>Dyopsis lutescens</i>	Areca Palm	No	No	<i>poor</i>
11	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
12	<i>Adonidia merrillii</i>	Christmas Palm	No	No	<i>fair</i>
13	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
14	<i>Wodyetia bifurcata</i>	Foxtail Palm	No	No	<i>fair</i>
15	<i>Dimocarpus longan</i>	Longan	No	No	<i>fair</i>
16	<i>Quercus virginiana</i>	Live Oak	No	No	<i>fair</i>
17	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
18	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
19	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
20	<i>Quercus virginiana</i>	Live Oak	No	No	<i>fair</i>
21	<i>Delonix regia</i>	Royal Poincianna	Yes	No	<i>fair</i>
22	<i>Mangifera indica</i>	Mango	No	No	<i>fair</i>
23	<i>Persea americana</i>	Avocado	No	No	<i>fair</i>
24	<i>Mangifera indica</i>	Mango	Yes	No	<i>fair</i>
25	<i>Mangifera indica</i>	Mango	No	No	<i>fair</i>
26	<i>Mangifera indica</i>	Mango	No	No	<i>fair</i>
27	<i>Mangifera indica</i>	Mango	No	No	<i>fair</i>
28	<i>Mangifera indica</i>	Mango	Yes	No	<i>fair</i>
29	<i>Quercus virginiana</i>	Live Oak	No	No	<i>fair</i>
30	<i>Persea americana</i>	Avocado	No	No	<i>fair</i>
31	<i>Koeleruteria paniculata</i>	Golden rain	No	No	<i>fair</i>
32	<i>Persea americana</i>	Avocado	No	No	<i>fair</i>
33	<i>Mangifera indica</i>	Mango	No	No	<i>fair</i>
34	<i>Mangifera indica</i>	Mango	No	No	<i>fair</i>
35	<i>Quercus virginiana</i>	Live Oak	No	No	<i>fair</i>
36	<i>Mangifera indica</i>	Mango	No	No	<i>fair</i>
37	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
38	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
39	<i>Quercus virginiana</i>	Live Oak	No	No	<i>fair</i>

2

4

40	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
41	<i>Quercus virginiana</i>	Live Oak	Yes	No	<i>fair</i>
42	<i>Sweetenia mahagonia</i>	Mahogany	Yes	No	<i>fair</i>
43	<i>Adonidia merrillii</i>	Christmas Palm	No	No	<i>fair</i>
44	<i>Cornus florida</i>	Dogwood	No	No	<i>fair</i>
45	<i>Wodyetia bifurcata</i>	Foxtail Palm	No	No	<i>fair</i>
46	<i>Adonidia merrillii</i>	Christmas Palm	No	No	<i>fair</i>




Vejaykumar Maharaj
Certified Arborist # FL-10097A
Big Ron's Tree Service LLC
929-389-5118
vejay@bigrontreeservice.com




Digitally signed by:
Vejaykumar Maharaj
Big Ron's Tree Service LLC
16221 SW 98th Ave, Miami Fl 33157
Email: vejay@bigronstreeservice.com
admin@bigronstreeservice.com
Date: 05.18.2024 8:01am

8

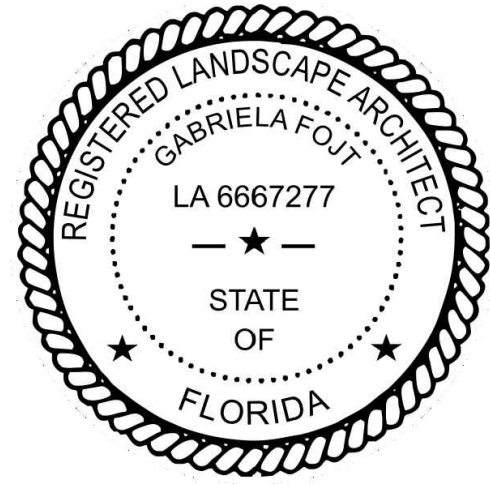

 Gabriela Fojt
LA 6667277
ISA FL-10207A


2300 E Oakland Park Blvd
Suite 208
Fort Lauderdale
FL 33306
c (954) 478 3064
www.florida-landscape.com
gabriela@themirrorofparadise.com

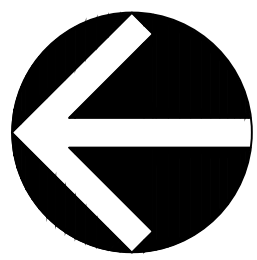

SCALE		AS NOTED
DESIGNED BY		GF
DRAWN BY		KM,GF
CHECKED BY		GF
CAD DWG.		
DATE		01.21.2025
REVISIONS		
per City comments	1	05.19.2025
per City comments	2	06.26.2025
per City comments	3	07.15.2025
per City comments	4	07.29.2025
per City comments	5	08.23.2025

8100 S.W. 120th STREET
PINECREST
FL 33156


ARBORIST'S REPORT

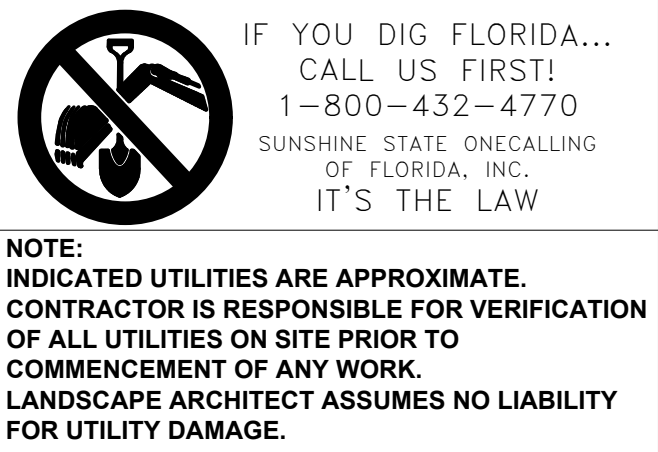

EXISTING TREES									
	TREE#	BOTANICAL NAME	COMMON NAME	DBH	HEIGHT/CT	CANOPY	CONDITION	NOTES	ACTION
A	2	<i>Quercus virginiana</i>	Live Oak	16.5"	35' OA	40'	Fair		TO REMOVE
	4	<i>Manilkara zapota</i>	Sapodilla	14"+14"+11"	35' OA	30'	Fair		TO REMOVE
	5	<i>Bucida buceras</i>	Black Olive	31"	40' OA	40'	Fair		TO REMOVE
	6	<i>Quercus virginiana</i>	Live Oak	28"	40' OA	50'	Fair	MIGHT BE ON PROP. LINE	TO REMOVE
	7	<i>Quercus virginiana</i>	Live Oak	20"	35' OA	50'	Fair		TO REMOVE
	8	<i>Swietenia mahagoni</i>	West Indian Mahogany	10"	30' OA	30'	Fair	ON PROP. LINE	TO REMOVE
	29	<i>Quercus virginiana</i>	Live Oak	10"	25' OA	20'	Fair	on property line	TO REMOVE
	31	<i>Koelreuteria paniculata</i>	Golden rain	7"	30' OA	25'	Fair	ON PROP. LINE	TO REMOVE
	37	<i>Quercus virginiana</i>	Live Oak	21"	35' OA	50'	Fair		TO REMOVE
	38	<i>Quercus virginiana</i>	Live Oak	19"	40' OA	35'	Fair		TO REMOVE
B	39	<i>Quercus virginiana</i>	Live Oak	13"	25' OA	20'	Fair		TO REMOVE
	40	<i>Quercus virginiana</i>	Live Oak	19"	35' OA	30'	Fair		TO REMOVE
	41	<i>Quercus virginiana</i>	Live Oak	21"	35' OA	35'	Fair		TO REMOVE
	42	<i>Swietenia mahagoni</i>	Mahogany	23"	40' OA	40'	Fair		TO REMOVE
	43	<i>Delonix regia</i>	Royal Poinciana double trunk	4"+4"	30' OA	20'	VOLUNTEER/poor		TO REMOVE




The Mirror of Paradise



Gabriela Fojt
LA 6667277
ISA FL-10207A

2300 E Oakland Park Blvd
Suite 208
Fort Lauderdale
FL 33306
c (954) 478 3064
www.florida-landscape.com
gabriela@themirrorofparadise.com

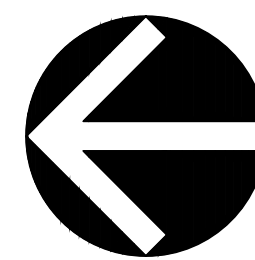


SCALE	1/16"=1'-0"	
DESIGNED BY	GF	
DRAWN BY	KM,GF	
CHECKED BY	GF	
CAD DWG.		
DATE	01.21.2025	
REVISIONS		
per City comments	1	05.19.2025
per City comments	2	06.26.2025
per City comments	3	07.15.2025
per City comments	4	07.29.2025
per City comments	5	08.23.2025

8100 S.W. 120th STREET
PINECREST
FL 33156

LANDSCAPE PLAN, PLANT SCHEDULE, CODE CHART

A PINECREST PUBLIC WORKS TYPICAL SWALE AREA
not to scale

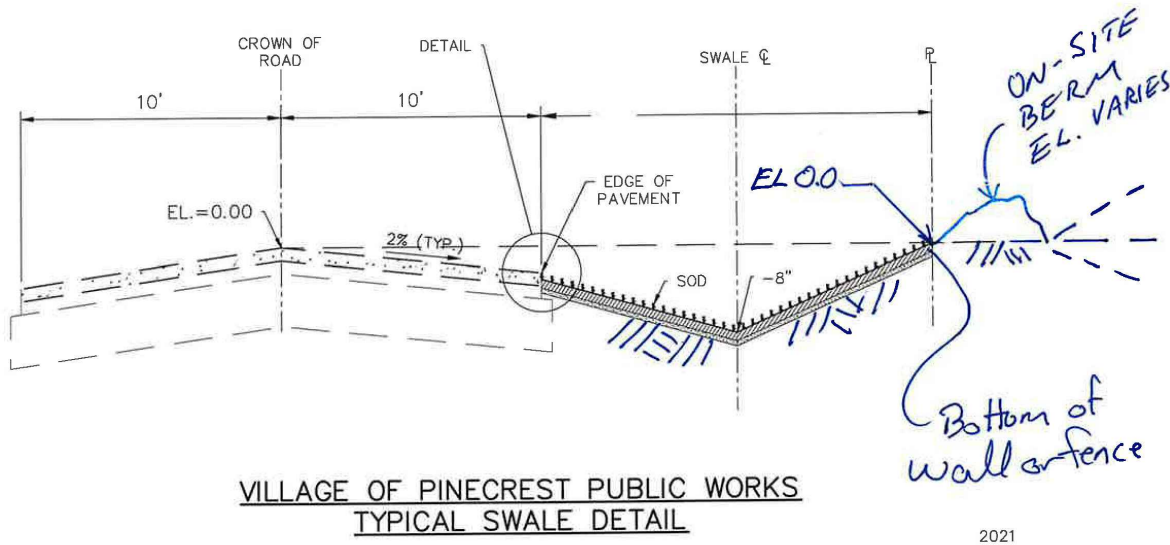

D NOTES

JOB CONDITIONS:

Any building construction material or foreign material shall be removed from planting areas and replaced with acceptable top soil.

Care shall be taken not to disturb or damage any underground construction or utilities. Any damage to these facilities during the planting operations will be repaired at the expense of the Landscape Contractor in a manner approved by the Owner. Where underground obstructions will not permit the planting materials in accordance with the plans, new locations shall be approved by the Landscape Architect.

Landscape work shall be coordinated with the landscape irrigation work. Landscape Contractor shall ensure that no plantings will interfere with the proper coverage. Landscape Contractor shall point out situations where minor adjustments or relocation or addition of sprinklers heads may be most beneficial for the landscape work as a whole.

PLANT MATERIAL:

Plant species and size shall conform to those indicated on the drawings. Nomenclature shall conform to STANDARDIZED PLANT NAMES, LATEST EDITION. All plant material shall be in accordance with GRADES AND STANDARDS FOR NURSERY PLANTS, latest edition published by the Florida Department Agriculture and Consumer Services. All plants not otherwise specified as Florida Fancy, or Specimen, shall be Florida Grade Number 1 or better as determined by the Florida Grade Plant Industry. Specimen means an exceptionally heavy, symmetrical, tightly-knit plant, so trained or favored in its development that its appearance is unquestionable and outstandingly superior in form, number of branches, compactness and symmetry. All plants shall be sound, healthy, vigorous, well branched and free of disease and insect eggs and larvae and shall have adequate root systems. Trees and shrubs for planting rows shall be uniform in size and shape. All materials shall be subject to approval by the Landscape Architect. Where any requirements are omitted from the Plant List, the plants furnished shall be normal for the variety.

All container grown material shall be healthy, vigorous, well-rooted plants and established in the container. The plants shall have tops which are good quality and are in a healthy growing condition. An established container grown plant shall be transplanted into a container and grown in that container long enough for the new fibrous roots to have developed enough to hold the root mass together when removed from the container. Root bound plants will not be accepted.

Site water shall be verified by Contractor prior to submission of bids.

The use of natural material is strongly encouraged for balled and burlapped plants. All synthetic material shall be completely removed from root ball PRIOR to planting.

At time of bid, Contractor shall submit a written schedule of all sources for coconut palms as well as seed sources for coconuts. Coconuts shall be certified Malayan Green with a certified seed source from Jamaica.

TREES:

The most critical factor for selecting a healthy Florida Number 1 tree is the structure. This consists of one central main trunk and leader. Branches are considered competing if they are 2/3 the diameter of the leader or greater. Competing branches may be acceptable if they occur above 50% of the overall height of the tree. Caliper of tree should meet specifications. Leader (center trunk) may have slight (<15 degree) bow (Tabebuia caraiba excluded), but must be intact with apical (leading) bud.

Branches should be spread evenly (staggered, alternating) through the tree branches spaced no closer than 4".

Canopy should be full to specifications with little or no openings or holes. A thinning canopy will be taken into consideration with field dug plant material.

Trees should have no open wounds or damage, flush cuts, chlorosis, shorter or taller than specified height, girdling roots, undersize loose root ball, crossing branches, smaller than normal leaves.

10% of root ball shall be above grade after planting. Root ball tying ropes removed from trunk and top of root ball.

MULTIPLE TRUNK TREES:

Trees having no distinct leader. Trunks on these trees should not be touching and free of damage and similar in size. Canopy should be full and uniform.

IRRIGATION

Provide bubblers on separate zones for all newly planted and transplanted trees unless alternate approach to provide additional water is approved by owner and Landscape Architect.

MATERIALS LIST:

Landscape Contractor shall be responsible for verifying all quantities for material shown on drawings prior to submitting a bid. Planting plan shall take precedence over the plant list. Final quantity of sod and mulch shall be verified.

SUBSTITUTIONS:

No substitutions shall be made without the approval from the Landscape Architect and/or the Owner. Intended substitutions shall be indicated on the bid.

MEASUREMENTS:

Canopy Trees- Height shall be measured from the ground to the average height of canopy. Spread shall be measured to the end of branching equally around the crown from the center of the trunk. Caliper (d.b.h.) will be measured 4'-6" above grade.

Shrubs- Height shall be measured from the ground. Spread shall be measured to the end of branching equally around the shrub mass.

Palms- Clear trunk (C.T.) shall be measured from the ground to the point where the mature aged trunk joins the immature or green part of the trunk or head.

Overall height (O.A.) shall be measured from the ground to the tip of the unopened bud.

IRRIGATION:

100% irrigation coverage shall be provided. Provide bubblers on separate zones for all newly planted and transplanted trees unless alternate approach to provide additional water is approved by Owner and Landscape Architect.

GUARANTEE:

All new plant materials shall be guaranteed for one year from the time of acceptance and shall be alive and in satisfactory growth for each specific kind of plant at the end of the guarantee period. The Landscape Contractor shall not be responsible for damage caused by vandalism, violent wind storms or other acts of God beyond control. Replacement shall occur within two weeks of rejection and guaranteed six months from date of installation. Landscape Contractor shall repair damage to other plants or lawns during plant replacements at no additional cost.

MULCH:

Mulch shall not contain sticks 1/4" in diameter or stones. Apply 3" of mulch except on top of tree rootballs and against woody shrubs. Rootballs will receive less than 1" mulch with no mulch touching trunk or root collar. Do not apply mulch against the trunks of woody shrubs.

SOD:

All sod shall be installed in such a manner that there is an even surface, staggered pattern. Sod will be green in color and in good health. NO overlap, gaps, damage, insects, disease and less than 10% chlorosis will be permitted. All gaps will be filled with clean native soil.

STAKING:

Landscape Contractor to suggest alternate means of staking for approval with Landscape Architect if staking methods shown are not feasible due to site conditions.

FERTILIZER:

Manufacturer's Specification: Submit manufacturer's specification sheet(s) for approval of product. Submit tags from bags of fertilizer used on site to the Architect. Submit copies of the manufacturer's specifications or analysis of all fertilizer for approval.

Composition and Quality: All fertilizer shall be uniform in composition and dry. Granular fertilizer shall be free flowing and delivered in unopened bags. Tablet fertilizer shall be delivered in unopened containers or boxes. All bags, containers or boxes shall be fully labeled with the manufacturer's analysis.

Fertilizer shall be slow release with ratio greater than 3 to 1 nitrogen to phosphorous applied on top of backfill, per manufacturer's recommendations.

All shall comply with the State of Florida fertilizer laws.

CLEANUP:

Landscape Contractor shall at all times keep job site clean and free from accumulation of waste material, debris and rubbish.


INSPECTION:

Upon written request from the Contractor, Owner and/or Landscape Architect shall perform inspection to determine completion of Contract.


ACCEPTANCE:

Following inspection, Contractor will be notified, in writing, by Owner and/or Landscape Architect of acceptance of completion with regards to plant material and workmanship according to Contract.



B TREE PROTECTION DETAIL
not to scale

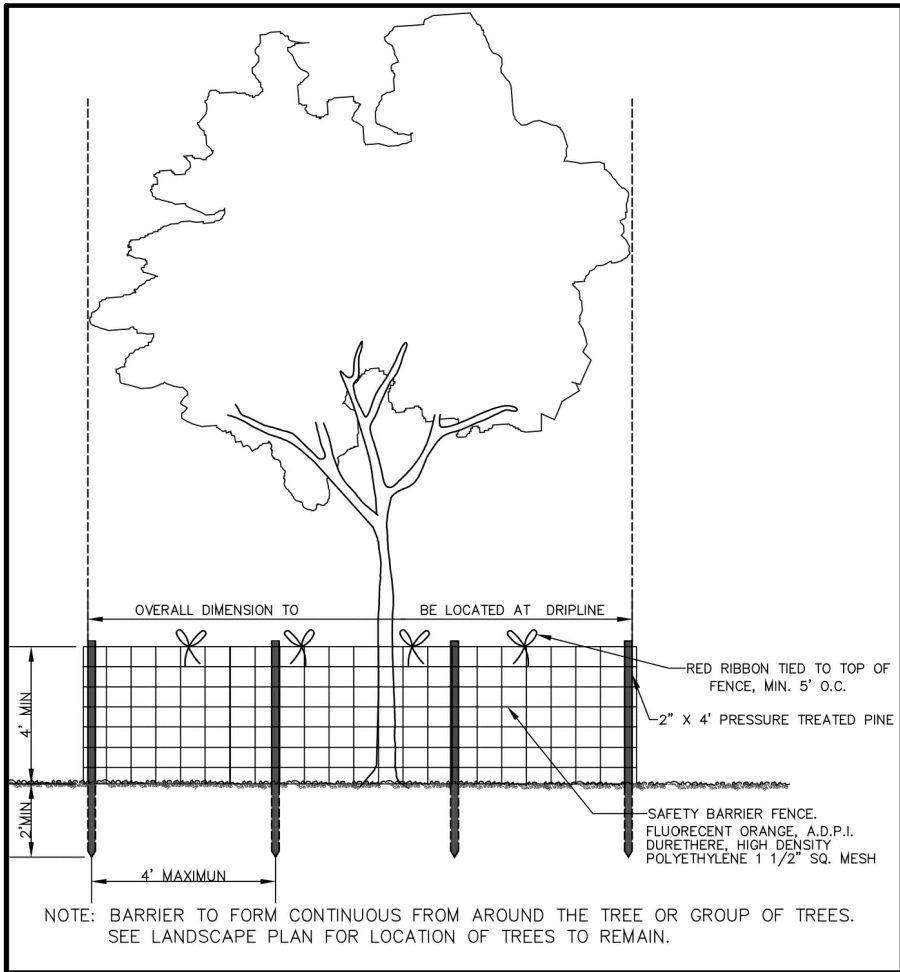

E PLANTING DETAILS
not to scale

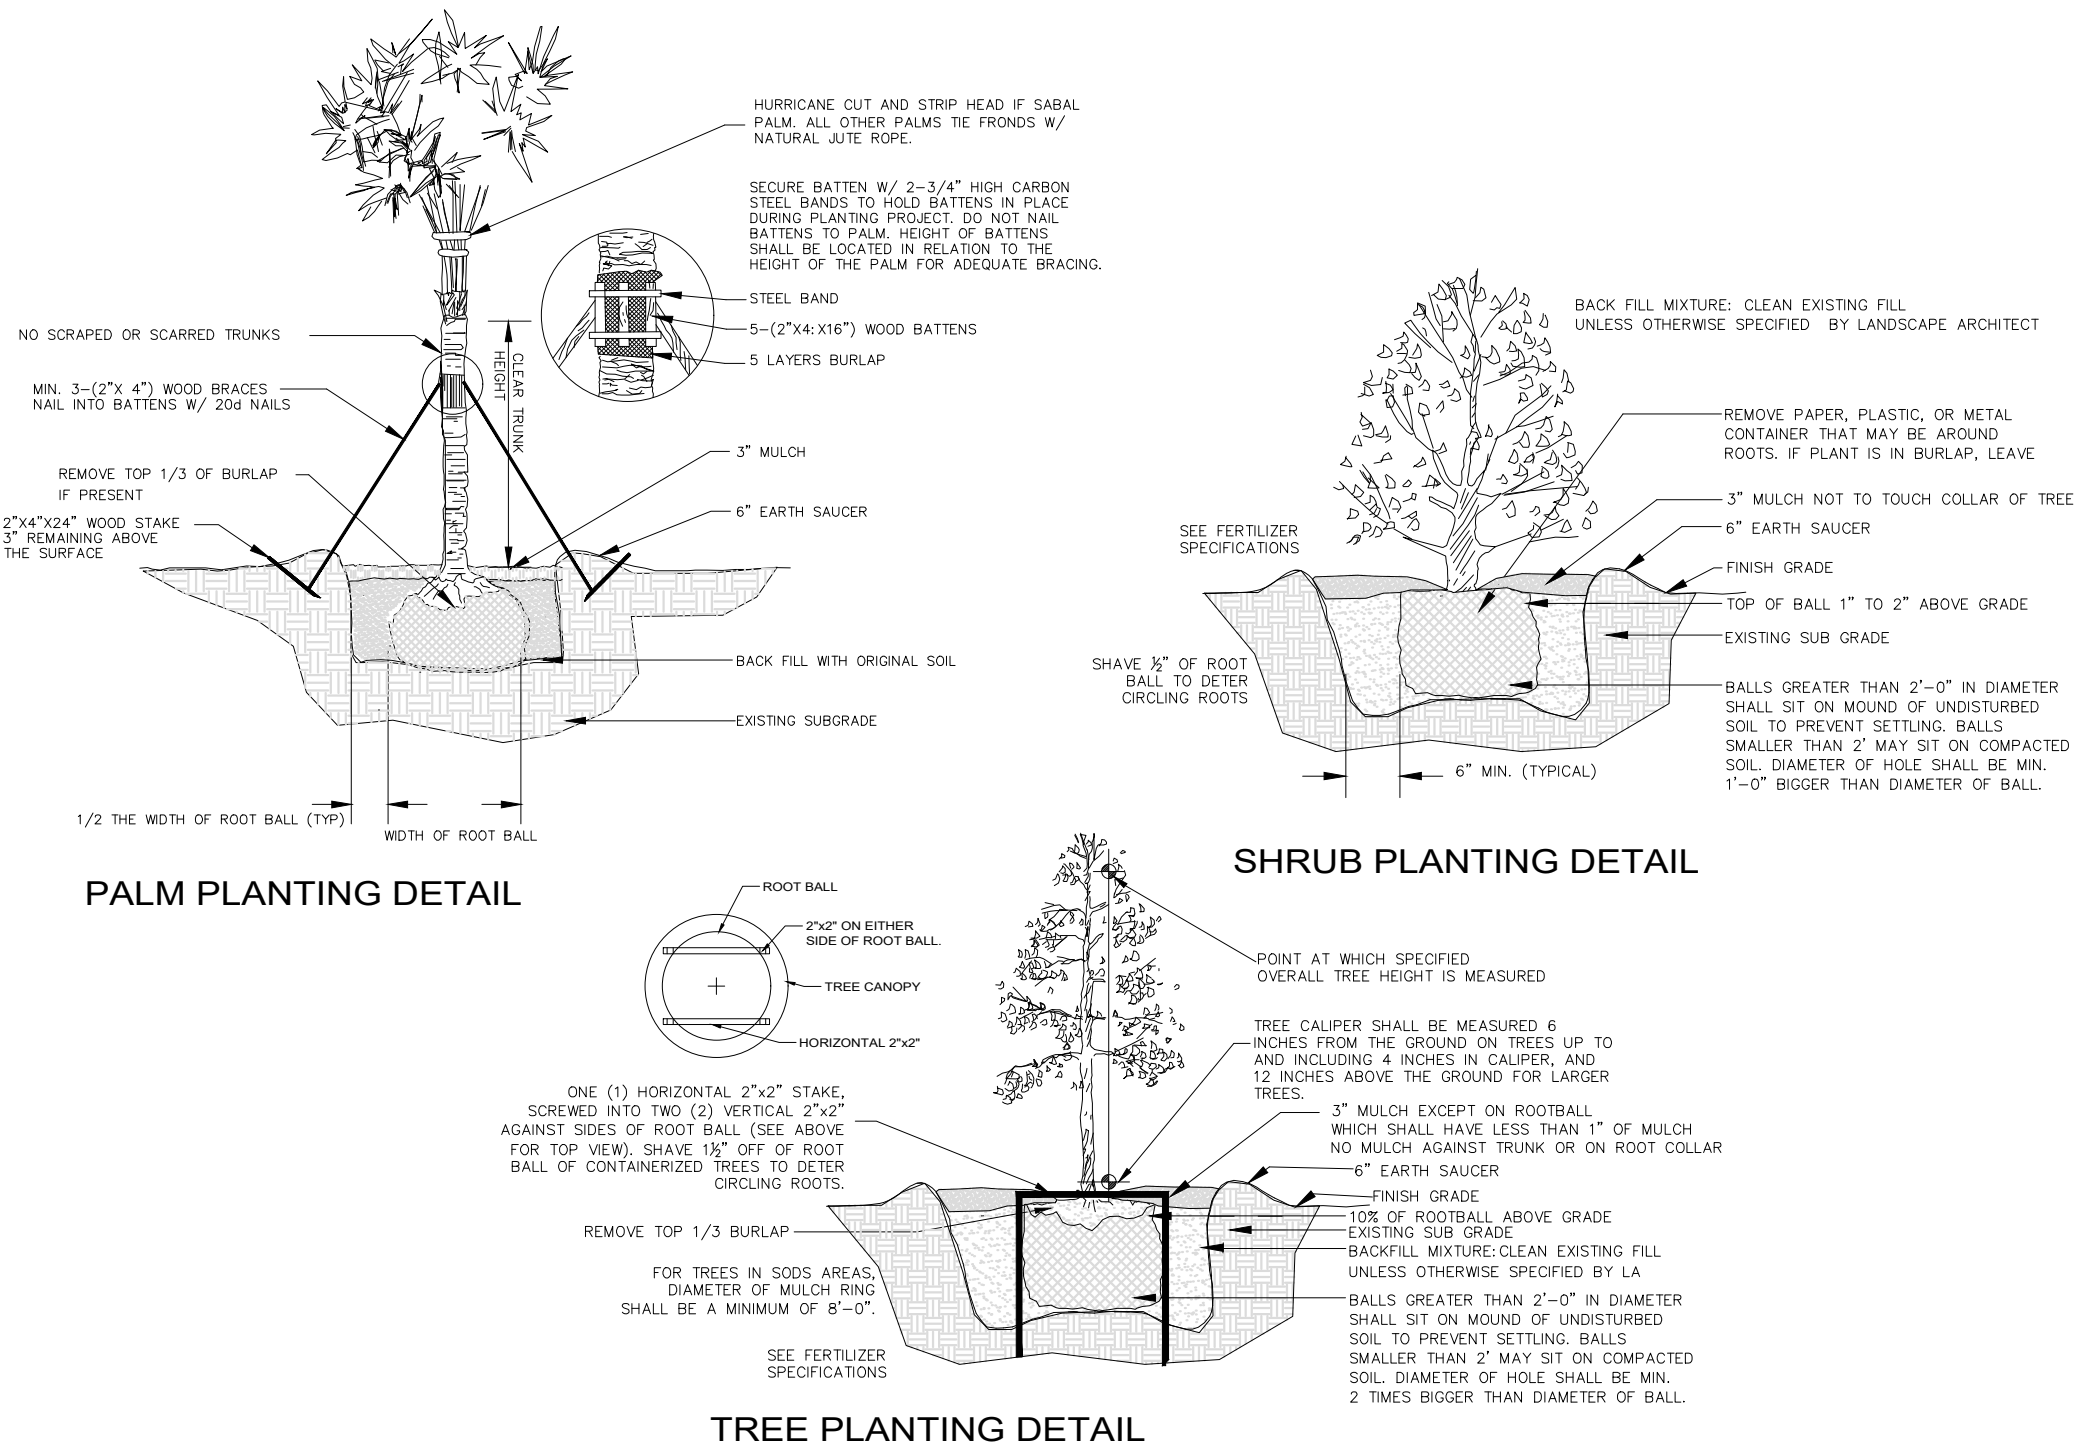


C ROOT BARRIER
not to scale

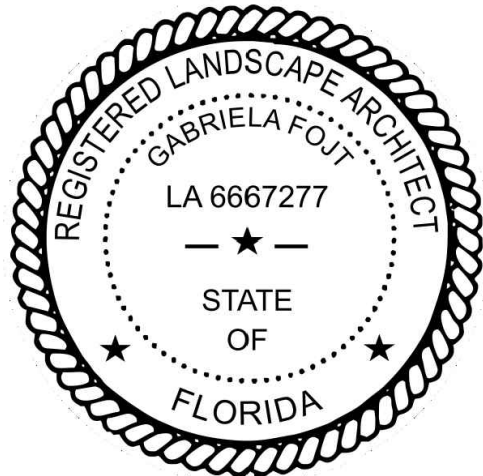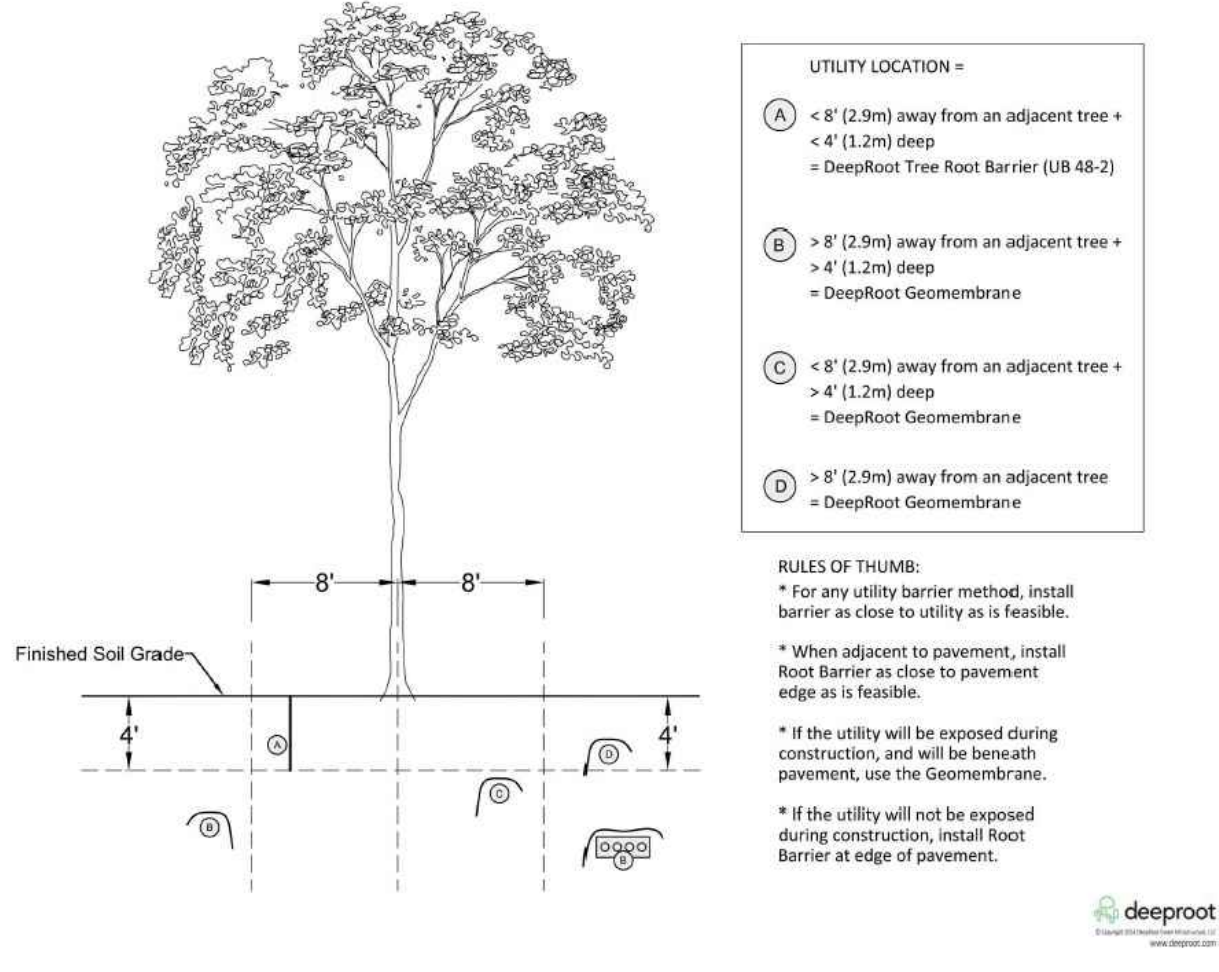

The Mirror of Paradise

Gabriela Fojt
LA 6667277
ISA FL-10207A

2300 E Oakland Park Blvd
Suite 208
Fort Lauderdale
FL 33306
c (954) 478 3064
www.florida-landscape.com
gabriela@themirrorofparadise.com

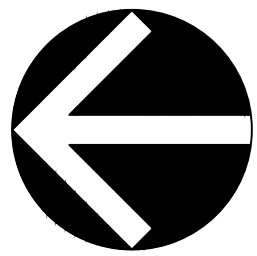

SCALE	as noted
DESIGNED BY	GF
DRAWN BY	KM,GF
CHECKED BY	GF
CAD DWG.	
DATE	01.21.2025
REVISIONS	
per City comments	05.19.2025
per City comments	06.26.2025
per City comments	07.15.2025
per City comments	07.29.2025
per City comments	08.23.2025

8100 S.W. 120th STREET
PINECREST
FL 33156

NOTES & DETAILS