BL2026-0415 APPROVED
vwalters06/16/2026 3:21:37 PM

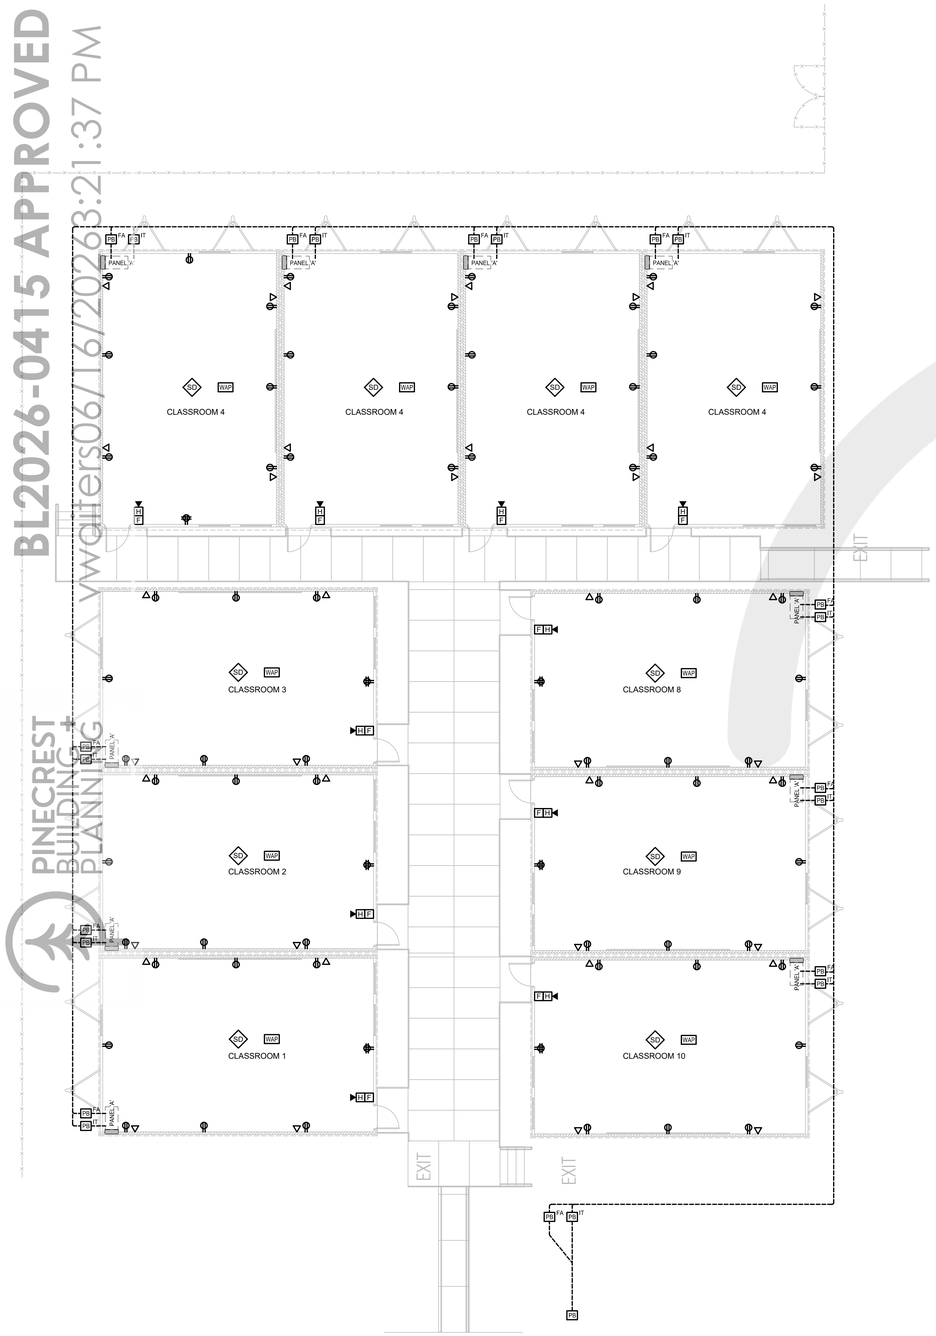

1 E-201 **MODULAR FLOOR PLAN - POWER AND SYSTEMS**

NOTE: (FOR REFERENCE ONLY) ALL PANELS AND BRANCH CIRCUIT(S) WIRING BY TRAILER MANUFACTURER.

SCALE: 1/8" = 1'-0"

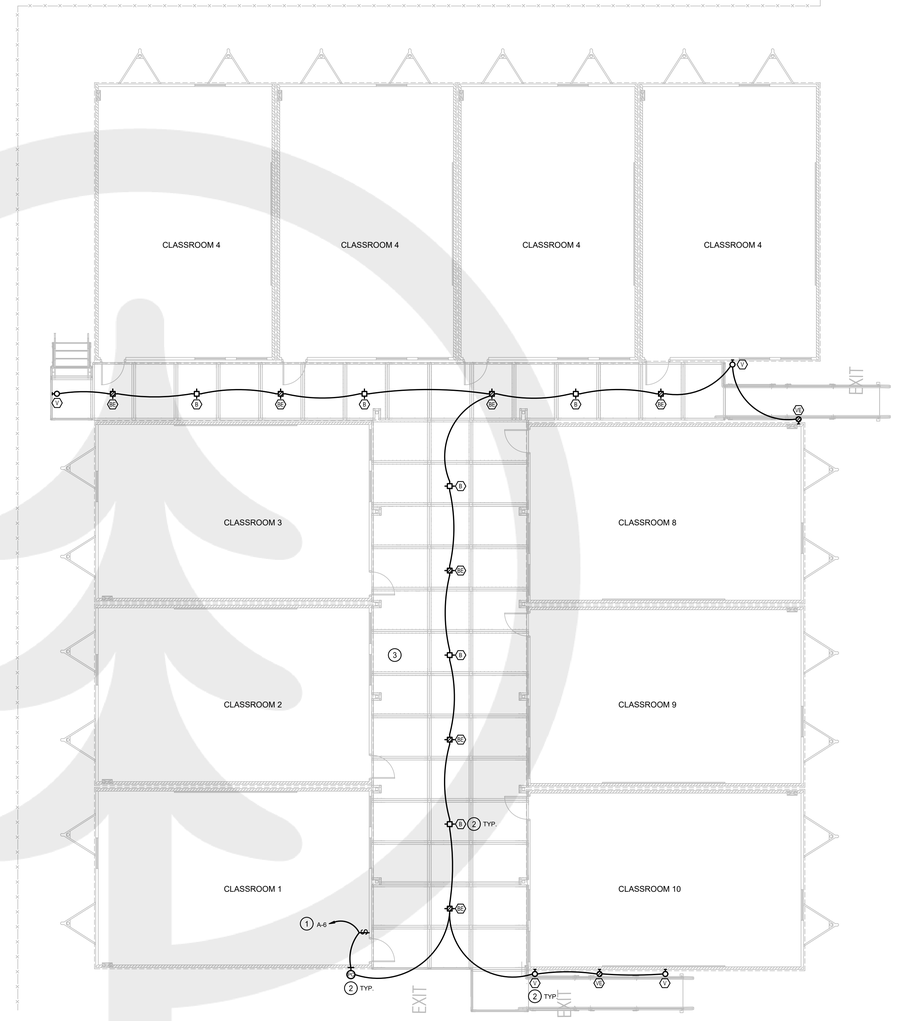

2 E-201 **MODULAR FLOOR PLAN - LIGHTING** 2

NOTE: ALL TRAILER INTERIOR LIGHTING AND WIRING BY TRAILER MANUFACTURER.

SCALE: 1/8" = 1'-0"

SCHEDULE OF LIGHTING EQUIPMENT AND LAMPS

FIXT. TYPE	MANUF.	CATALOG NUMBER	LAMPS	TYPE OF FIXTURE	MOUNTING REC	MOUNTING SUR	MOUNTING SUS	VOLTS	NOTES
B	LITHONIA - -	LDN4SQ-40/20-LS4AR-LD-GZ10-TRW - -	22.12W LED - -	RECESSED 4" SQUARE DOWN-LIGHT -	●			120V	- - -
BE	LITHONIA - -	LDN4SQ-40/20-LS4AR-LD-GZ10-TRW-EL - -	22.12W LED - -	RECESSED 4" SQUARE DOWN-LIGHT WITH EMERG. BATTERY -	●			120V	- -
V	LITHONIA - -	WDGE1-LED-P2-40K-80CRI-VW-SRM-DNAXD - -	15W LED - -	ARCHITECTURAL WALLPACK, TRAPEZOID -		●		120V	- - -
VE	LITHONIA - -	WDGE1-LED-P2-40K-80CRI-VW-SRM-DNAXD-E4WH - -	15W LED - -	ARCHITECTURAL WALLPACK, TRAPEZOID WITH EMERGENCY BATTERY		●		120V	- - -

PLAN NOTES

1. CONNECT CANOPY LIGHTING TO PANEL 'A' CIRCUIT 6, 1P-20A SPARE CIRCUIT IN PORTABLE #1.
2. LIGHTING CONTROL VIA PHOTOCELL. LIGHTING SWITCH PHOTOCELL, WIRING AND CONDUIT SHALL BE PROVIDED BY CONTRACTOR.
3. CONTRACTOR SHALL SUBMIT PHOTOMETRIC CALCULATIONS FOR NORMAL AND EMERGENCY LIGHTING LEVELS VERIFYING COMPLIANCE WITH MINIMUM OF NFPA 101 LIGHTING LEVELS.

PERMIT SUBMITTAL

JOHNSON, LEVINSON RAGAN, DAVILA, INC.
CONSULTING ENGINEERS
140 Centeport Drive, Suite 100
Miami Lakes, Florida 33016
(305) 820-8100 F: (305) 558-0202 FAX
www.jlrd.com
Certification Number 6050

Project
GulliverPrep
TEMPORARY CLASSROOMS
6575 North Kendall Drive
PINECREST, FL 33156

Client
GULLIVER SCHOOL PREPARATORY

Architect
AAC001431
ZYSCOVICH ARCHITECTS
Jack N. Zyscovich, Jr. AIA
President
Ivan M. Zyscovich, AIA
Vice President
t: 305.371.1222
f: 305.372.2222
e: info@zyscovich.com
w: www.zyscovich.com
100 BISCAYNE BLVD, 27th FLOOR
MIAMI, FL 33132
t 305.372.2222
e info@zyscovich.com
w www.zyscovich.com

Seal
KEITH E. LORINCE STATE OF FLORIDA PROFESSIONAL ENGINEER No. 73794
JASON A. SINCHCOMB STATE OF FLORIDA PROFESSIONAL ENGINEER No. 58184
03/17/2026
Keith E. Lorince P.E.# 73794
Jason A. Sinchcomb P.E.# 58184

COPYRIGHT 2026 - THE ZYSCOVICH, INC.
ALL RIGHTS RESERVED. THESE DRAWINGS AND SPECIFICATIONS ARE INSTRUMENTS OF SERVICE AND SHALL REMAIN THE PROPERTY OF ZYSCOVICH, INC. WHETHER THE PROJECT FOR WHICH THEY WERE PREPARED IS EXECUTED OR NOT. THEY ARE NOT TO BE USED IN ANY MANNER ON OTHER PROJECTS OR EXTENSIONS TO THIS PROJECT EXCEPT BY THE AGREEMENT IN WRITING AND WITH THE APPROPRIATE COMPENSATION TO ZYSCOVICH, INC. REPRODUCTIONS OF SPECIFICATIONS WITHOUT THE WRITTEN CONSENT OF ZYSCOVICH, INC IS PROHIBITED.

Rev	Date	Note

MODULAR FLOOR PLANS - ELECTRICAL

2025-0568-ASR1 | 02-18-2026

E-201